
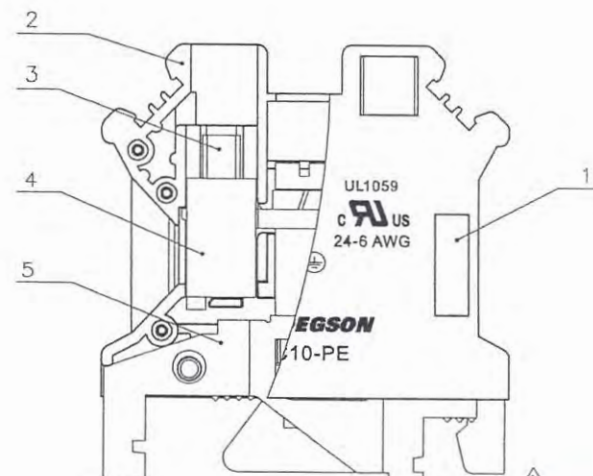
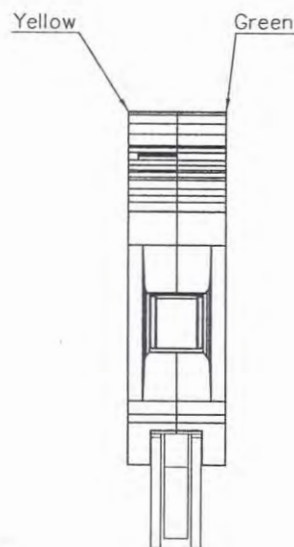
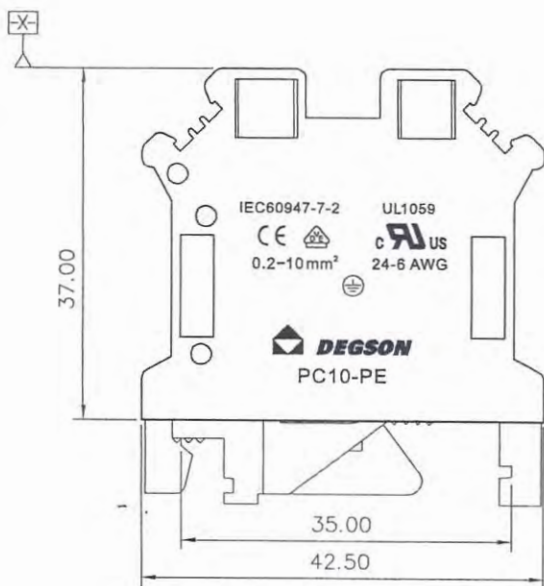


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△	16-0352	视图方向修改	JL	11/07/16"



NOTES1:

UL Standard

- 1.Torque value : M4 , 10.53Lb.in
- 2.Wire range : 24~6AWG

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV

- 2.Torque value : M4 , 1.2N·m
- 3.Wire range : 0.2~10mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.20mm, Poles : N=01P
- 3.Stripping length : 9~10mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				—	0.1	10
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150			
								0.1/10	
									<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2°