
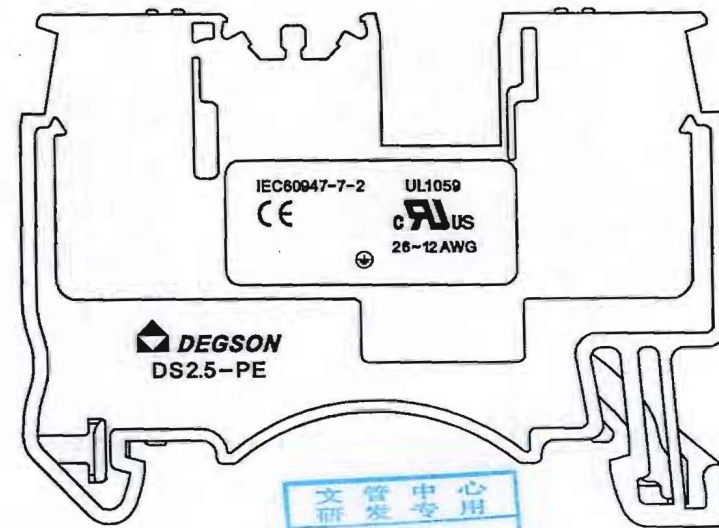
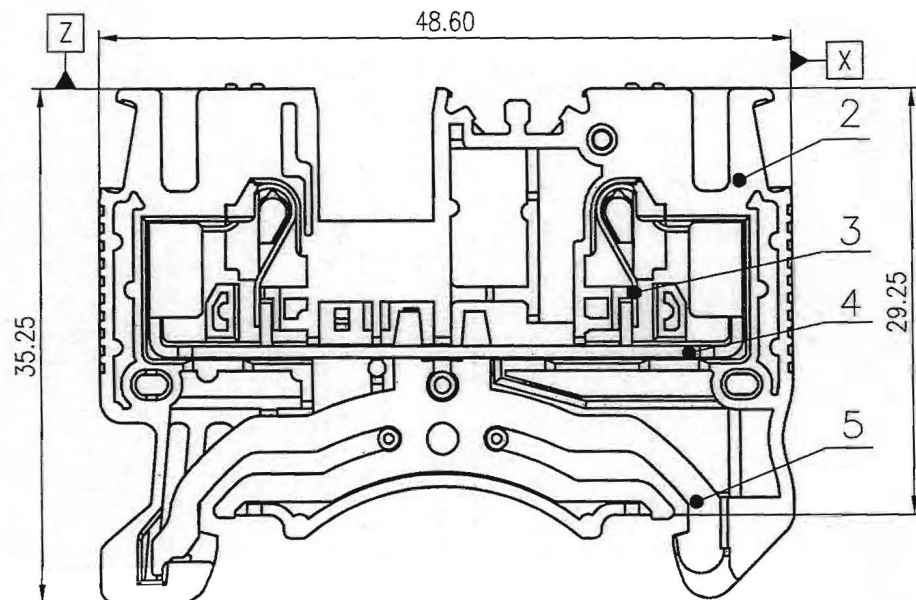


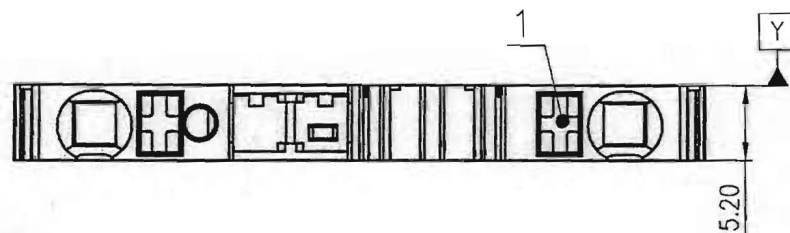

NOTES1:

UL Standard

1.Wire Range : 26~12AWG

IEC Standard

1.

Pollution Degree	3
Overvoltage Category	III
Rate Impulse Voltage(KV)	8.0KV
Rate Voltage(V)	/
Rate Current(A)	/

2.Wire Range : 0.2~2.5mm²;sol:4mm²

NOTES2:

1.Dimension shall be interpreted per

ASME Y14.5-2009

2.Pitch : 5.20mm, Poles : 01P

3.Stripping length : 10~12mm

4.Operating temperature:-40°C~+105°C

5.Undimensioned Tolerances:

Pitch Range In mm	Nominal Dimension Range In mm	
Over 6 TO 10	Over 30 TO 60	Over 100 TO 150
Over 10 TO 24	Over 60 TO 100	Over 150 TO 200
Over 24 TO 30	Over 100 TO 150	Over 200 TO 250
±0.15	±0.20	±0.30
±0.30	±0.50	±0.70
±0.50	±1.00	±1.30
±2*		

6.RoHS Compliance



5	Grounding	Copper alloy	Sn plated
4	Current Carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Housing	PA66	UL94V-0
1	Button	PA66+GF%	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DS2.5-PE-01P-1C-00A(H)	
APPD: Jacky.Li 2019.9.3		DRAWING NO.: DS2.5-PE-C01	
CHKD: mek 2019.09.02		REV TO	
DRFT: HuangS 2019.08.28		TYPE: CUSTOMER DRAWING	
SIZE: A4	mm (inch)	SCALE: 2:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE