

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless express authorization is granted. Violators will be liable for compensation. All rights reserved. 复制或再行发布此文件以及其内容之利用或传播均须经本公司明确授权, 否则禁止转让、复制、利用、交还本文件内容, 侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计之所有权利。

FOR-1755 Rev.1.3

2

3



4

5


6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

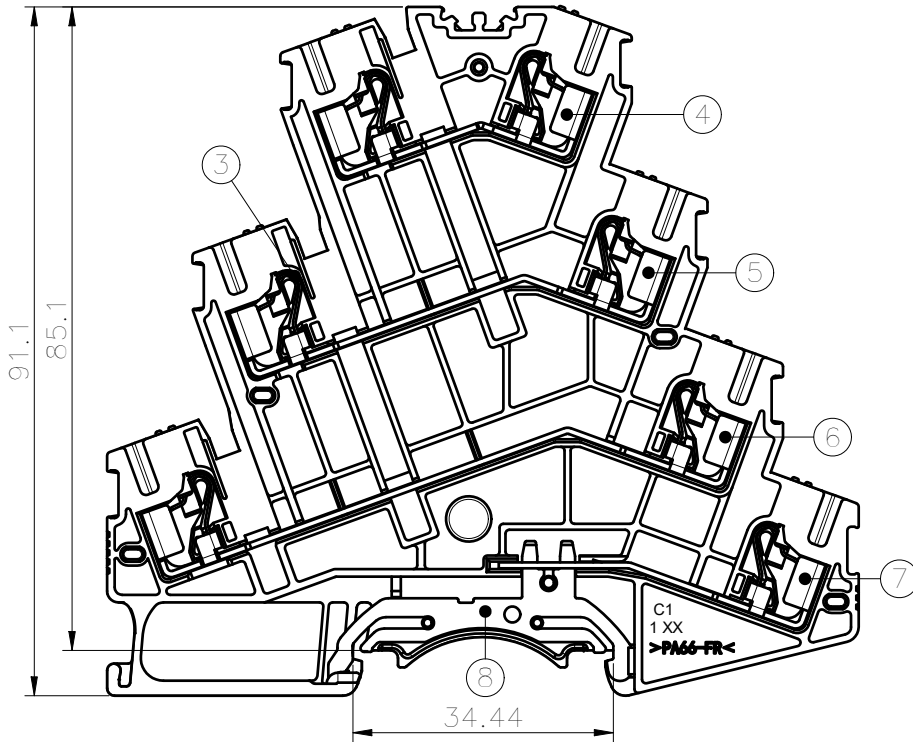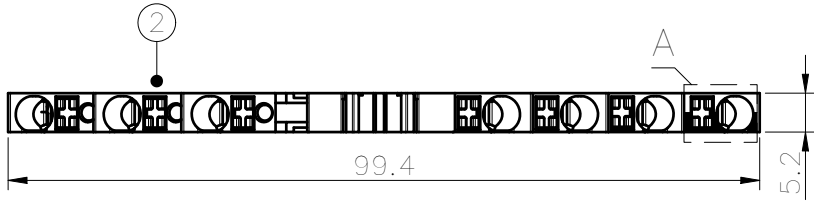

Please refer to the 3D model, for these unmarked dimensions.

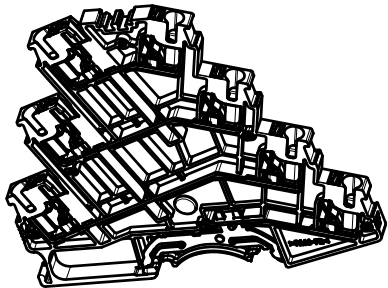


A
2:1

This surface is Yellow.



This surface is Green.

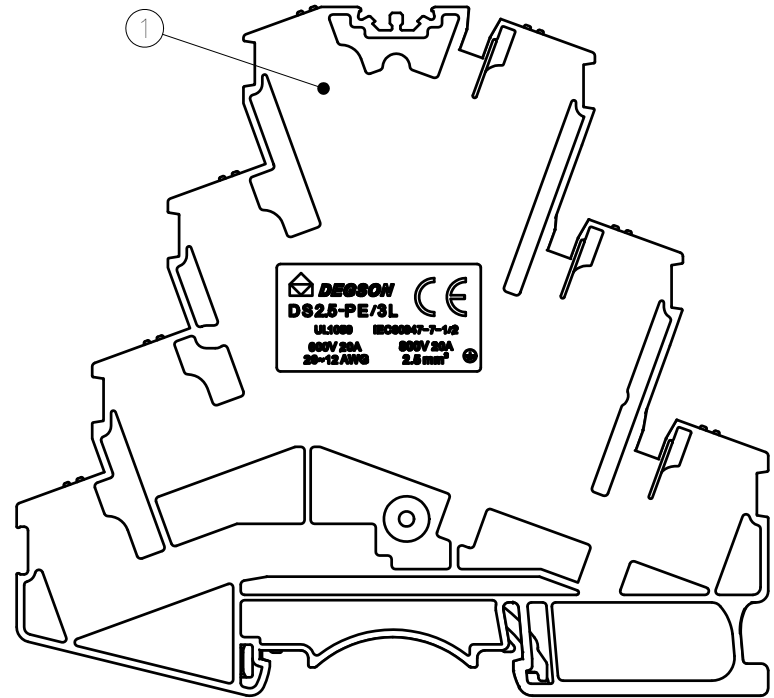

8	Grounding	Copper alloy	Sn Plated
7	Current carrier 4	Copper	Sn Plated
6	Current carrier 3	Copper	Sn Plated
5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL Standard	B	C	D
额定电压 / Rated Voltage(V)/Current(A)	400/20	400/20	/
UL Standard	III/3	III/2	II/2
污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压 / Rated Voltage(V)/Current(A)	400/20	/	/
额定冲击电压 / KV/Short impulse Voltage(kV)	2.5	2	2
最大负载电流 / Maximum load current	25A 具有 4mm ² 导线横截面, 刚性 / with 4 mm ² conductor cross section, rigid		
线径范围 / 硬线和软线 / Wire Range(rigid and flexible)(AWG/mm)	26~12/0.2~2.5&4(SOL)		
间距 / Pitch(mm) / 线数范围 / Pairs	5.20/NoDTP		
绝缘长度 / Insulation length(mm)	10~12		
使用温度范围 / Operating temperature(°C)	-40~+105		
符合 RoHS / 符合 RoHS	Yes		
标准颜色编号 / Standard color number: PANTONE /RAL			

00		首版发行	米帅	2021.08.18
REV	ECN	DESCRIPTION	DRFT	DATE

DEGSON		MATERIAL:		SURFACE:	
APPD: 李根芳		2021.08.18		MAT NO./REV: 11040000188-1 / 00	
CHKD: 马恩开		2021.08.18		NAME	
DRFT: 米帅		2021.08.18		DS2. 5-PE/3L-01P-11-00A(H)	
DRAWING NO.		TYPE		DRAWING STATUS	
200008727		CUSTOMER DRAWING		已发布	
SCALE		SHEET		1:1	
1:1		1/1			