
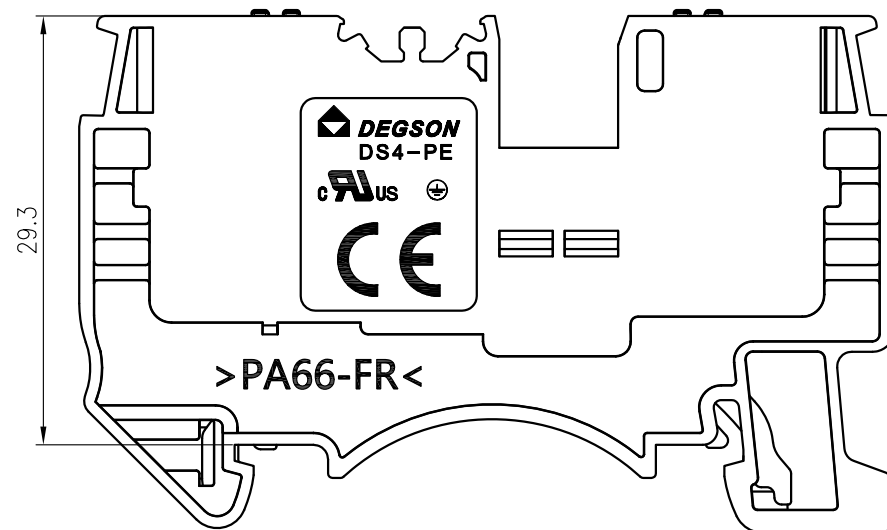
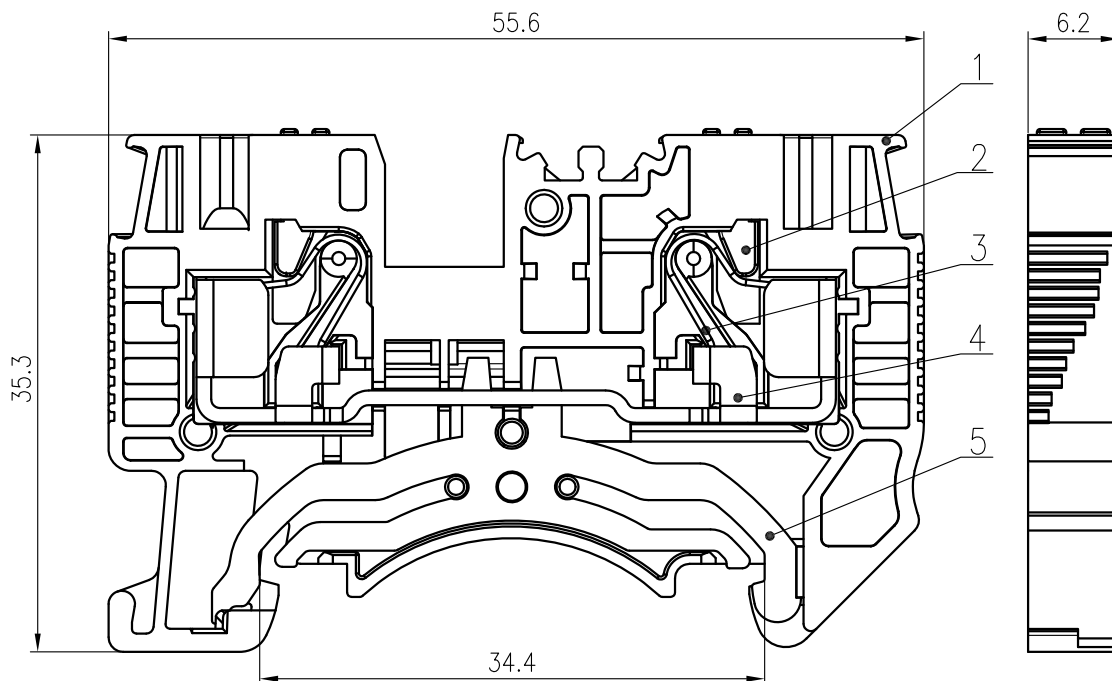



未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

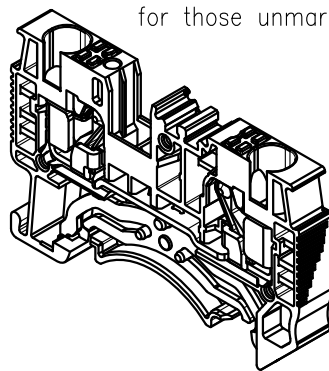


Please refer to the 3D model,
for those unmarked dimensions

**active**

5	Grounding	Copperalloy	Sn plated
4	Current Carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL: /		SURFACE: /	
MAT NO.:		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2020.11.27		NAME: DS4-PE-01P-1C-00A(H)	
CHKD: Mao J 2020.11.27			
DRFT: Chen K 2020.11.27		DRAWING NO.: DS4-PE-C01	
		REV TO	
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 2:1	SHEET 1/1