
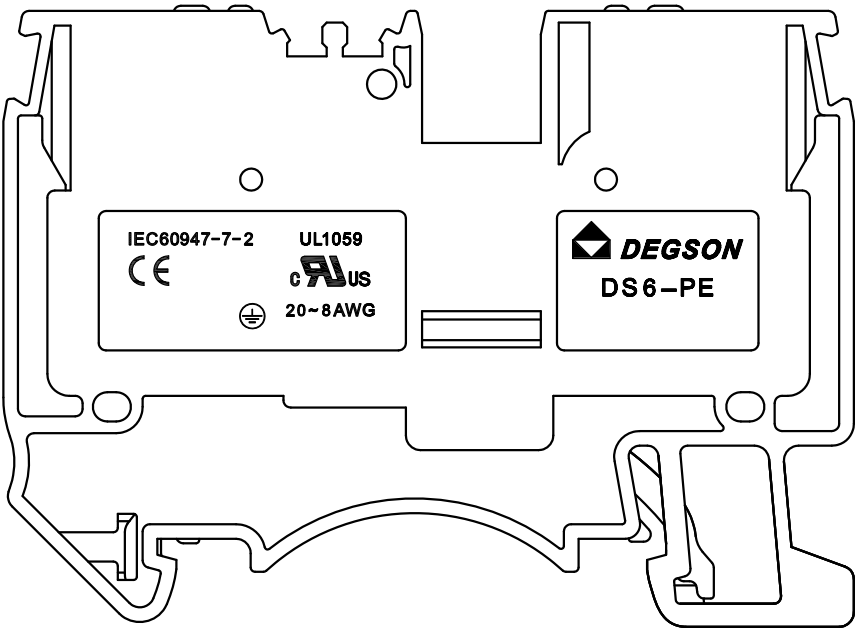


未注公差/General tolerances(mm)												0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	
3	6	10	18	30	50	80	120	180	250	315	400	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.50

A

A

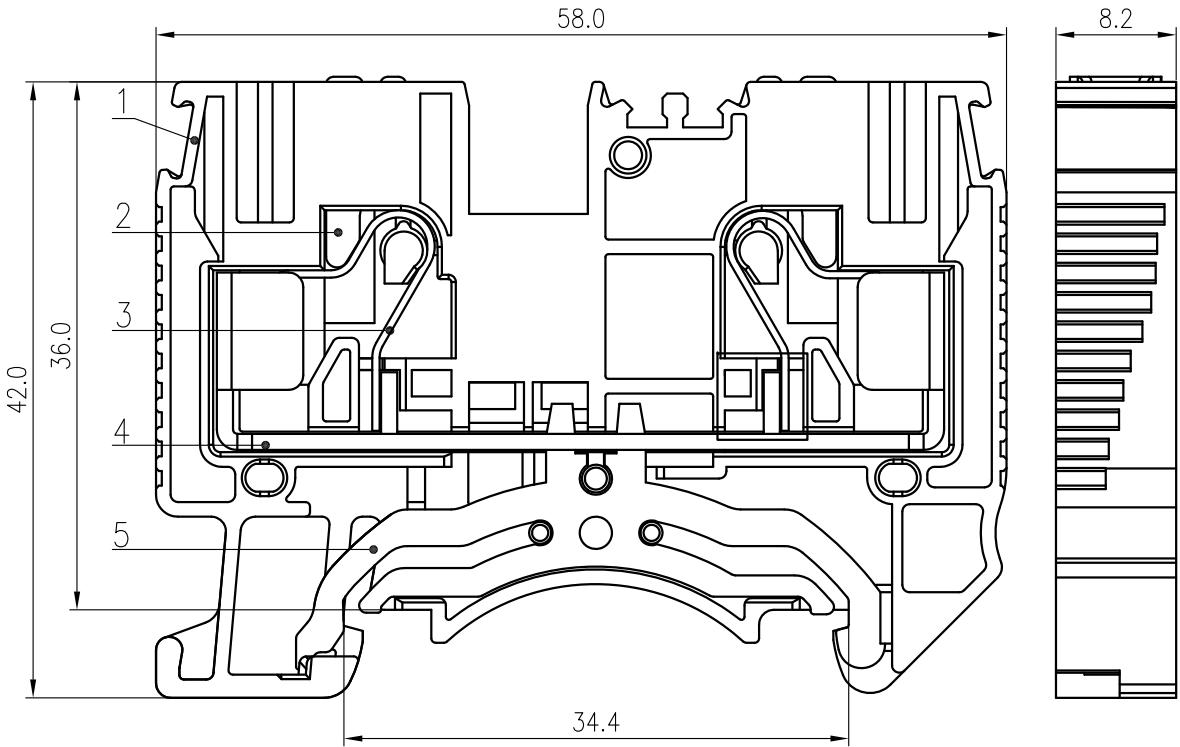

B

C

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.5~6,10(Sol)/20~8		
间距/Pitch(mm)	8.2		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		



D

D

5	Grounding	Copper alloy	Sn plated
4	Current Carrier	Copper	Sn plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

T1	/	Replace the drawing frame	Chen K	2020.06.01
REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2020.06.01	NAME: DS6-PE-01P-1C-00A(H)	
CHKD:	Mao J 2020.06.01		
DRFT:	Chen K 2020.06.01	DRAWING NO.:	DS6-PE-C01
SIZE:	A4	TYPE:	CUSTOMER DRAWING
SCALE:	2:1	SHEET:	1/1