

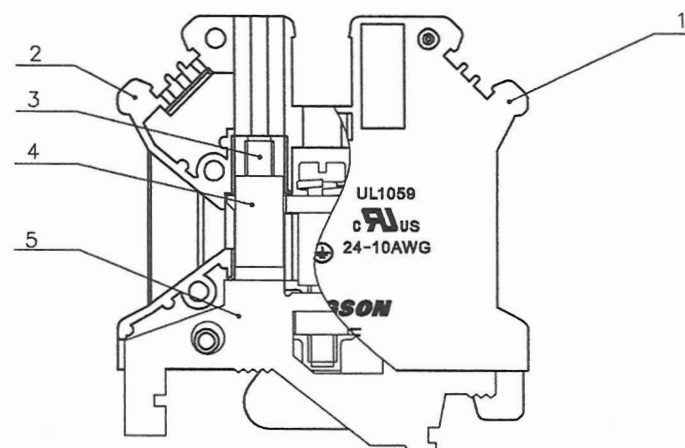


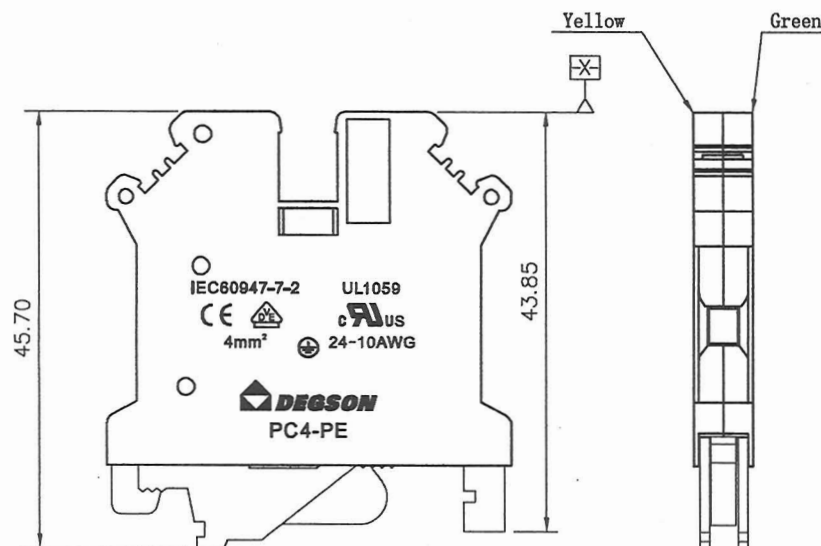

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

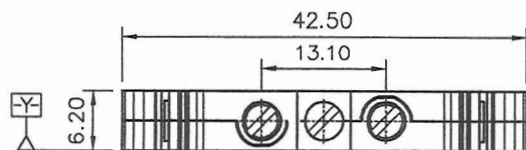

NOTES1:

UL Standard

- 1.Torque value : M3 , 4.43Lb.in
- 2.Wire range : 24~10AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 0.2~4.0mm²


NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.20mm, Poles : N=01P
- 3.Stripping length : 6~7mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						
TO	Over	TO	TO	Over	TO	Over	TO	Over	
6	6	10	10	30	60	100	150		0.1/10
6	10	24	30	60	100	150			<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

6.RoHS Compliance

5	PC4-PE-Ground contact		
4	PC4-Cage	Brass	M3/Ni Plated
3	PC4-Screw	Brass	M3/Ni Plated
2	PC4-PE-Housing	PA66	UL94V-0
1	PC4-PE-Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: Alan 10/18/16"		NAME: PC4-PE-01P-1Y-00A(H)		
	CHKD: ZYK 10/18/16"				
	DRFT: ExpsAny 11/14/05		TITLE: CUSTOMER DRAWING		REV TO
			DRAWING NO.: PC4-PE-C01		SHEET 1/1
	THIRD ANGLE PROJECTION		 DO NOT SCALE DRAWING		SCALE 1:1

文管中心
2016.10.2
(收) (无效)