


Conquer fuse block are available for 1/4" x 1-1/4" and 5x20mm fuses. The special phenolic resin base offers extremely high insulative values and unless otherwise noted include special dual-purpose connection tabs for either quick-connect, push-on terminal wires or for soldering use. A wide variety of sizes, shapes and mounting configurations fulfill all fuse application. Additionally, conquer designers are available to produce a fuse block to meet your specific applications.

CQ-121

RoHS


For ATQ Blade Type Fuse

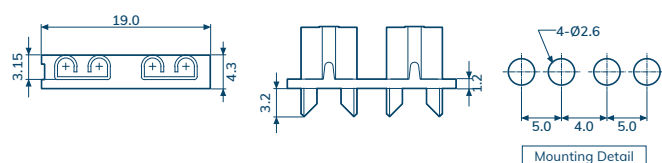

CQ-122

RoHS

For AST Mini Blade Type Fuse

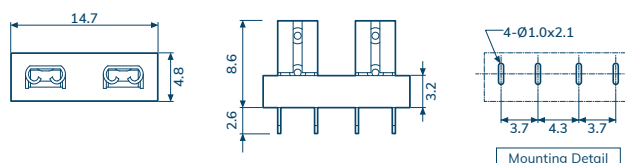


CQ-200C




RoHS

For 5x20mm Fuse

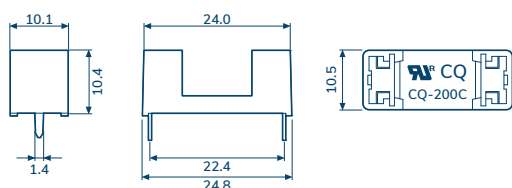

CQ-200CT


For 5x20mm Fuse

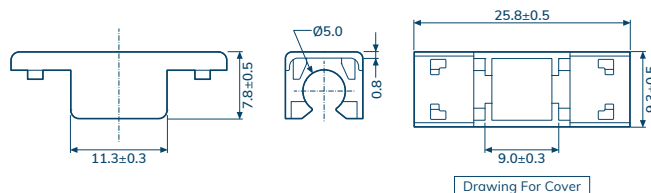

CQ-2001(S)

RoHS



For 5x20mm Fuse

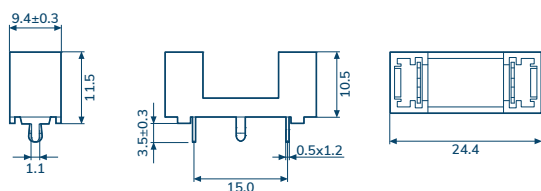

CQ-2002

RoHS

For 5x20mm Fuse

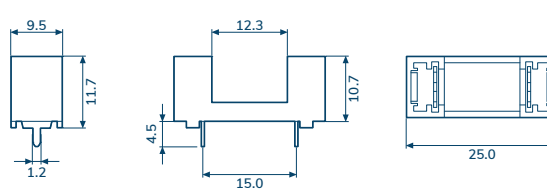

Item Number	CQ-121	CQ-122	CQ-200C	CQ-200CT	CQ-2001(S)	CQ-2002
Insertion & Extraction Force	1Kg. Min.	1Kg. Min.	1Kg. Min.	1Kg. Min.	1 Kg. Min.	1Kg. Min.
Dielectric Strength For 60 Sec	AC 2000V Min.	AC 500V Min.	AC 500V Min.	AC 500V Min.	AC 500V Min.	AC 500V Min.
Suitable Rated Current	15A/250V	20A/250V	6.3A/250V	6.3A/250V	6.3A/250V	6.3A/250V
Insulation Resistance At500VDC	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min	100MΩ Min
Temperature Rise	50°C Max	50°C Max	50°C Max	50°C Max	50°C Max	50°C Max
Voltage Drop	20mV Max.	20mV Max.	20mV Max.	20mV Max.	20mV Max.	20mV Max.