

D1RFRD006

active






REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES:

- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 5.0MM ,POLES: 02-24P
- 3.RATED VOLTAGE/CURRENT: UL1059 300V/15A
IEC 320V/20A
- 4.OPERATION TEMPERATURES: -40°C~+105°C
- 5.RATED IMPULSE VOLTAGE: 4.0KV
- 6.INSULATION RESISTANCE: 5000M Ω /DC1000V
- 7.WIRE RANGE: 22~14AWG,0.2~2.5MM²
- 8.UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM					
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER	
6	6	10	30	30	60	100	150	150
10	10	24	30	60	100	150	150	
± 0.10			± 0.15	± 0.25	± 0.20	± 0.30	± 0.50	± 0.70
						± 1.00		0.05/10

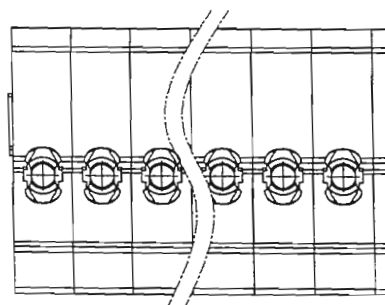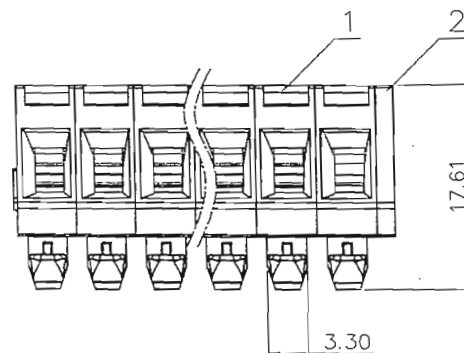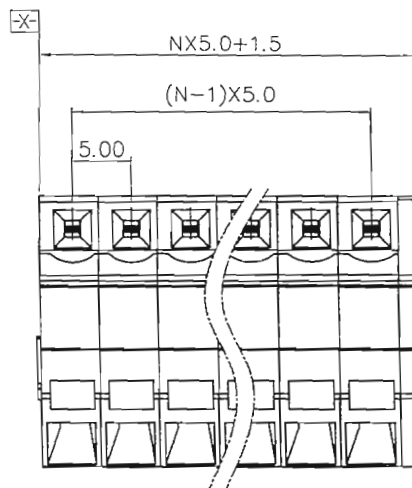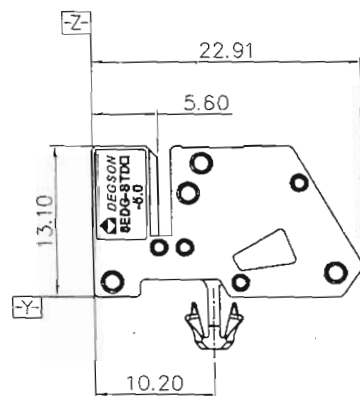

4	8EDG-STD-5.0-SPRING	X000005170(H)	XX	STAINLESS STEEL	
3	8EDG-STD-5.0 CLAMP	1380B00C10(H)	XX	COPPER	TIN PLATED
2	8EDG-STD-5.0 COVER	1380C4101A(H)	1	PA66	UL94V-0
1	8EDG-STDC-5.0 HOUSING	1383A4101A(H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)		MATERIAL:		FINISH:		PART NO.:		NAME:		8EDG-STDC-5.0-XXP-11-01A(H)	
	TOLERANCES EXCEPT AS NOTED		.X ±		.XX ±		.XXX ±		.X ±		.XX ±	
	ANGLES ± 1°		APPD: Jean 09/30/14		CHKB: Aaron 11/22/14		DRFT: GYZ 08/14/14		TITLE: ASSEMBLY DRAWING		REV TO	
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SCALE		N/A		SHEET		1/1	