

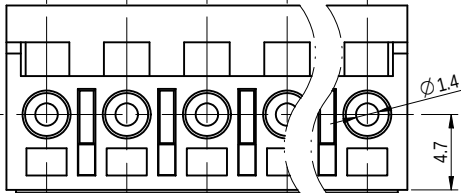

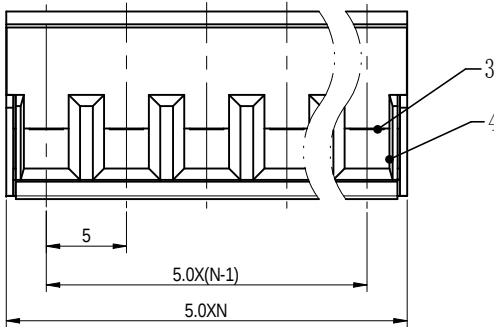
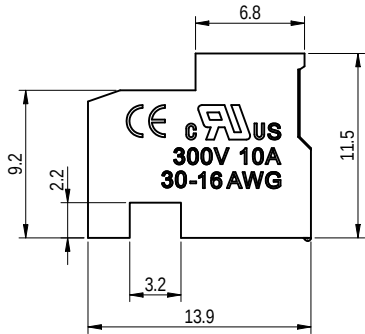


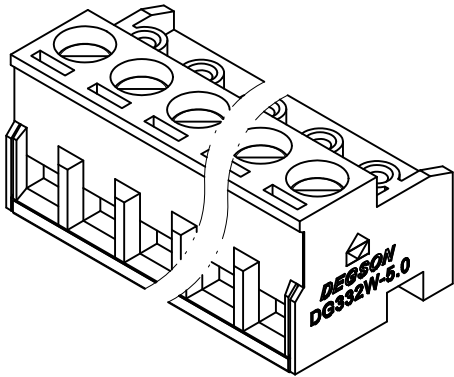

公差/General tolerances (mm)															0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500		
3	6	10	18	30	50	80	120	180	250	315	400	500			
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		

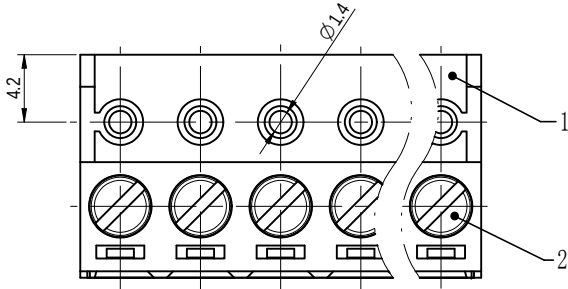

Note:
The A&Z(H) in the name means: A(H) and Z(H).

4	Cage	Copper alloy	M2.5/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Screw	Steel	M2.5/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/10	/	300/10
IEC 标准/IEC Standard:		III/3	III/2	II/2
过压类别/Ovenvoltage Category/污染等级/Pollution Degree		/	250/12	/
额定电压/电压/Rated Voltage(V)/Current(A)		/	250/12	/
工频耐压/Withstanding voltage(V/1Min)		/	AC2000	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2.5: 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		30~16/0.2~1.5		
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~12P		
剥线长度/Stripping length(mm)		5~6.5		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL:		SURFACE/COLOR:	
MAT NO./REV:		MAT STATUS: 批量	
NAME		DG332W-5.0-XXP-1Y-00A&Z(H)	
APPD: 兰泰华	2022.08.18	DRAWING NO.	200103642
CHKD: 陈超	2022.08.18	TYPE	CUSTOMER DRAWING
DFT: 黄徐涛	2022.08.18	DRAWING STATUS	已发布
REV	ECN	SCALE	1:1
00		SHEET	1/1

00		DESCRIPTION	黄徐涛	2022.08.18
REV	ECN	DFT	DATE	