

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、发明专利、外观设计、软件著作权、集成电路布图设计专有权、商标权、专利权等权利外，本公司保留其他一切权利。未经许可，不得复制或传播。

FOR-1755 Rev.1.7

2







3

4

5

6

PCB LAYOUT

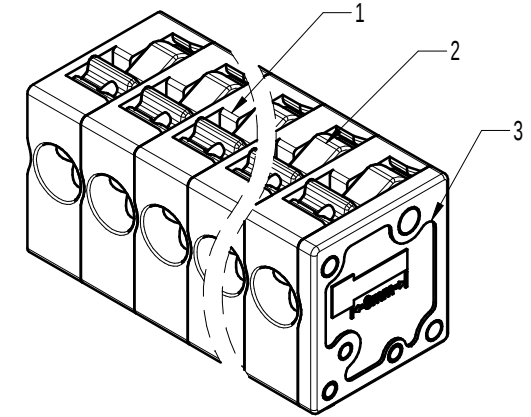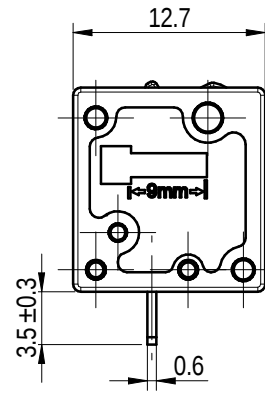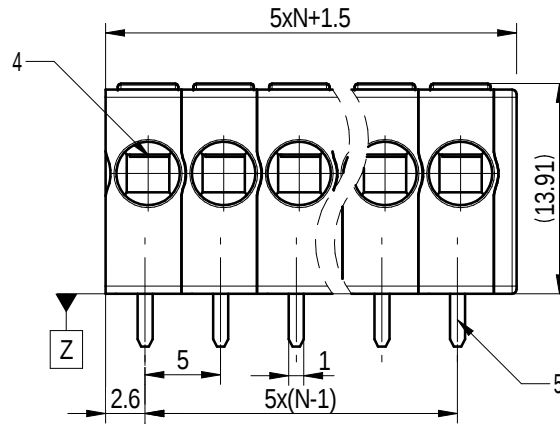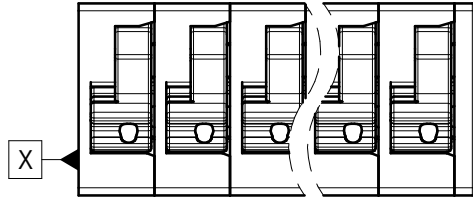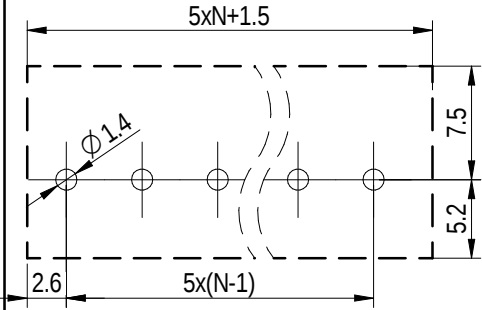

未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

UL 标准/UL Standard:				B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)				300/15	/	300/10
IEC 标准/IEC Standard:				III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree				320/20	400/20	630/20
额定电压/电流/Rated Voltage(V)/Current(A)				4	4	4
额定脉冲电压(KV)/Rate Impulse Voltage(KV)				18~14 / 0.75~2.5		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)				5/N=02~12P		
间距/Pitch(mm)/线数范围/Poles				9~10		
剥线长度/Stripping length(mm)				-40~+110		
使用温度范围/Operating temperature(°C)				Yes		
符合RoHS环保要求/Conform to RoHS				Green		
标准颜色编号/Standard color number: PANTONE / RAL						

5	Pin_header	Copper	Sn_plated
4	Spring	Stainless Steel	/
3	Cover	Nylon	UL94V-0
2	Button	PPS	UL94V-0
1	Housing	Nylon	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES



00			曹心一	2023.02.09
REV	ECN	DESCRIPTION	DRFT	DATE

		MATERIAL:		SURFACE/COLOR:	
APPD: David		MAT NO./REV:		MAT STATUS:	
CHKD: David		NAME		DGPS2. 5R-5. 0-XXP-1Y-00Z (H)	
DRFT: 曹心一		DRAWING NO.		DRAWING STATUS	
A4		200123562		已发布	
		TYPE		SCALE	
		CUSTOMER DRAWING		2:1	
				SHEET	
				1/1	