



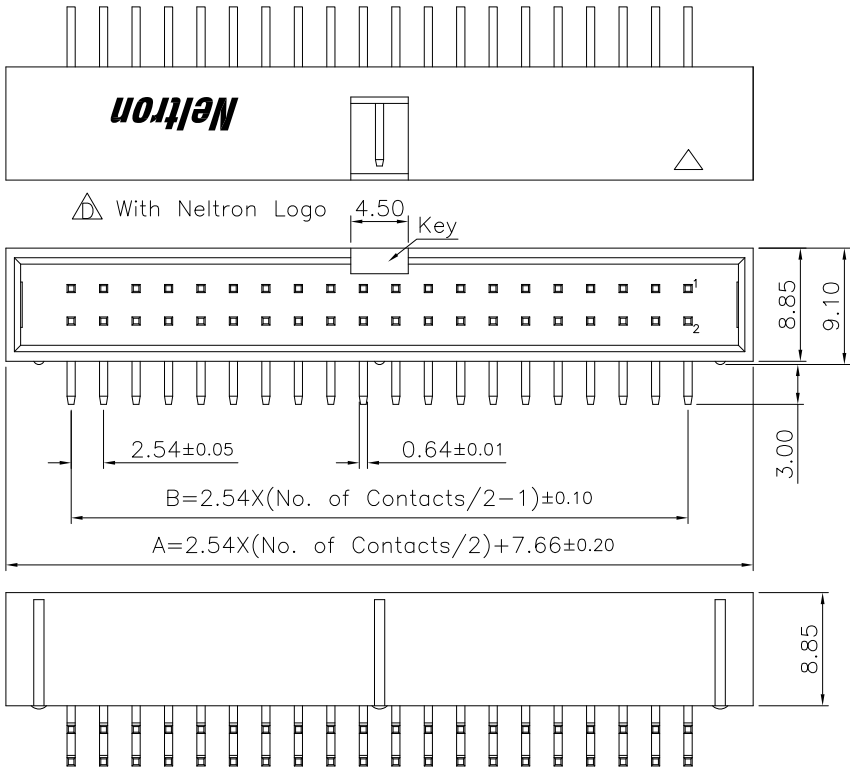

Specifications:

- Current Rating: 3.0A AC/DC
- Voltage Rating: 250 AC/DC
- Contact Resistance: 20m ohm. max.
- Insulation Resistance: 1,000M ohm. min.
- Withstanding Voltage: 600V AC For One Minute
- Operating Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Material and Finish
- Insulator: PBT (UL94V-0)
- Insulator Color: Black
- Contact: Brass
- Plating: Gold/Tin Plated

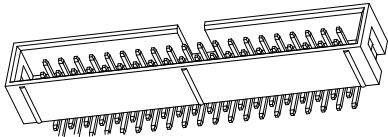

How to Order


2316R-XXX-XX-XX

- Blank Without Logo
- P: Print Neltron Logo
- Blank 6~40 Pin With One Key
- 1K: 50~64 Pin With One Key
- 3K: 50~64 Pin With Three Key
- G: Gold Plated
- T: Tin Plated
- No. of Positions
- Right Angle

Notes:

- No. Of Positions 50~64 With Three Key
- All Other Pin With One Key

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B	Note
6	15.28	5.08	16	27.98	17.78	34	50.84	40.64	
8	17.82	7.62	20	33.06	22.86	40	58.46	48.26	
10	20.36	10.16	24	38.14	27.94	50	71.16	60.96	1K&3K
12	22.90	12.70	26	40.68	30.48	60	83.86	73.66	1K&3K
14	25.44	15.24	30	45.76	35.56	64	88.94	78.74	1K&3K

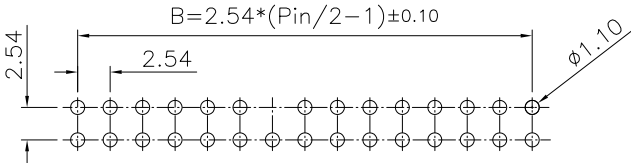

active

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	NeltronConnectors Neltron Industrial Co., Ltd.	
E				Cel king	.X=±0.20 .XX=±0.15		
D	24-AUG-2020	△ Modify Part No.	Jamie	CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION:	SIZE
C	19-MAR-2020	△ (P0001)(PC0621)	Lisy		SCALE: 1:1	2.54mm Box Header R/A Type	A4
B	06-OCT-2009	ECN-TW091001	Allen	APPROVAL:	SHEET: 1/1	PART NO:	
A	04-AUG-2005		Cel king		PROJECTION:	2316R-XXX-XX-XX △ △	
REV	DATE	FILE	BY	Mike Wu			