

Specifications

Current Rating: 3.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. Max
 Insulation Resistance: 1000M ohm. Min
 Withstanding Voltage: 600V AC For one minute
 Operating Temperature Range : -40°C to +105°C
 Material:

△C/△B Plastic: Thermoplastic (UL94V-0)
 Standard Color: Black
 Contact: Copper Alloy
 Plating: Gold Plated

How To Order


2216R-XXG-XX-XX/△B/△C

- Blank 6~40 Pin With One Key
- 1K:50~64 Pin With One Key
- 3K:60~64 Pin With Three Key
- 01:Short Ejector
- 02:Long Ejector
- G:Gold Plated
- No. Of Contacts
- Right Angle

Notes:
 No. Of Positions 60~64 With Three Key
 All Other Pin With One Key

No. of Positions	Dim A	Dim B	No. of Positions	Dim A	Dim B	Note
10	32.20	10.16	34	62.68	40.64	
12	34.74	12.70	40	70.30	48.26	
14	37.28	15.24	50	83.00	60.96	1K
16	39.82	17.78	60	95.70	73.66	1K&3K
20	44.90	22.86	64	100.78	78.74	1K&3K
24	49.98	27.94				
26	52.52	30.48				
30	57.60	35.56				

	Dim C	Dim D
01	3.6	7.8
02	7.6	11.0

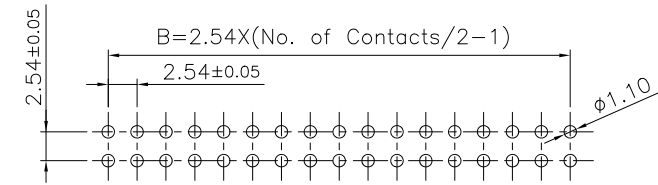

P.C.B Layout

RoHS Compliant

F				DRAWN: Jamie Wang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	Neltron Industrial Co., Ltd.	DESCRIPTION: 2.54mm Shrouded Header With Ejector Right Angle Type	SIZE A4
E								
D	29-Feb-2024	△D	Lucy Du	CHECKED: Jerry Chen	UNIT: MM	PART NO: 2216R-XXG-XX-XX △B/△C		
C	29-Aug-2023	Delete F5 Options	Lisy Liu		SCALE: 1:1			
B	28-Dec-2022	Add F5 Options	Lucy Du	APPROVAL: Mike Wu	SHEET: 1/1			
A	15-Aug-2018		Jamie Wang		PROJECTION:			
REV	DATE	FILE	BY					