


Specifications
 Current Rating:3.0A AC/DC
 Voltage Rating:500V AC/DC Δ
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1,000M ohm. Min.
 Withstanding Voltage:500V AC For One Minute Δ
 Operating Temperature Range:-25°C To +105°C Δ

Material and Plated
 Insulator:PBT (UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy

Δ Plated:Gold Plated/Tin Plated/SG:Selective Gold Plated
 SG15:Selective Gold Plated 15U"
 SG30:Selective Gold Plated 30U"

How To Order
 2211S-XXX

G:Gold Plated
 T:Tin Plated Δ
 SG:Selective Gold Plated
 SG15:Selective Gold Plated 15U"
 SG30:Selective Gold Plated 30U"
 No. Of Contacts
 S:Straight Type

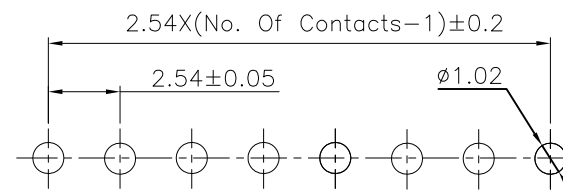

PCB Layout

RoHS Compliant

| | | | | | | | | |
|-----|-------------|----------------|------------|-----------------------|--------------------|-------------------------------------|--|-------------------|
| F | | | | DRAWN: | GENERAL TOLERANCE: | Neltron Industrial Co., Ltd. | DESCRIPTION: 2.54mm Pin Header Single Row Straight Type | SIZE A4 |
| E | | | Romina Wu | .X=±0.20 .XX=±0.15 | | | | |
| D | | | CHECKED: | | | | | |
| C | 28-Jun-2019 | add Tin Plated | Jerry Chen | Jerry Chen | UNIT: MM | | | |
| B | 14-Jan-2019 | 更新圖面 | Romina Wu | APPROVAL: | SCALE: 1:1 | PART NO: | | |
| A | 25-Oct-2018 | | Romina Wu | Mike Wu | SHEET: 1 / 1 | 2211S-XXX | | |
| REV | DATE | FILE | BY | | PROJECTION: | | | |

