
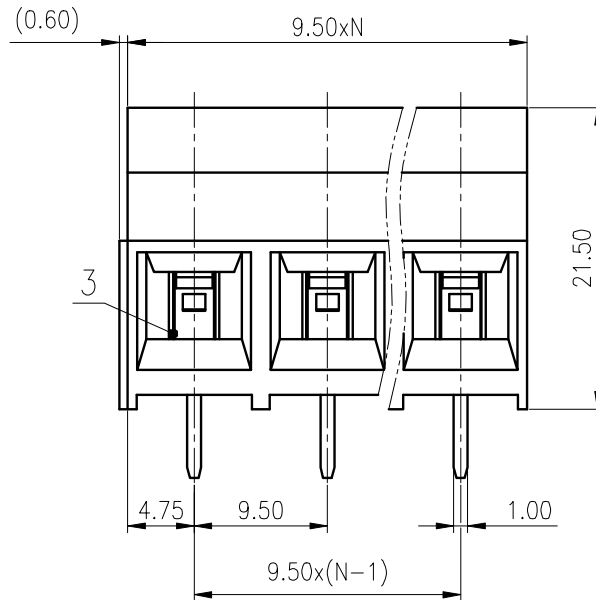
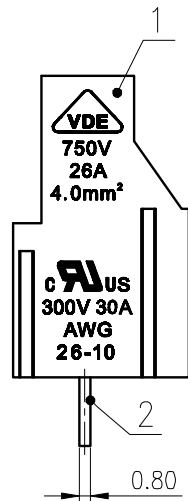
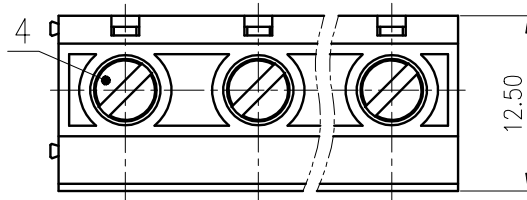


PCB LAYOUT

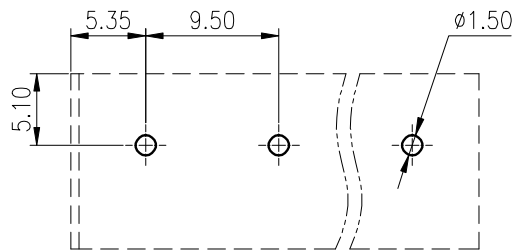


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

4	Screw	Steel	M3/Zn Plated
3	Cage	Copper alloy	M3/Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/30	300/30	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree			Ⅲ/2	
额定电压/电流/Rated Voltage(V)/Current(A)			750/26	
工频耐压/Withstanding voltage(V/1Min)			AC3000	
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M3, 0.5/4.43	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)			1.5~4.0mm²/26~10	
间距/Pitch(mm)/线数范围/Poles			9.50/N=02~24P	
剥线长度/Stripping length(mm)			8~9	
使用温度范围/Operating temperature(°C)			-40~+105	
符合RoHS环保要求/Conform to RoHS			Yes	

MATERIAL: / /		SURFACE: /	
MAT NO.: / /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: LanCH 2020.03.21		NAME: DG950-9.5-XXP-1Y-00A(H)	
CHKD: YuJZ 2020.03.21			
DRFT: Jay.z 2018.10.22			
DRAWING NO.: DG950-9.5-C01		REV	T1
	SIZE: A4 	TYPE: CUSTOMER DRAWING	SCALE: 2:1
		SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------