
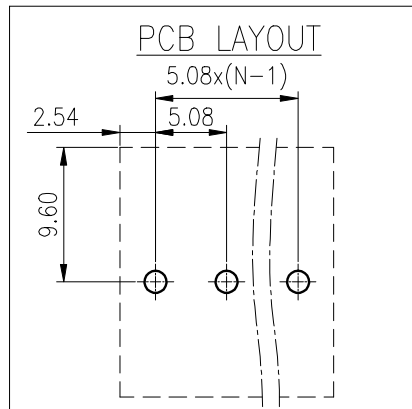
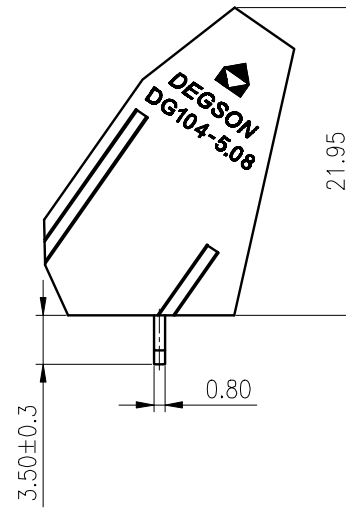
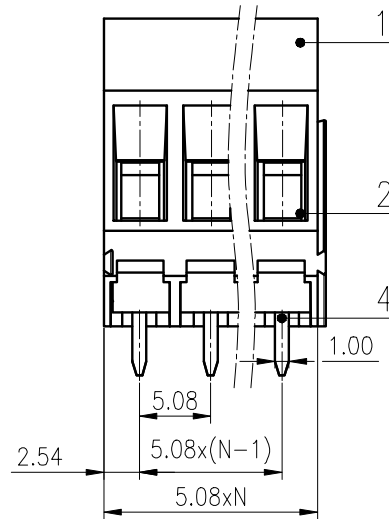
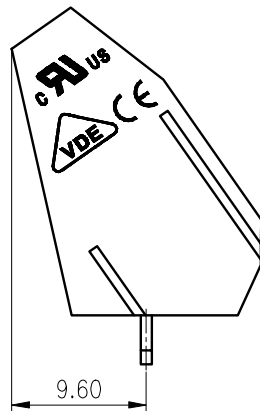


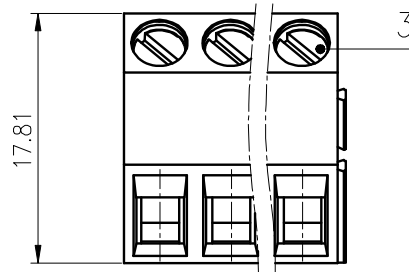

| 公差/General tolerances(mm) |       |       |       |       |       |       |       |       |       |       |       |       | 0.1/10 |
|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 0                         | >3    | >6    | >10   | >18   | >30   | >50   | >80   | >120  | >180  | >250  | >315  | >400  |        |
| ~3                        | ~6    | ~10   | ~18   | ~30   | ~50   | ~80   | ~120  | ~180  | ~250  | ~315  | ~400  | ~500  | ±2'    |
| ±0.12                     | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50  |

|   |            |              |              |
|---|------------|--------------|--------------|
| 4 | Pin header | Copper alloy | Sn plated    |
| 3 | Screw      | Steel        | M3/Zn plated |
| 2 | Cage       | Copper alloy | M3/Ni plated |
| 1 | Housing    | PA66         | UL94V-0      |

| ITEM | NAME OF PART | MATERIAL | NOTES |
|------|--------------|----------|-------|
|------|--------------|----------|-------|

UL 标准/UL Standard: B C D

额定电压/电压/Rated Voltage(V)/Current(A) 300/15 / 300/10

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree III/3 III/2 II/2

额定电压/电压/Rated Voltage(V)/Current(A) / 250/24 /

工频耐压/Withstanding voltage(V/Min) / AC2000 /

螺丝扭矩/Torque Tightening(N·m/Lb.in) M3, 0.5/4.43

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm<sup>2</sup>/AWG) 0.5~2.5/24~14

间距/Pitch(mm)/线数范围/Poles 5.08/N=02~24P

剥线长度/Stripping length(mm) 6

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.06.22 NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

CHKD: Mao J 2020.06.22 DG104-5.08-XXP-1Y-00A(H)

DRFT: Z YH 2008.08.08 DRAWING NO.: DG104-5.08-C01 REV TO

SIZE: A4 TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

REV ECN DESCRIPTION

DRFT DATE