

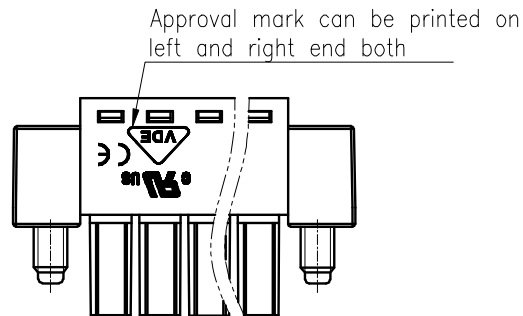






未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

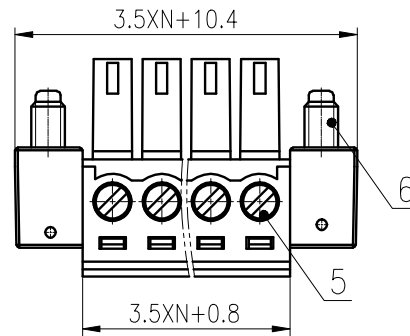

6	Screw 2	Steel	M2.5/Zn Plated
5	Screw 1	Steel	M2/Zn Plated
4	Cage	Copper Alloy	M2/Ni Plated
3	Clamp	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/8	/
IEC 标准/IEC Standard:			
过电压类别/Overvoltage Category/污染等级/Pollution Degree			II/2
额定电压/电压/Rated Voltage(V)/Current(A)			250/7
额定脉冲电压(kV)/Rate Impulse Voltage(kV)			2.5
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M2, 0.2/1.77
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)			0.5~1.5/28~16
间距/Pitch(mm)/线数范围/Poles			3.5/N=02~24P
剥线长度/Stripping length(mm)			6~7
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL: /	SURFACE: /
MAT NO.: /	STATUS: /
APPD: LanCH 2020.05.27	CHKD: YuJZ 2020.05.27
DRFT: FRZ 2016.01.26	NAME: 15EDGKM-3.5-XXP-1Y-00AH
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 2:1	SHEET 1/1

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
----------	------------------------	------------	-----------