

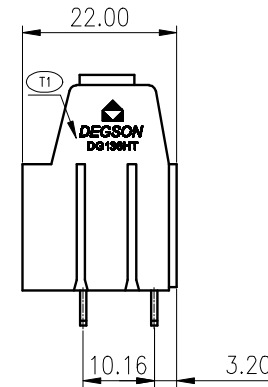
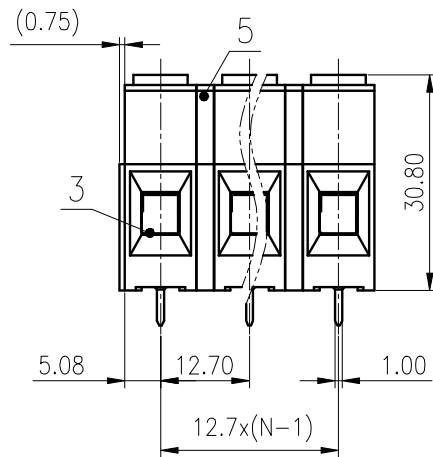


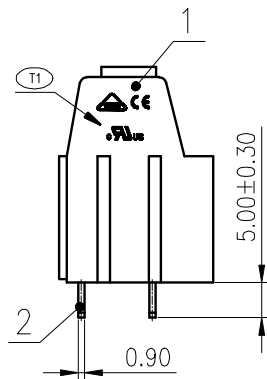


未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

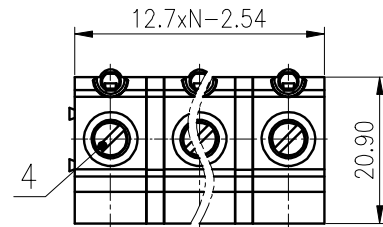

PCB LAYOUT

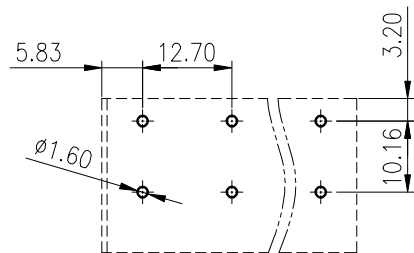

5	Clapboard	PA66	UL94V-0
4	Screw	Copper alloy	M4/Ni Plated
3	Cage	Copper alloy	M4/Ni Plated
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard: B C D
额定电压/电流/Rated Voltage(V)/Current(A) 600/60 600/60 /

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree III/2

额定电压/电流/Rated Voltage(V)/Current(A) 1000/65

工频耐压/Withstanding voltage(V/1Min) AC3500

螺丝扭矩/Torque Tightening(N·m/Lb.in) M4, 1.2/10.53

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 2.5~16/20~6

间距/Pitch(mm)/线数范围/Poles 12.70/N=2~12P

剥线长度/Stripping length(mm) 10~11

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: /	SURFACE: /
MAT NO.: /	STATUS: /
APPD: LanChH 2020.05.16	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: YuJZh 2020.05.16	DRG136HT-12.70-XXP-1Y-00A(H)
DRFT: CMZ 2018.01.18	DRAWING NO.: DG136HT-12.70-C01
TYPE: CUSTOMER DRAWING	SCALE: 1:1
SIZE: A4	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1
-----	-----	-------------	------	------	----------	------------------------	------------	-----------