




REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES:

- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 5.0MM ,POLES: 02-24P
- 3.RATED VOLTAGE/CURRENT: UL1059 300V/15A
IEC 320V/20A
- 4.OPERATION TEMPERATURES: -40℃~+105℃
- 5.RATED IMPULSE VOLTAGE: 4.0KV
- 6.INSULATION RESISTANCE: 5000MΩ/DC1000V
- 7.WIRE RANGE: 22~14AWG,0.2-2.5MM²
- 8.UNDIMENSIONED TOLERANCES:

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	
6	6 TO 10	10 TO 24	30 TO 60	60 TO 100	100 TO 150	OVER 150	□
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.000.05/10

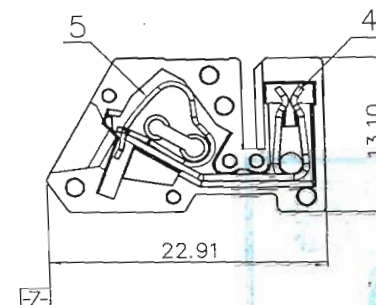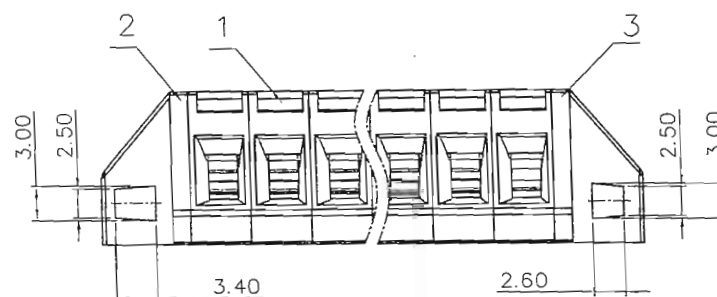

2	8EDG-STD-5.0 COVER1	1381C4101A(H)	1	PA66	UL94V-0
1	8EDG-STD-5.0 HOUSING	1380A4101A(H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	MATERIAL:	NINGBO DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED	FINISH:	DEGSON®		
	.X ± .XX ± .XXX ±	PART NO.:	NAME:		
	.X* ± .XX* ± .XXX* ±	APPRO: Jean 09/30/14	8EDG-STD-5.0-XXP-11-01A(H)		
ANGLES ± 1°		CHKG: Aaron 12/2/14	TITLE: ASSEMBLY DRAWING		REV TO
THIRD ANGLE PROJECTION		DRFT: GYZ 08/14/14"	DRAWING NO.: 8EDG-STD-5.0-E01		DO NOT SCALE DRAWING
			SCALE	N/A	SHEET 1/1

5	8EDG-STD-5.0-SPRING	X000005170(H)	XX	Stainless Steel
4	8EDG-STD-5.0 CLAMP	1380B00010(H)	XX	COPPER TIN PLATED
3	8EDG-STD-5.0 COVER2	1381C4101C(H)	1	PA66 UL94V-0