

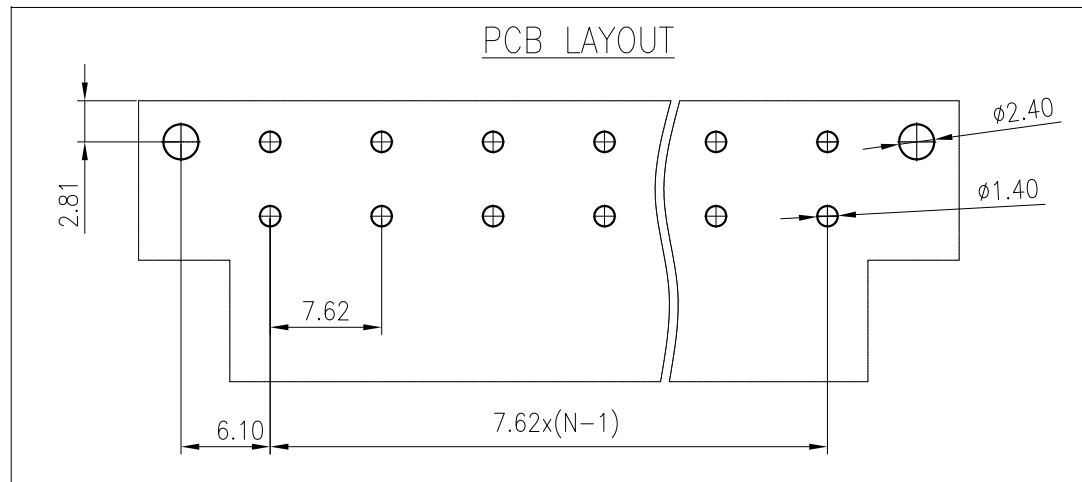
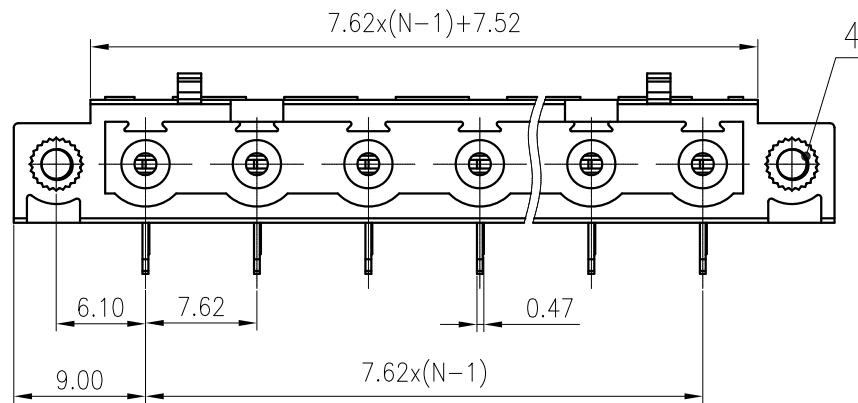
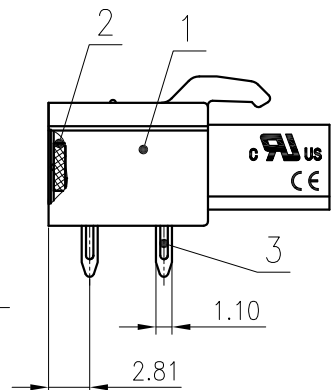



active

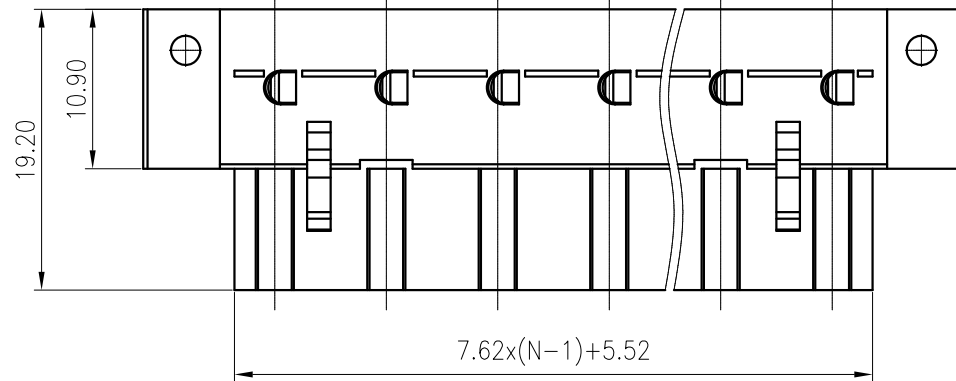

未注公差/General tolerances(mm)													0.1/10 ±2°
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
UL 标准/UL Standard:													B
额定电压/电流/Rated Voltage(V)/Current(A)													C
EC 标准/IEC Standard:													D
过压类别/Overvoltage Category/污染等级/Pollution Degree													III/3
额定电压/电流/Rated Voltage(V)/Current(A)													400/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)													4
间距/Pitch(mm)/线数范围/Poles													7.62/N=02~16P
使用温度范围/Operating temperature(°C)													-40~+105
符合RoHS环保要求/Conform to RoHS													Yes
标准颜色编号/Standard color number:													/
PANTONE / RAL													/

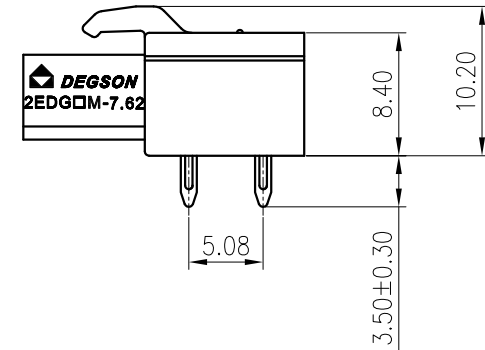

4	Screw Cap	Copper alloy	
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

MATERIAL: /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: LiGL 2020.06.17		NAME:	
CHKD: MaoJ 2020.06.17		2EDGAM-7.62-XXP-14-00A(H)	
DRFT: WangY2 2020.06.17		DRAWING NO.: 2EDGAM-7.62-C01	
		REV	T1
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 2:1	SHEET 1/1