
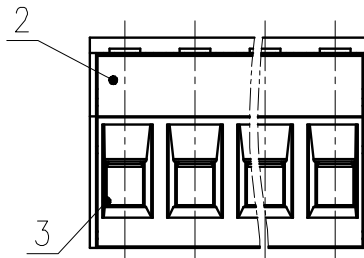


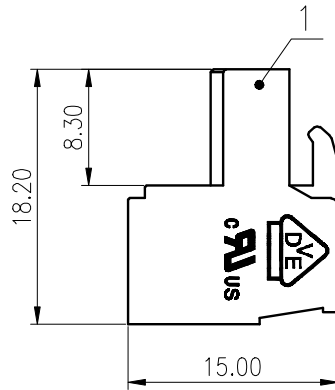
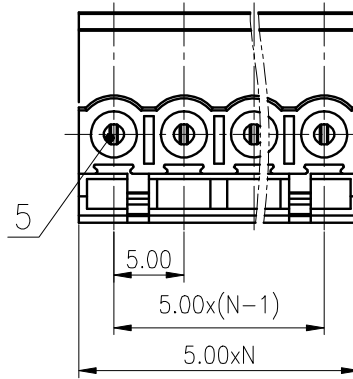


02P



未注公差/General tolerances(mm)

0 ~3	>3 ~6	>6 ~10	>10 ~18	>18 ~30	>30 ~50	>50 ~80	>80 ~120	>120 ~180	>180 ~250	>250 ~315	>315 ~400	>400 ~500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

5	Clamp	Copper Alloy	Sn Plated
4	Screw	Steel	M3/Zn Plated
3	Cage	Copper Alloy	M3/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard:

额定电压/电压/Rated Voltage(V)/Current(A)

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等

级/Pollution Degree

额定电压/电压/Rated Voltage(V)/Current(A)

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

螺丝扭矩/Torque Tightening(N·m/Lb.in)

线径范围(硬线和软线)/Wire Range(rigid and

flexible)(mm²/AWG)

间距/Pitch(mm)/线数范围/Poles

剥线长度/Stripping length(mm)

使用温度范围/Operating temperature(°C)

符合RoHS环保要求/Conform to RoHS

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: LanChH 2020.06.23

CHKD: YuJZh 2020.06.23

DRFT: BaYH 2020.06.23

NAME: 2EDGKF-5.0-XXP-1Y-1000A(H)

DRAWING NO.: 10002080

REV TO

TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1

active

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
-----	-----	-------------	------	------	----------	------------------------	------------	-----------