

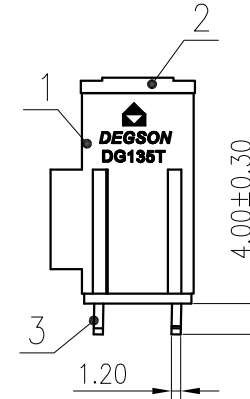


未注公差/General tolerances(mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

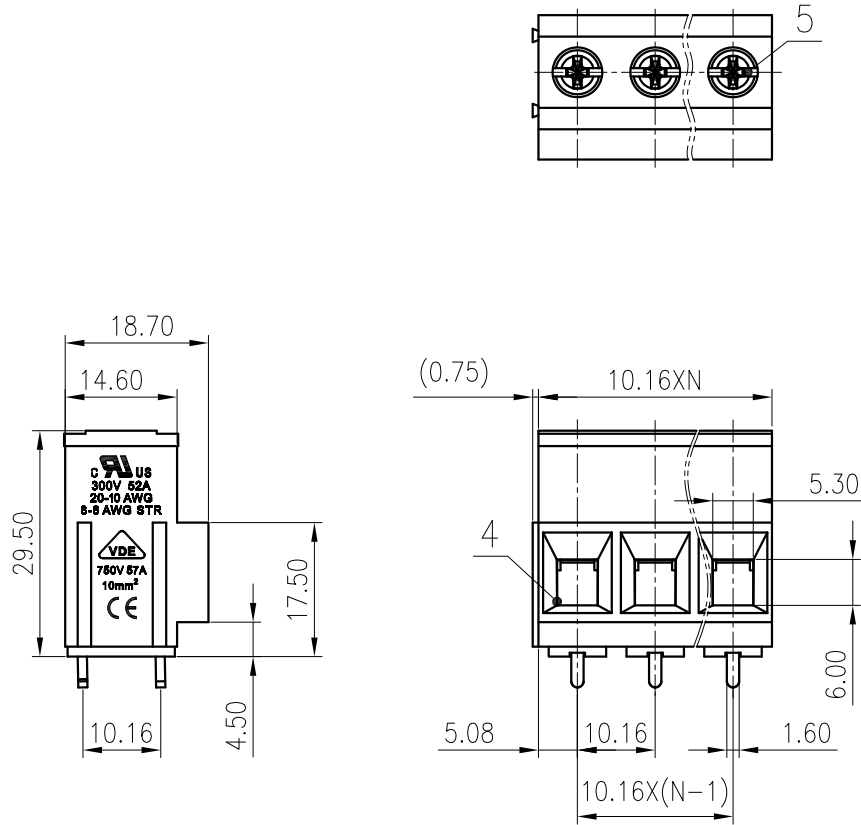

5	Screw	Steel	M4/Zn Plated
4	Cage	Copper alloy	M4/Ni Plated
3	Pin header	Copper	Sn Plated
2	Cover	PBT	UL94V-0
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		300/52	300/52
IEC 标准/IEC Standard:		D	600/5
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/2	
额定电压/电压/Rated Voltage(V)/Current(A)		750/57	
工频耐压/Withstanding voltage		AC3000V/1Min	
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.2/10.53	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		4~10/20~6	
间距/Pitch(mm)/线数范围/Poles		10.16/N=2~12P	
剥线长度/Stripping length(mm)		11~12	
使用温度范围/Operating temperature(°C)		-30~+120	
符合RoHS环保要求/Conform to RoHS		Yes	

PCB LAYOUT

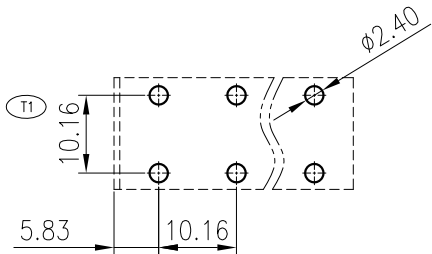

REV	ECN	DESCRIPTION	DRFT	DATE
T1		1xCorrect PCB board size	Ba YH	2022.04.11

MATERIAL: /		SURFACE: /	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: LanChH 2022.04.11		NAME: DG135T-10.16-XXP-1Y-00A(H)	
CHKD: ChenZh 2022.04.11			
DRFT: BaYH 2020.05.16		DRAWING NO.: 10002031	
 SIZE: A4 		TYPE: CUSTOMER DRAWING	SCALE: 1:1
		SHEET	1/1