
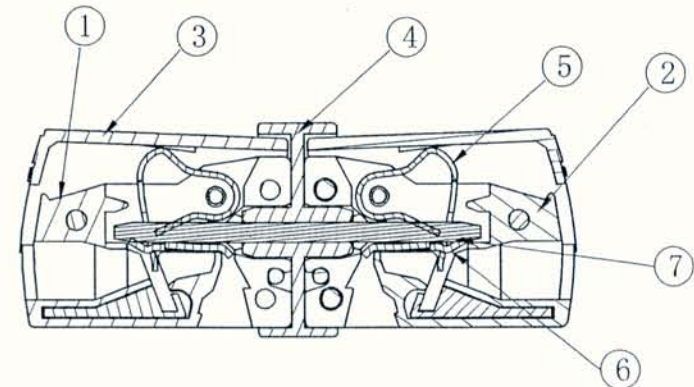
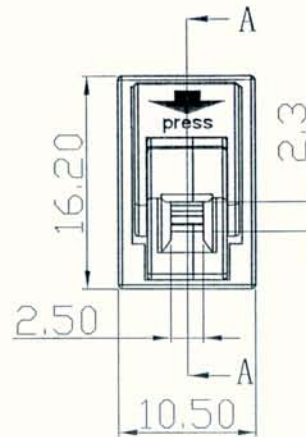
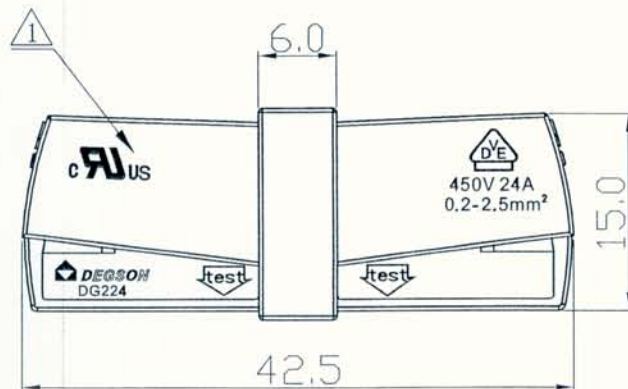


REVISION RECORD					
REV	ECN	DESCRIPTION	DRFT	DATE	
1	10-0186	增加UL刻字	David.G	05/28/10	


Notes:

1. Rated voltage/current:UL 300V/22A
IEC 450V/24A
2. Operation temperatures:-40° C~+105° C
3. Insulation Resistance:5M Ω /DC500V
4. Withstanding voltage:AC2500V/1Min
5. Wire Range:22~12AWG, 0.2~2.5mm²
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	□
±0.10	±0.15	±0.25	±0.3	±0.4	±0.6	±0.8	±1	0.05/10

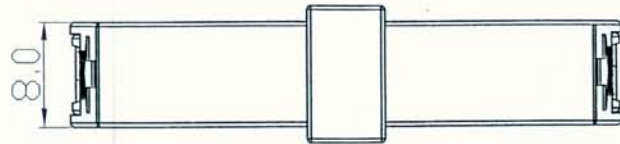

SECTION A-A

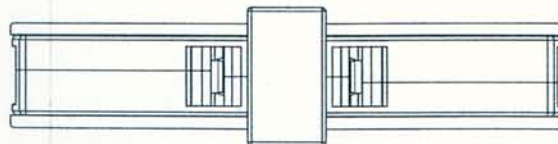

3	DG222-8.0 Cover	3042C0Y01A(H)	2	PA66	UL94V-0
2	DG224-8.0 Housing	3089A0Y01A(H)	2	PA66	UL94V-0
1	DG222-8.0 Housing1	3042A0Y01A(H)	2	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

MM (INCH)		DATE 11/26/07	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD <i>W</i>	DATE 11/26/07	NAME DG224-8.0-01P-1Y-00A(H)
		HFD	DATE	
MM		APPLD <i>Ref</i>	DATE 7/5/10	
.0 ±		MATERIAL		
.00 ±		GE :		DRAWING NO. DG224-8.0-E01
.000 ±		FINISH		
THIRD ANGLE PROJECTION		SCALE : 1:1		REV T1 05/28/10
DO NOT SCALE DRAWING			SHEET 1 OF 1	

7	DG224 Current carrier	3042B00020(H)	1	Copper	SnCe
6	DG222 Current carrier	3042B00010(H)	2	Copper	SnCe
5	DG222 Spring	X000003780(H)	2	stainless steel	
4	DG224-8.0 Housing1	3042A0Y01D(H)	1	PA66	UL94V-0