



active



3.5

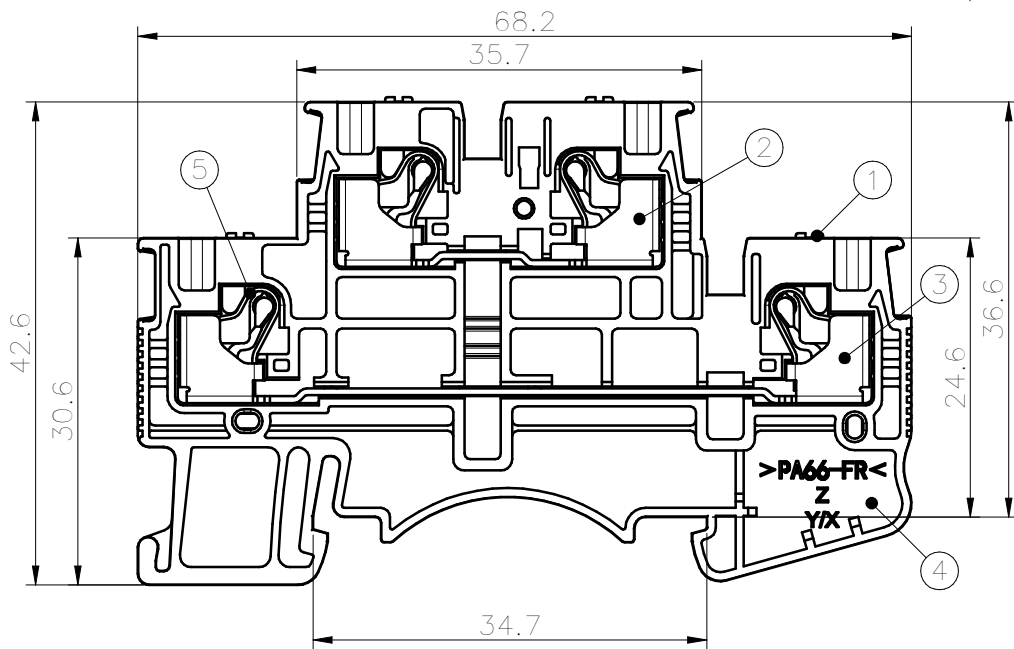


VIEW A

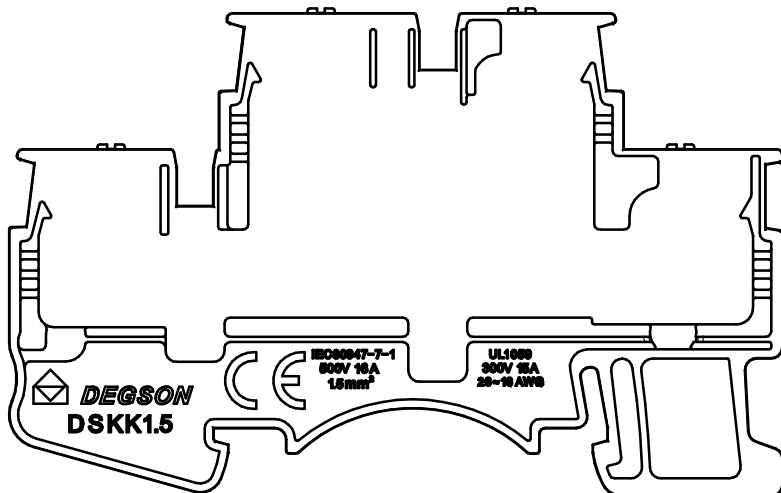

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

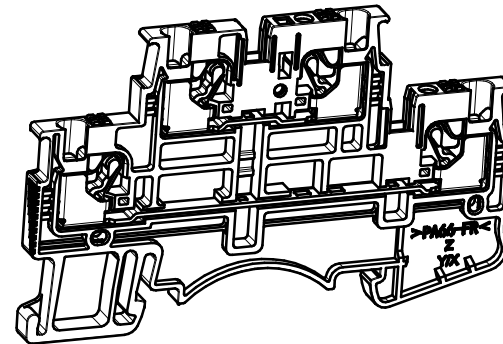please refer to the 3D model,
for those unmarked dimensions

5	Spring	Stainless steel	/
4	Housing	PA66	UL94V-0
3	Long_Current_carrier	Copper	Sn Plated
2	short_Current_carrier	Copper	Sn Plated
1	Button	PA66+GF%	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	300/15	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/16	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	26~16, 14SOL / 0.14~1.5conductor cross section flexible, with ferrule with plastic sleeve max.0.5mm² (stripping length: 8mm)		
间距/Pitch(mm)/线数范围/Poles	3.50/N=01P		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		



MATERIAL:

SURFACE:

MAT NO./REV: 11040000196-1 / 00

MAT STATUS: 新物料

APPD: 李根芳 2021.06.03
CHKD: 马恩开 2021.06.02
DRFT: 马恩开 2021.06.02

NAME

DSKK1. 5-01P-11-00A(H)

DRAWING NO.

TYPE

DRAWING STATUS

SCALE

SHEET

000008655

CUSTOMER DRAWING

已发布

1.5:1

1/1

00	ECN	2021.06.02初版发行	马恩开	2021.06.02
REV	ECN	DESCRIPTION	DRFT	DATE