

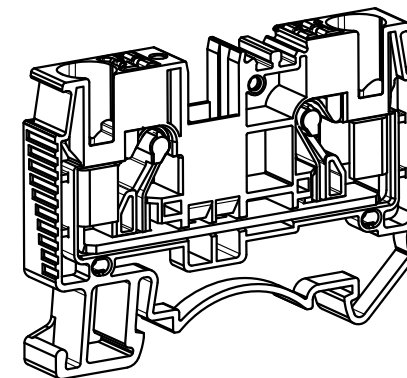


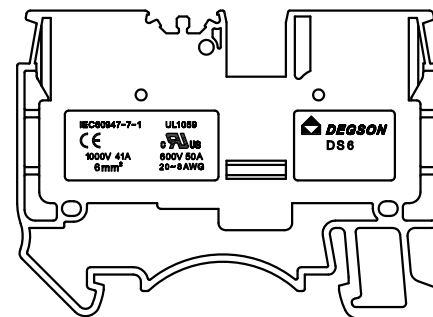

未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2'

Please refer to the 3D model,
for these unmarked dimensions.

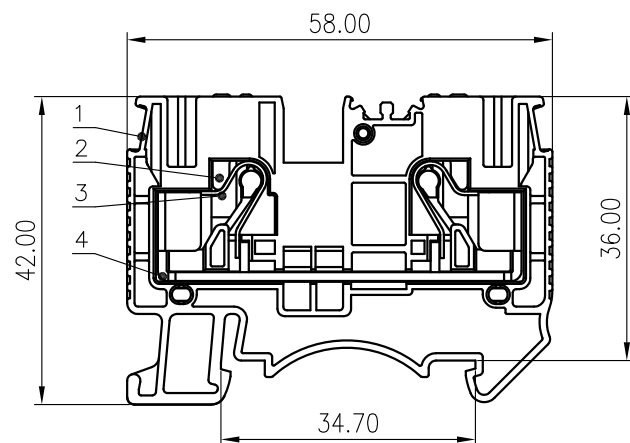

4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	
2	Button	PA66 (T1)	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		600/50	600/50
IEC 标准/IEC Standard:		D	
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电压/Rated Voltage(V)/Current(A)		1000/41	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8.0	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		/	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.5~6&10(sol)/20~8	
间距/Pitch(mm)/线数范围/Poles		8.2/01P	
剥线长度/Stripping length(mm)		10~12	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:		/	
PANTONE / RAL		/	

MATERIAL:		SURFACE:	
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS: /			
APPD: Li GL 2020.08.17		NAME: DS6-01P-1Y-00A(H)	
CHKD: Mao J 2020.08.17			
DRFT: ding 2016.04.16		DRAWING NO.: DS6-C01	
 SIZE: A4		REV T1	
 mm (inch)		TYPE: CUSTOMER DRAWING	
		SCALE: 1:1	
		SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
T1	/	Modify the button material description	Feng X	2020.08.17