



active

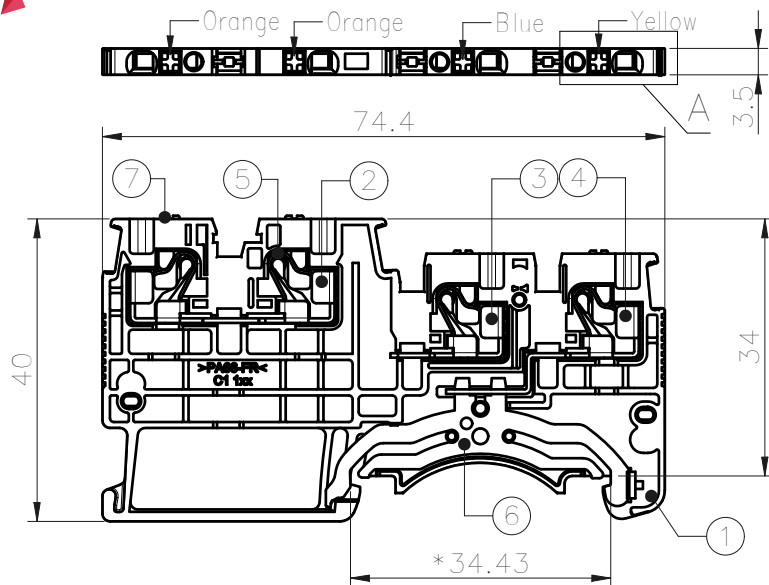


Please refer to the 3D model,
for those unmarked dimensions

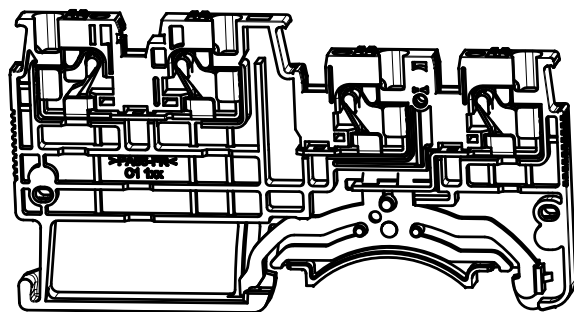


A
2:1

those surface are printed
yellow and green



未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

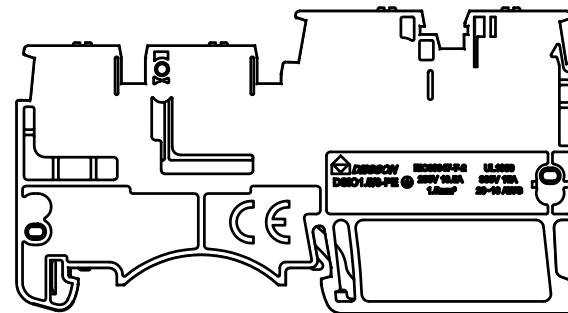

7	Button	PA66+GF%	UL94V-0
6	PE	Copper	Sn Plated
5	Spring	Stainless steel	/
4	Current_carrier2	Copper	Sn Plated
3	Current_carrier2	Copper	Sn Plated
2	Current_carrier1	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300V/15	150/15	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/13.5	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26~16,14SOL 0.14~1.5conductor cross Section flexible,with ferrule With plastic sleeve max.0.5mm ² (stripping length: 8mm)		
间距/Pitch(mm)/线数范围/Poles	3.5/N=01P		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		



MATERIAL:	SURFACE:
MAT NO./REV: 11040000235-1 / 00	MAT STATUS: 设计放行

APPD:	NAME
CHKD:	DSI01.5/3-PE-01P-11-00A(H)

DRFT:	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
⊕ ⊖ A4	200009788			2:1	1/1

00	ECN				
REV	ECN	DESCRIPTION	DRFT	DATE	