
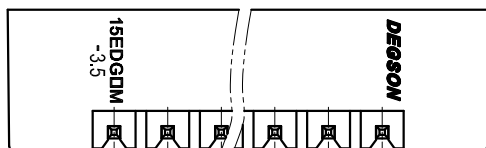
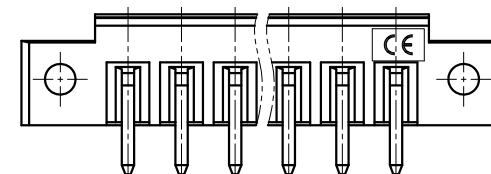

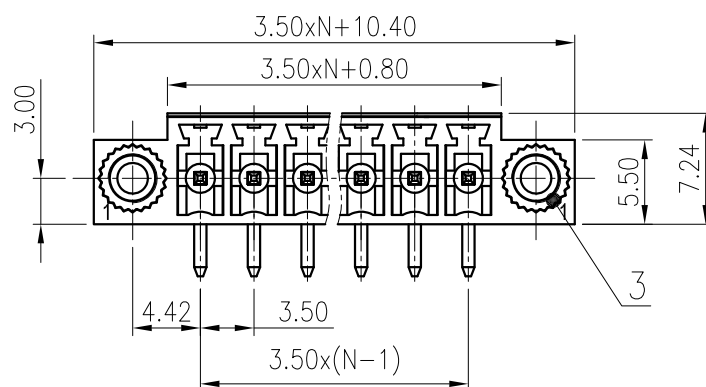

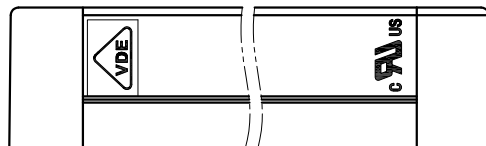


未注公差/General tolerances(mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50




文 管 中 心
研 发 专 用
2020. 06. 01
(仅限内部使用, 对外无效)

3	Screw cap	Copper alloy	/
2	Pin	Copper alloy	Sn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	300/8
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	2.5
间距/Pitch(mm)/线数范围/Poles		3.50/N=02~22P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:		SURFACE:			
MAT NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					
APPD:Lan ChH 2020.06.01		NAME: 15EDGRM-3.5-XXP-1Y-00A(H)			
CHKD:Yu JZh 2020.06.01					
DRFT: Yz 2015.10.13		DRAWING NO.: 15EDGRM-3.5-C01		REV	T1
	SIZE: A4		TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1

PCB LAYOUT

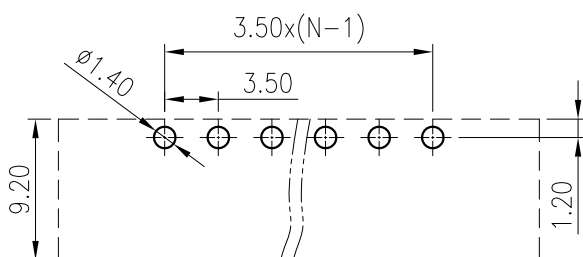

T1	Change the frame	Wu LF	2020.06.01
REV	ECN	DESCRIPTION	DRFT
		DATE	