
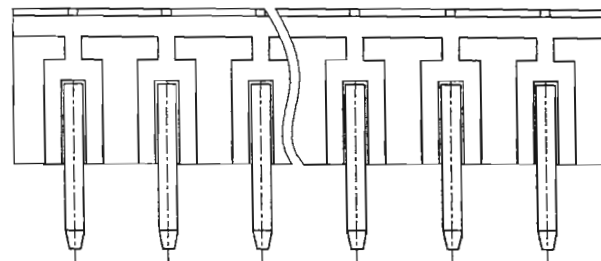
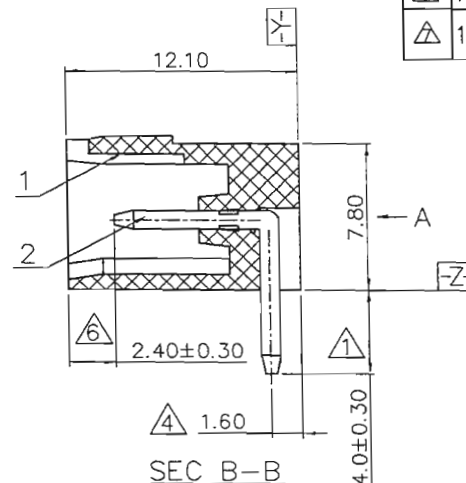
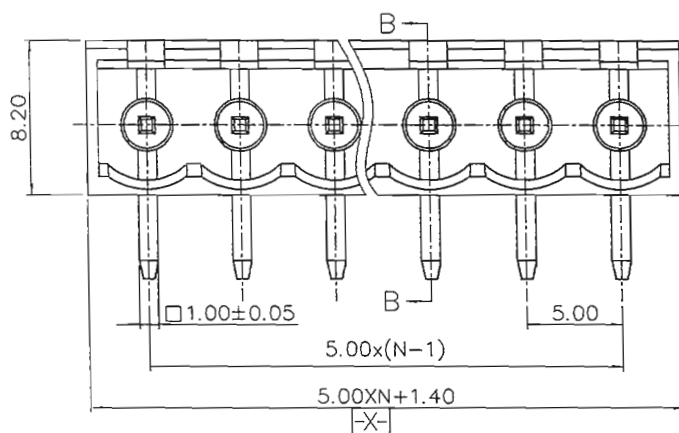



active

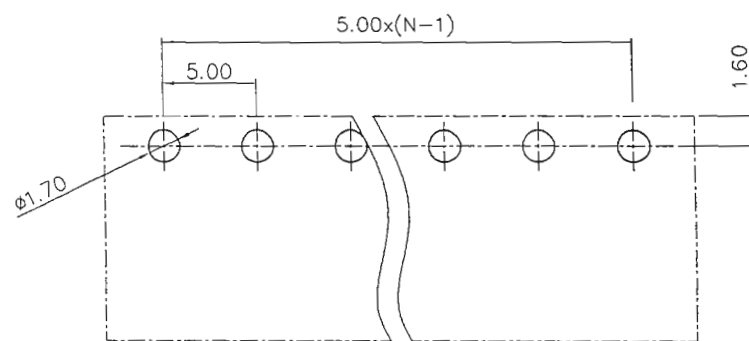

VIEW A

**DEGSON**
-5.0
2EDGRC

P.C.B LAYOUT

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△1		4.5±0.1变更到4.0±0.3	DZJ	06/14/05
△2		图面更新	CSX	04/08/06
△3		增加VDE、CE刻字	Yej	02/26/08
△4		更新图面	LJH	04/16/08
△5		增加自动化方针	WLM	09/23/08
△6	10-0329	增加标注尺寸	COCO	09/0/08
△7	14-0107	黄铜变紫铜, 料号变更; 工频耐压变更为额定冲击电压	XLM	06/23/14

NOTES:

- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 5.0MM ,POLES: 2-24P
- 3.RATED VOLTAGE/CURRENT: UL 300V/15A
VDE 320V/20A
- 4.OPERATION TEMPERATURES: -40℃~+105℃
- 5.RATED IMPULSE VOLTAGE: 4.0KV
- 6.INSULATION RESISTANCE: 5000MΩ/DC1900V
- 7.UNDIMENSIONED TOLERANCES:

△5	2	2EDGR(A)-Pin header Automatic assembly	1008B00340(H)	XX	COPPER	Sn Plated
△	2	2EDGR(A)-Pin header Manual assembly	1008B00330(H)	XX	COPPER	Sn Plated
	1	2EDGRC-5.0 Housing	1019A0YXXA(H)	1	PA66	UL94V-0
ITEM		NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES

TOLERANCES EXCEPT AS NOTED		MATERIAL:		FINISH:		NAME:	
.X ±		.X" ±		PART NO.:		2EDGRC-5.0-XXP-1Y-00A(H)	
.XX ±		.XX" ±		APPD:		TITLE: ASSEMBLY DRAWING	
.XXX ±		.XXX" ±		CHKD:		DRAWING NO.: 2EDGRC-5.0-E02	
ANGLES ± 1°		THIRD ANGLE PROJECTION		DRFT: HW 05/05/05"		DO NOT SCALE DRAWING	
						SCALE N/A	
						SHEET 1/1	