
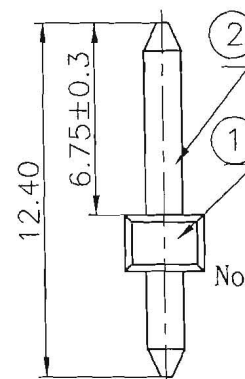


D1RFRD006


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		PA66+25%GF代替PBT料	Hooyh	05/10/11
△		PA66+10%GF代替PA66+25%GF	WF	08/12/08
△	12-0139	修改针头部尺寸	ZMT	07/07/12

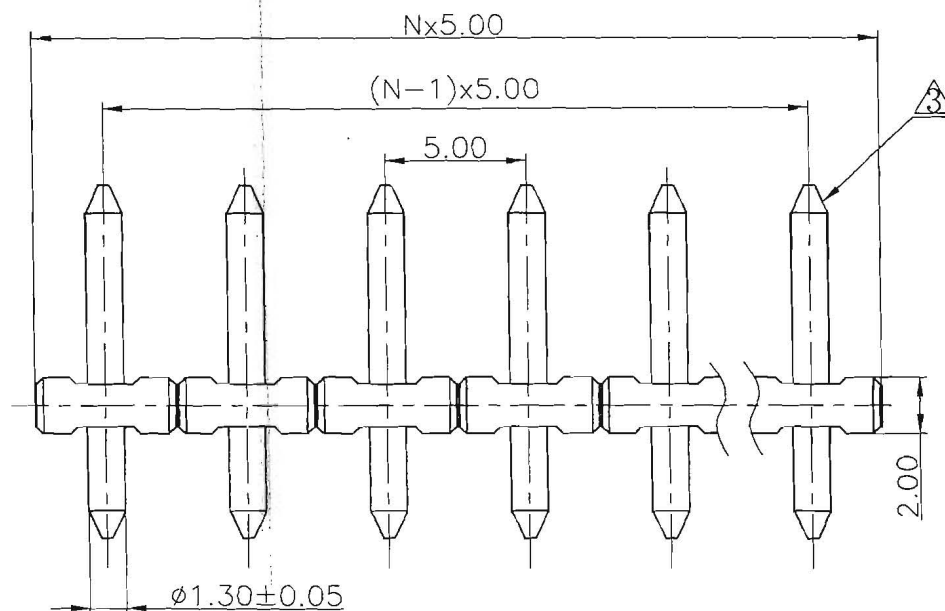

Notes:

1. Rated voltage: 300V
2. Rated current: 10A
3. Insulation resistance: 5000MΩ/DC1000V
4. Withstanding voltage: AC1500V/1min
5. Temp. Range: -40° C ~ +105° C
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480		—
to 6	±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7



2	DG332-Pin header	4014B00010 (H)	XX	Brass	SnCe
1	DG332J-5.0-Housing	4014A0YXXA (H)	1	PA66+10%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM: .0 ±, .00 ±, .000 ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTD Hooyh CHKD DATE MFO DATE APPRV DATE MATERIAL: G.E.: FINISH: SCALE: 1:1 DATE 05/12/05 DATE 07/12/12 DATE 07/12/12 NAME DG332J-5.0-XXP-1Y-00A(H) DRAWING NO. DG332J-5.0-E05 SIZE A3 REV T3 DATE 07/07/12					
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					