
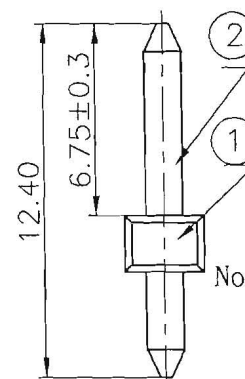


D1RFRD006


| REVISION RECORD |         |                        |       |          |  |
|-----------------|---------|------------------------|-------|----------|--|
| REV             | ECO     | DESCRIPTION            | DRFT  | DATE     |  |
| △               |         | PA66+25%GF代替PBT料       | Hooyh | 05/10/11 |  |
| △               |         | PA66+10%GF代替PA66+25%GF | WF    | 08/12/08 |  |
| △               | 12-0139 | 修改针头部尺寸                | ZMT   | 07/07/12 |  |

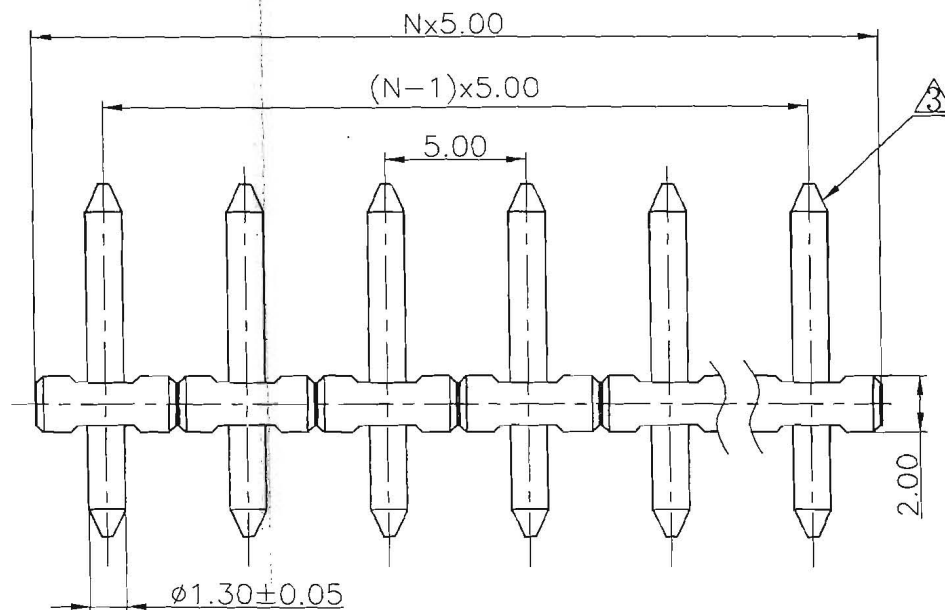

Notes:

1. Rated voltage: 300V
2. Rated current: 10A
3. Insulation resistance: 5000MΩ/DC1000V
4. Withstanding voltage: AC1500V/1min
5. Temp. Range: -40° C ~ +105° C
6. Undimensioned Tolerances:

| Pitch range in mm |         | Nominal dimension range in mm |         |          |           |            |      |      |
|-------------------|---------|-------------------------------|---------|----------|-----------|------------|------|------|
| to                | over    | to                            | over    | to       | over      | to         | over |      |
| 6                 | 6 to 10 | 10 to 24                      | 6 to 30 | 30 to 90 | 90 to 200 | 200 to 480 |      | ∩    |
|                   | ±0.10   | ±0.15                         | ±0.25   | ±0.1     | ±0.2      | ±0.3       | ±0.5 | ±0.7 |

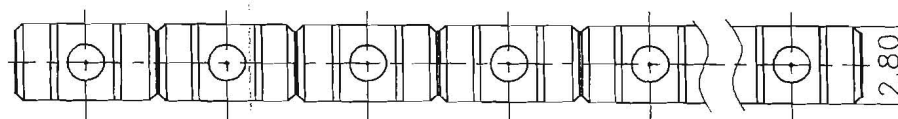

| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                  | DG332-Pin header   | 4014B00010 (H) | XX   | Brass      | SnCe    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|------|------------|---------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                  | DG332J-5.0-Housing | 4014A0YXXA (H) | 1    | PA66+10%GF | UL94V-0 |
| ITEM                                                                                                                                                                                                                                                                                                                                                                                                                                               | NAME OF PART       | NO. OF PART    | Q'TY | MATERIAL   | NOTES   |
| <div> <div> MM<br/>(INCH)<br/>TOLERANCES EXCEPT AS NOTED<br/>MM<br/>.0 ±<br/>.00 ±<br/>.000 ±<br/>ANGLES ± 1°<br/>THIRD ANGLE PROJECTION </div> <div> DFTO Hooyh<br/>CHKD<br/>MFO<br/>APPRV<br/>DATE 05/12/05<br/>DATE 07/07/12<br/>DATE<br/>MATERIAL :<br/>G.E :<br/>FINISH :<br/>SCALE : 1:1 </div> <div> NAME<br/>DG332J-5.0-XXP-1Y-00A(H)<br/>DRAWING NO. DG332J-5.0-E05<br/>/PART NO.<br/>DO NOT SCALE DRAWING<br/>SHEET 1 OF 1 </div> </div> |                    |                |      |            |         |

active