


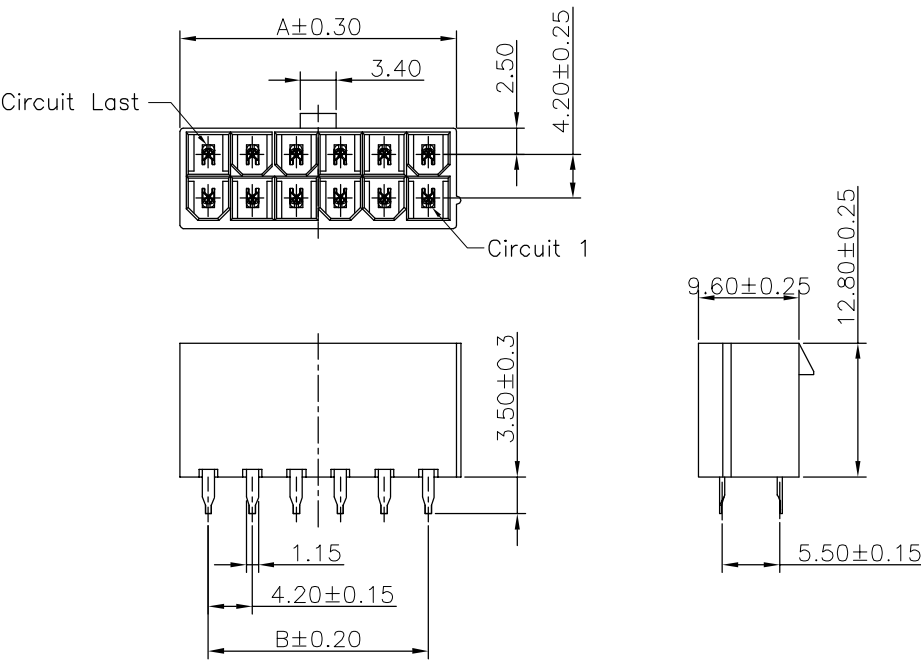

Specifications:

Current Rating:9.0A AC/DC

Voltage Rating:600V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:1500V AC For One Minute

Operating Temperature Range:-40°C To +105°C

Materials:

Insulator:Nylon 66 (UL94V-0)

Insulator Color:White

Terminal:Brass

Plating: Matte Tin Plated

How To Order:

2266S-XX-V0-F4A


UL94V-0

No. of Contacts

S:Staight Type Double Row


Dimension Information:

Pin.No	Dim.A	Dim.B	Pin.No	Dim.A	Dim.B
2	5.4	—	14	30.6	25.2
4	9.6	4.2	16	34.8	29.4
6	13.8	8.4	18	39.0	33.6
8	18.0	12.6	20	43.2	37.8
10	22.2	16.8	22	47.4	42.0
12	26.4	21.0	24	51.6	46.2

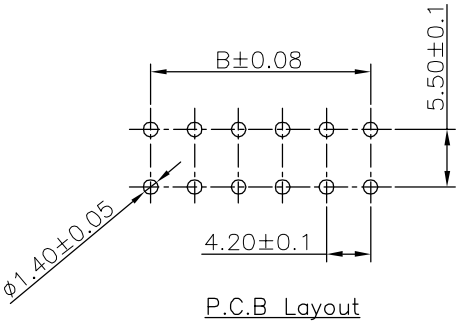

RoHS Compliant

F				DRAWN: MEI	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	 Neltron Industrial Co., Ltd.	
E							
D				CHECKED: JERRY	UNIT: MM	DESCRIPTION: 4.2mm Power Wafer Double Rows Straight Type	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: RORY	SHEET: 1/1	PART NO: 2266S-XX-V0-F4A	
A	28-Jul-2016		MEI		PROJECTION: 		
REV	DATE	FILE	BY				

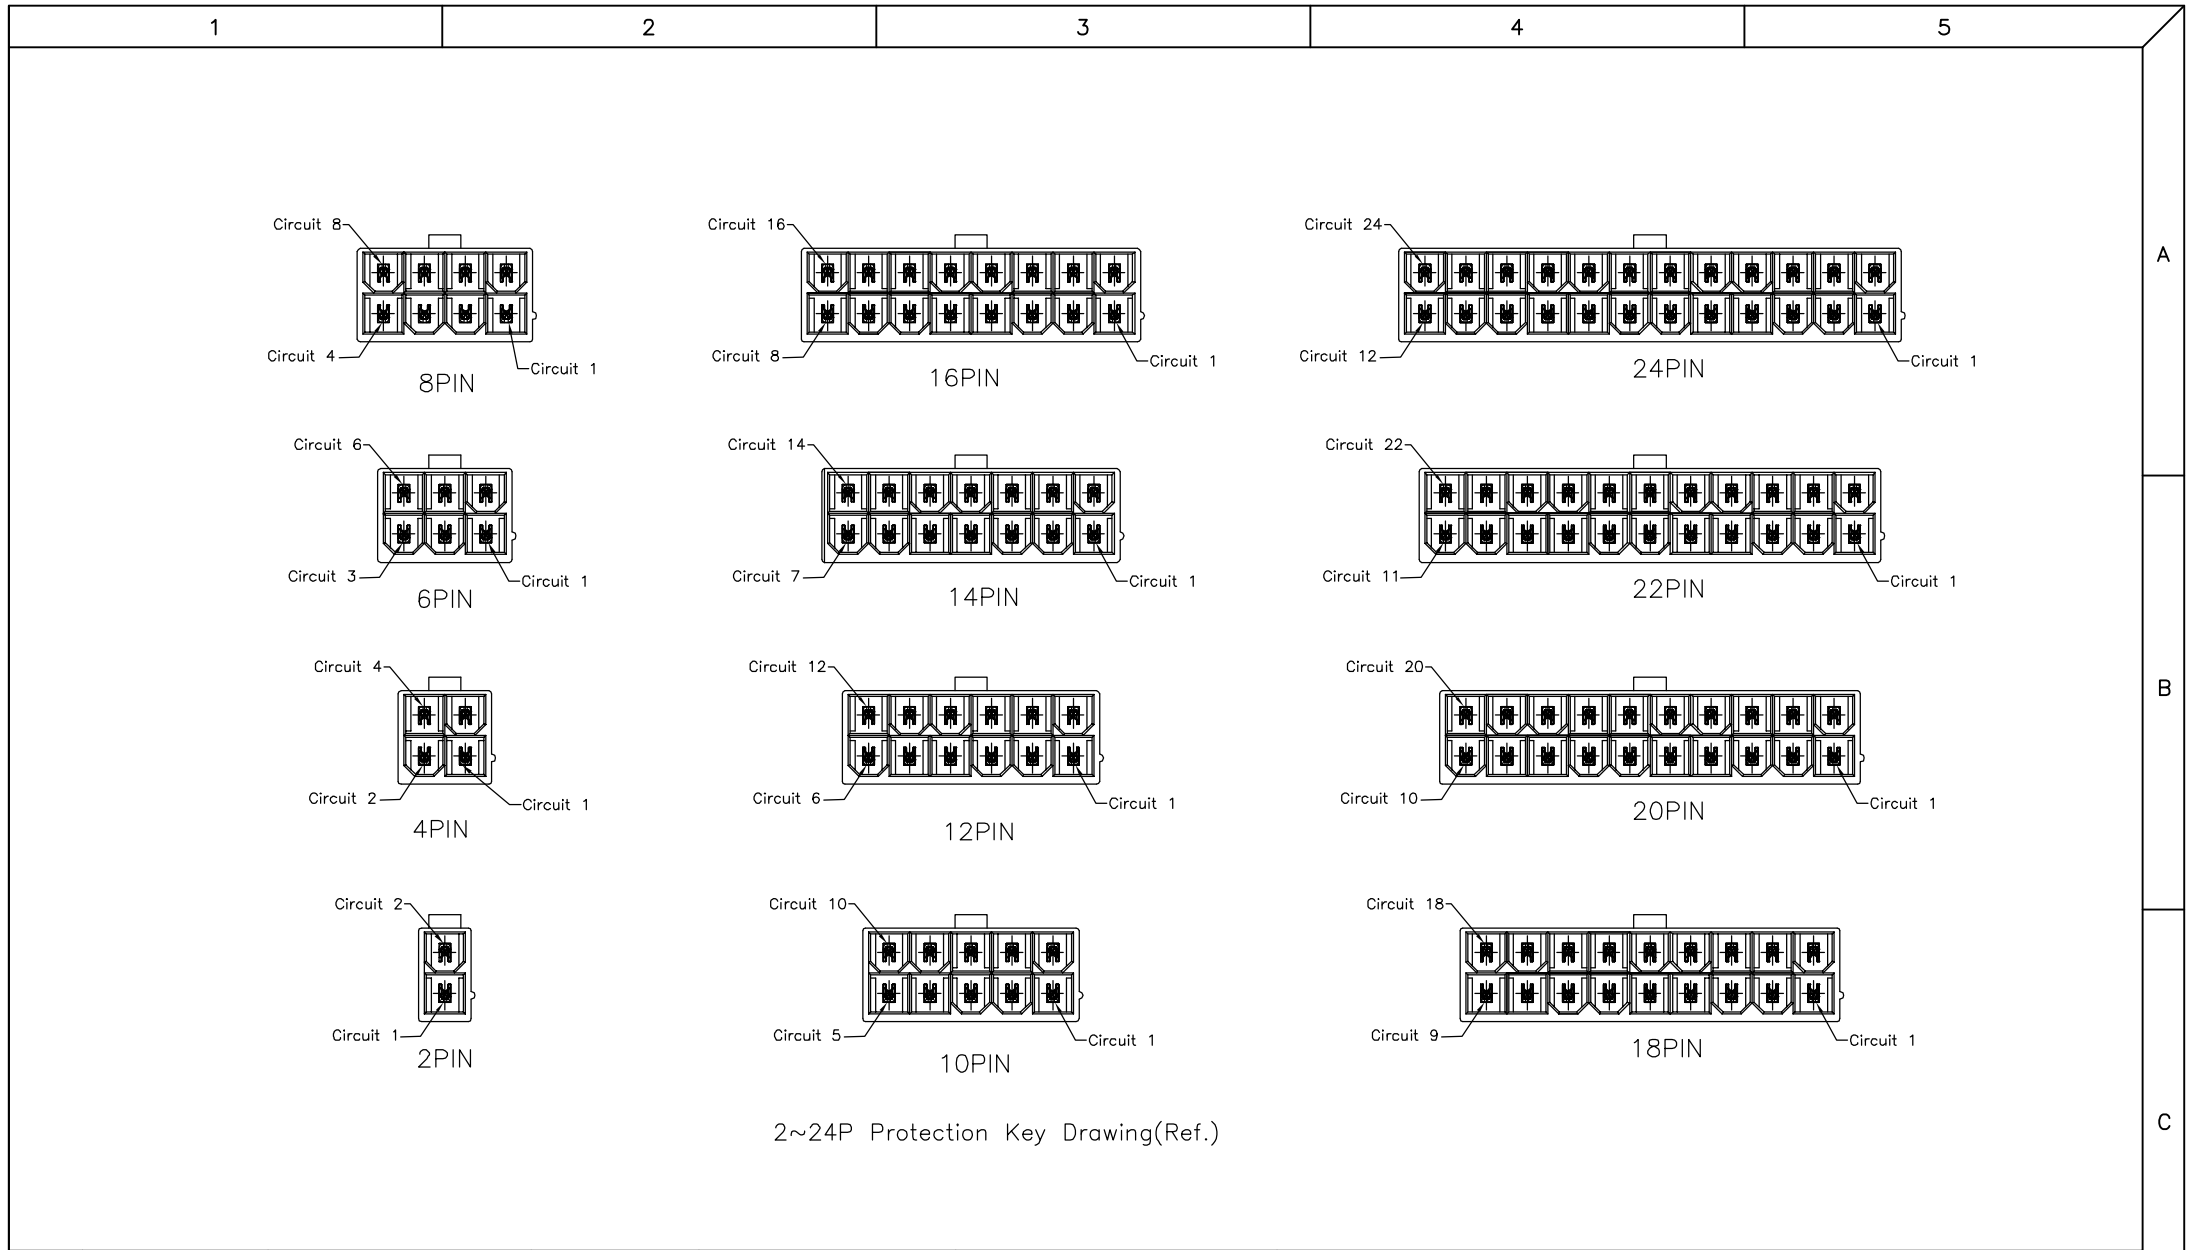

F				DRAWN: MEI	GENERAL TOLERANCE: .X=±0.40 .XX=±0.30	 Neltron Industrial Co., Ltd.	
E							
D							
C							
B				CHECKED: JERRY	UNIT: MM	DESCRIPTION: 4.2mm Power Wafer Double Rows Straight Type	SIZE A4
A	28-Jul-2016		MEI	APPROVAL:	SCALE: 1:1		
REV	DATE	FILE	BY	RORY	SHEET: 1/1	PART NO: 2266S-XX-V0-F4A	
					PROJECTION: 