


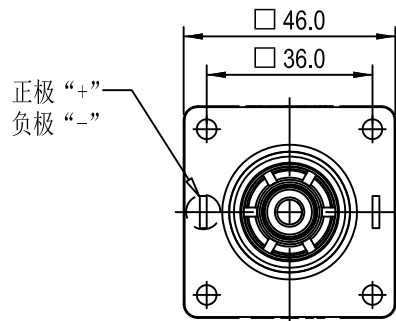


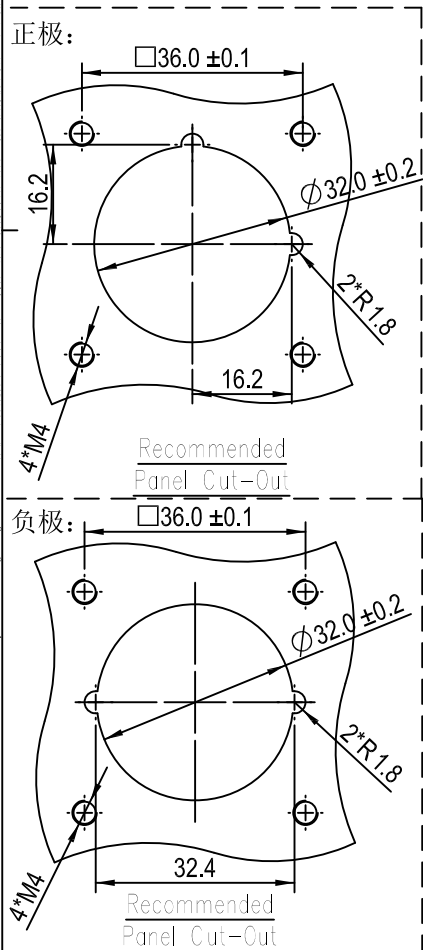


其他接线方式：形式一：

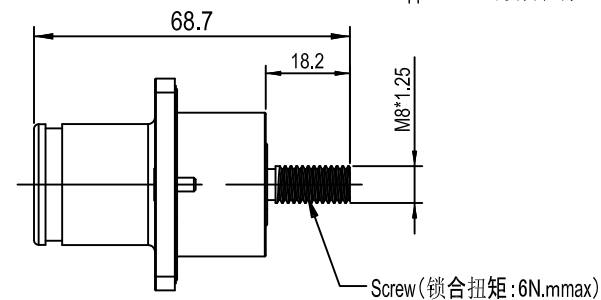


形式二：

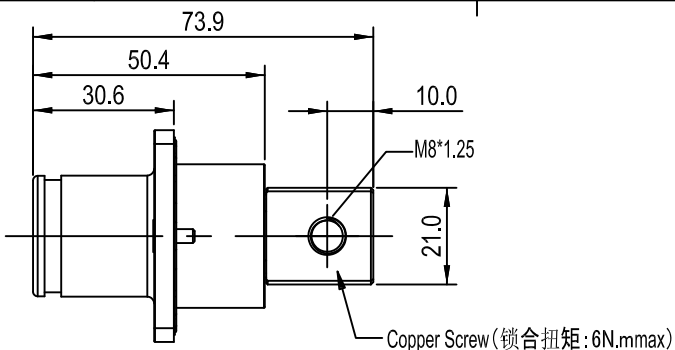

形式三：

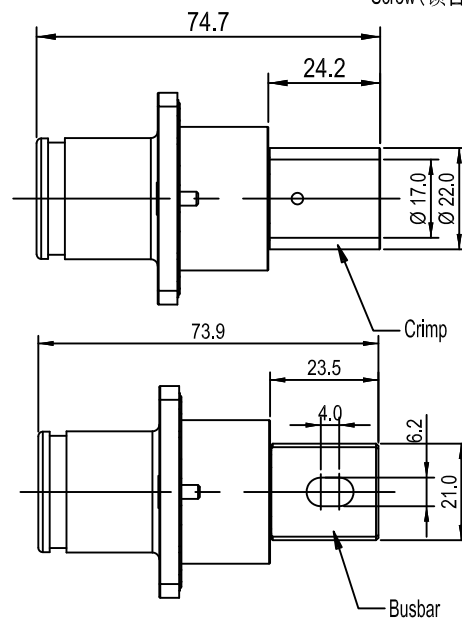

仅Copper Screw的形式3D展示：

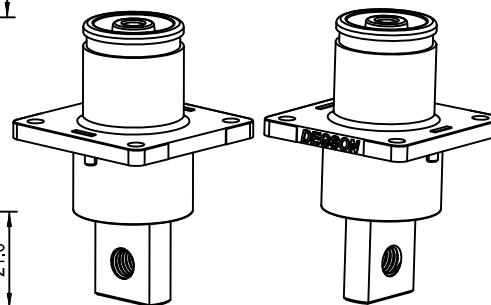

ESS-400A-250-X-XX-00

Color: BK : Black 负极
OR : Orange 正极
RD : Red 正极

Contact Termination: B : Busbar
C : Crimp
S : Screw
B/S : Copper Screw

技术要求/Technical requirements:


颜色(Color)	Black、Orange、Red
锁紧方式(Locking method)	卡扣(Buckle)
接线方式(Terminal)	Busbar、Screw、Crimp、Copper
外壳材料(Housing material)	PA+GF
接触件材料(Connector material)	铜合金(Copper alloy)
插入力(Insertion force)	80N Max
拔出力(Withdrawal force)	>10N
插拔次数/Mechanical working life(mating cycles)	100
安装螺母紧固扭矩(Screw torque)	M4/0.4~0.7N.m
接线规格(Wiring specifications)	250kcmil
建议剥线长度(Suggested stripping length)	22~24mm(Crimp type)
线径OD(Wire diameter)	20~22mm(Crimp type)
额定电压(Rated voltage)	1500V DC/min
耐电压(Withstanding voltage)	6800V
额定电流(Rated current)	400A
绝缘电阻(Insulation resistance)	≥5000MΩ(drying)
接触电阻(Contact resistance)	≤0.2mΩ
过电压等级(Overvoltage category)	III
污染等级(Pollution degree)	3
使用温度范围(Operating temperature)	-40~+125°C (including temperature rise)
盐雾(Salt spray)	48H
储存温度(Storage temperature)	-40~+85°C
阻燃等级(Flame retardant ability)	UL94-V0
防护等级(Ingress protection)	IP67(Mated)
符合RoHS环保要求(Conform to RoHS)	Yes



MATERIAL:	SURFACE/COLOR:	
MAT NO./REV:	/	
NAME	ESS-400A-250-X-XX-00	
DRAWING NO.	TYPE	DRAWING STATUS
	CUSTOMER DRAWING	
SCALE	SHEET	
1:1	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE

APPD:	
CHKD:	
DRFT:	



A

B

C

D