

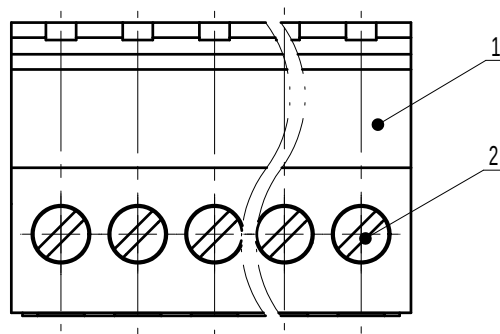

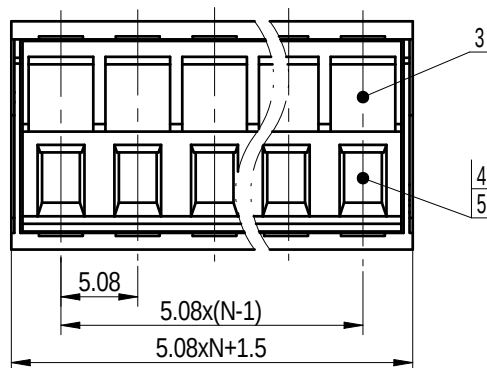


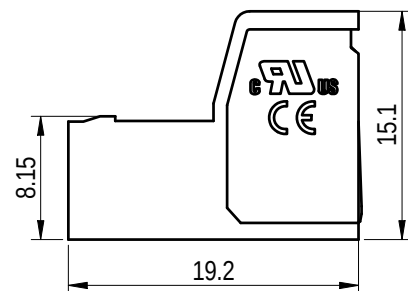

公差/General tolerances (mm)														0.1/10 ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

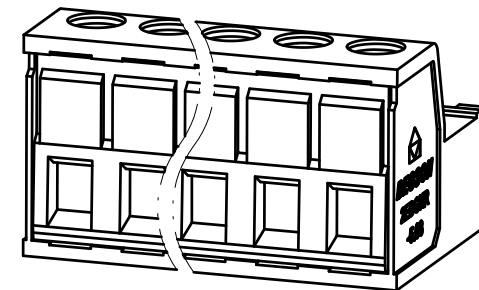

Note:

The A&Z(H) in the name means: A(H) and Z(H).

5	Pin	Copper	Sn Plated
4	Cage	Copper alloy	M2.5/Ni Plated
3	Cover	PA66	UL94V-0
2	Screw	Steel	M2.5/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~12/ 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

			MATERIAL:		SURFACE/COLOR:	
			MAT NO./REV: / 00		MAT STATUS: 批量	
APPD:	兰春华	2022.09.27	NAME			
CHKD:	龚耀志	2022.09.26	2EDGKR-5.08-XXP-1Y-00A&Z(H)			
DRFT:	刘强	2022.09.26	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		A4		200030352	CUSTOMER DRAWING	已发布
					2:1	SHEET 1/1

00			刘强	2022.09.26
REV	ECN	DESCRIPTION	DRFT	DATE