

SR-6 - Sensor Socket for TGS26xx and 84xx-series Sensors

Features:


- * Durable for over 100 insertions and removals
- * Firmly fixes sensor into place

Applications:


- * For use in preheating racks, test and calibration equipment
- * For use in finished products



Structure and Dimensions

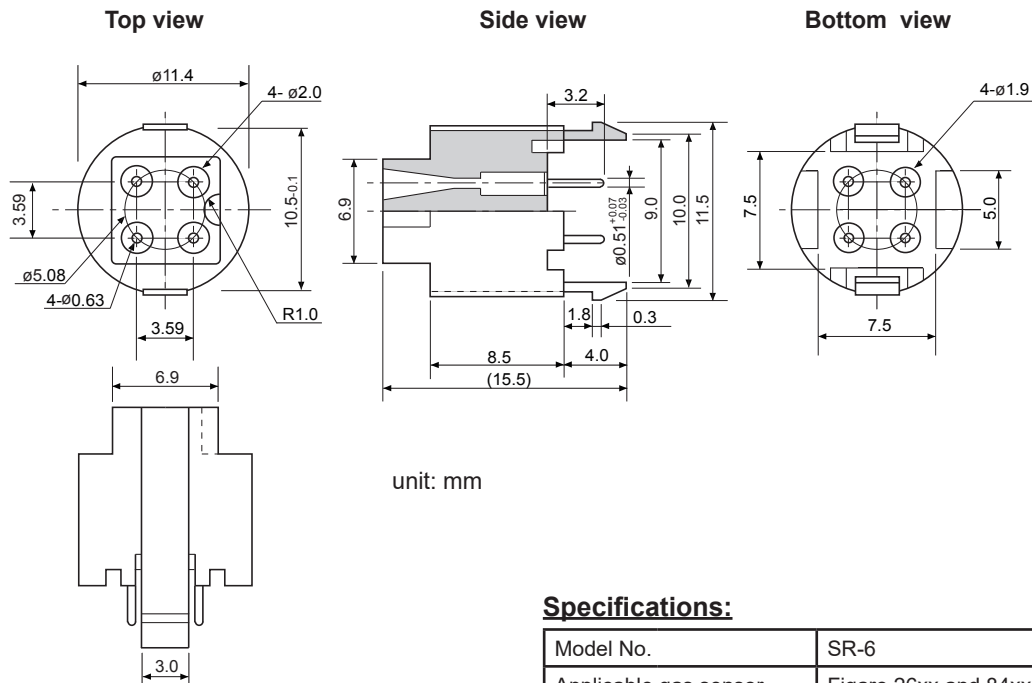

Recommended PCB Layout



Specifications:

Model No.	SR-6	
Applicable gas sensor	Figaro 26xx and 84xx series	
Operating conditions	-20°C ~ 70°C	
Material	Contact pins	Beryllium copper (gold plate finish)
	Sleeve	Brass or bronze (tin plate finish)
	Insulator	Polyphenylene sulfide (PPS)
Weight	approx 1.5g	