

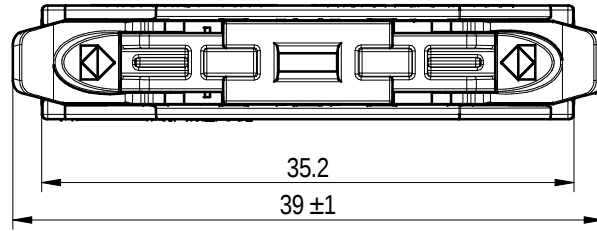

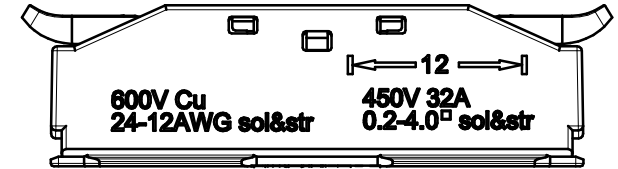



active

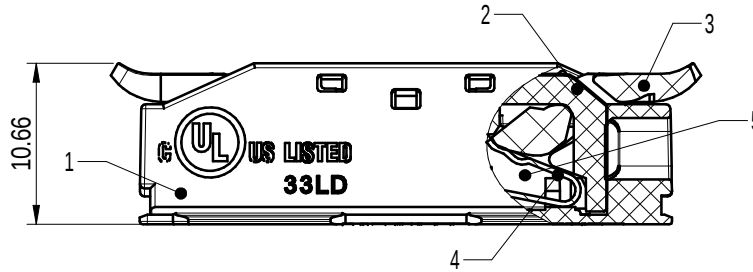

未注公差/General tolerances(mm)														0.1/10 ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:	
额定电压/电流/Rated Voltage(V)/Current(A)	600
IEC 标准/IEC Standard:	
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2
额定电压/电流/Rated Voltage(V)/Current(A)	450/32
工频耐压/Withstanding voltage(V/1Min)	AC2500
线数范围/Poles	N=01P
线径范围(硬线和软线)/Wire Range(rigid and	24~12/ 0.2~4.0
线数范围/Poles	N=01P
剥线长度/Stripping length(mm)	12~13
使用温度范围/Operating temperature(°C)	-40~+85(IEC)



SCAL 1:1

5	Current carrier	Copper	Sn Plated
4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES

 DEGSON		MATERIAL: /		SURFACE/COLOR: /	
		MAT NO./REV: - / 00		MAT STATUS: 批量	
APPD: 蓝贵凡	2023.06.10	NAME DGBSC-SG02/4-01P (17-00ZH)			
CHKD: 曹利彬	2023.06.10				
DRFT: 曹利彬	2023.06.10	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200199127	CUSTOMER DRAWING	Work	1:1
				SHEET	1/1

图纸版本	ECN	变更描述	设计人	设计日期
REV	ECN	DESCRIPTION	DRFT	DATE