

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商标权、专利权、著作权等知识产权外，其他权利均归本公司所有。未经许可，不得复制或传播。

FOR-1755 Rev.1.6

2







3

4

5

6

PCB LAYOUT

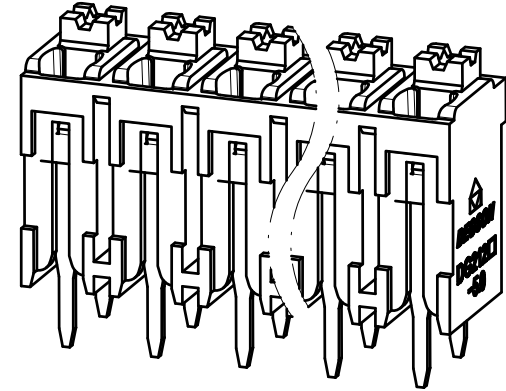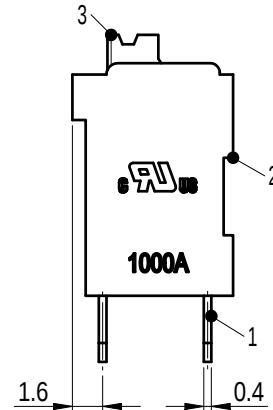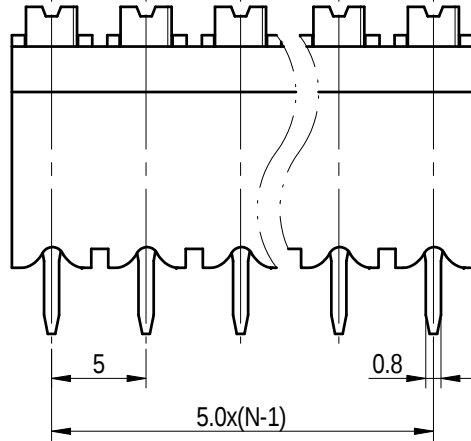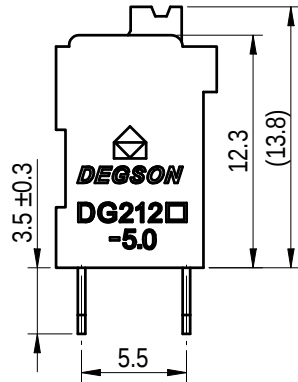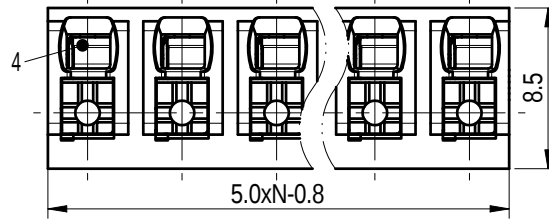

Note: The A&Z(H) in the name means: A(H) and Z(H).

4	Spring	Stainless steel	/
3	Button	PA66+GF	UL94V-0
2	Housing	Thermoplastic	UL94V-0
1	Pin header	Copper Alloy	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/12	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		320/17.5	320/17.5	500/17.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		28~14 / 0.2~1.5		
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~24P		
剥线长度/Stripping length(mm)		8~9		
使用温度范围/Operating temperature(°C)		-40~+130		
符合RoHS环保要求/Conform to RoHS		Yes		



		MATERIAL: -		SURFACE/COLOR:		
MAT NO./REV: -		/ 00		MAT STATUS: 批量		
APPD: 兰春华	2022.10.19	NAME				
CHKD: 陈招	2022.10.19	DG212V-THR-5.0-XXP-1Y-1000A&Z(H)				
DRFT: 袁路易	2022.10.19	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
	A4	200068675	CUSTOMER DRAWING	已发布	2.5:1	1/1

01			袁路易	2022.10.19
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6