




Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、名称权、商号权、域名权、其他知识产权等权利外，本公司保留对设计、发明、实用新型、外观设计、发明专利、软件著作权、商标、名称权、商号权、域名权、其他知识产权等权利的所有权。

FOR-1755 Rev.1.7

PCB LAYOUT

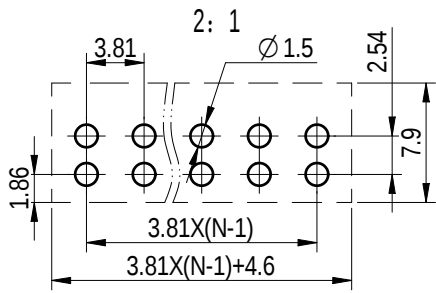


active

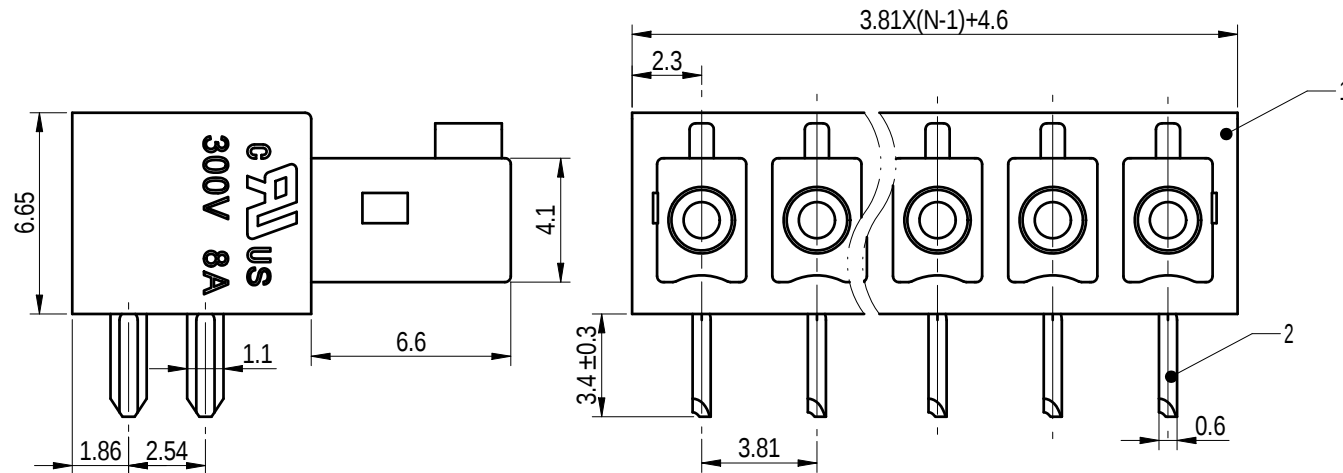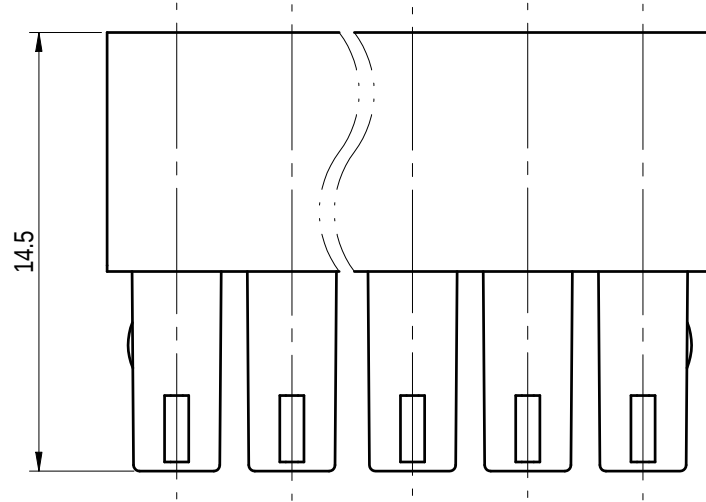

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500	±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

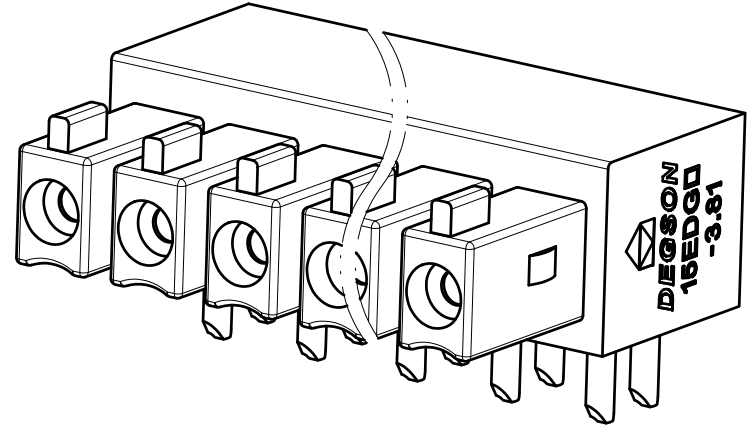

Note:

The A&Z (H) in the name means: A(H) and Z(H).

2	Clamp	Copper alloy	Sn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		160/7	250/7	320/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		2.5	2.5	2.5
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~24P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		

		MATERIAL:		SURFACE/COLOR:	
MAT NO./REV: -		/ 00		MAT STATUS: 批量	
APPD: 兰春华		2022.09.15		NAME	
CHKD: 龚耀志		2022.09.15		15EDGA-3.81-XXP-1Y-00A&Z (H)	
DRFT: 方哲盛		2022.09.15		DRAWING NO.	
00		2022.09.15		200019386	
REV		ECN		TYPE	
DESCRIPTION		DRFT		CUSTOMER DRAWING	
DATE		DRAWING STATUS		已发布	
A4		SCALE		4:1	
(inch)		SHEET		1/1	