
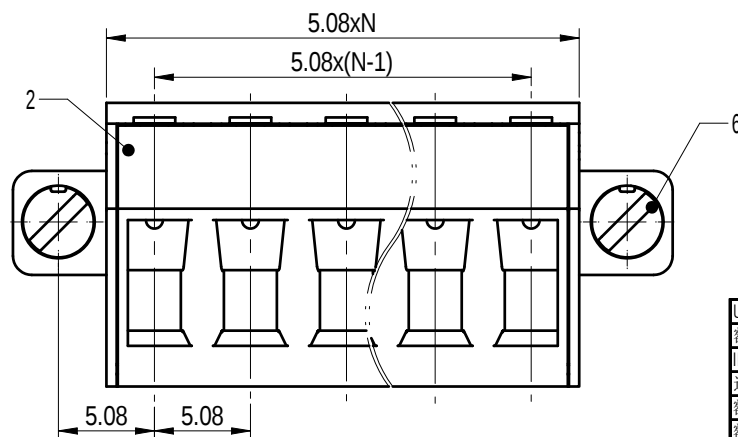
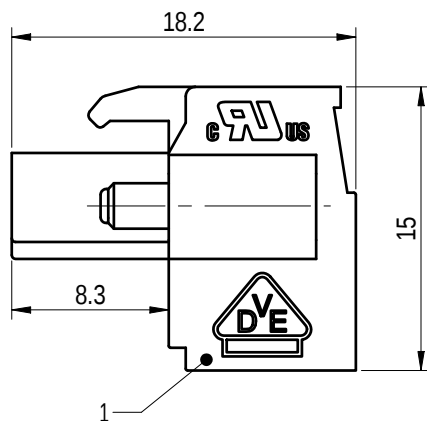
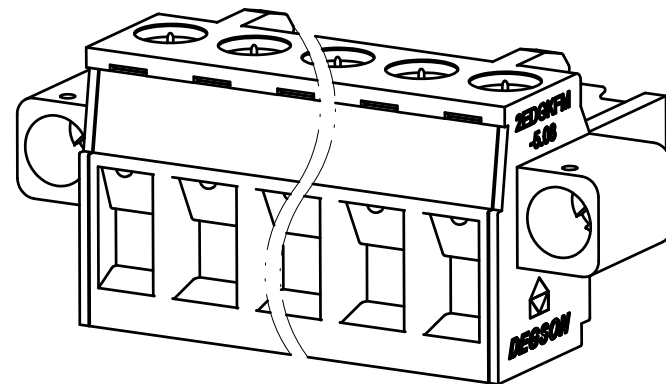


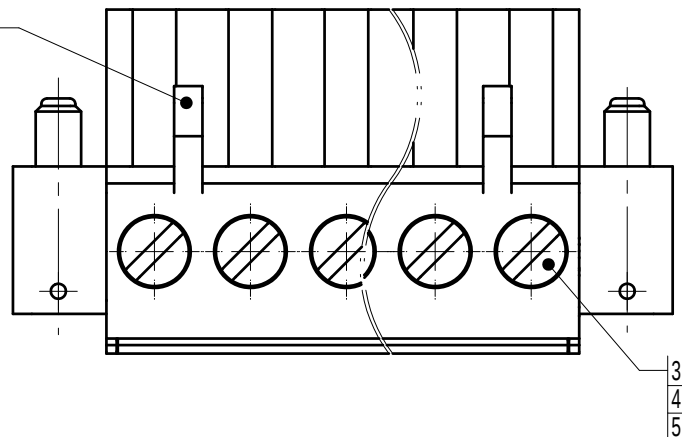

The A&Z(H) in the name means: A(H) and Z(H).

6	Screw2	Steel	Zn Plated
5	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	Ni Plated
3	Screw1	Steel	Zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~12 / 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	508/N=02~24P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~-105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

			MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华 2022.11.17 CHKD: 樊耀志 2022.11.17 DRFT: 方哲盛 2022.11.17			MAT NO./REV: - / 01		MAT STATUS: 批量	
NAME			2EDGKFM-5.08-XXP-1Y-1000A&Z(H)			
DRAWING NO. 200019494			TYPE CUSTOMER DRAWING		DRAWING STATUS 已发布	
SCALE 2.5:1			SHEET 1/1			

00			方哲盛	2022.11.17
REV	ECN	DESCRIPTION	DRFT	DATE