
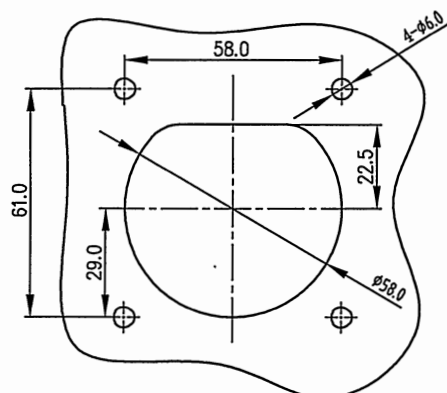
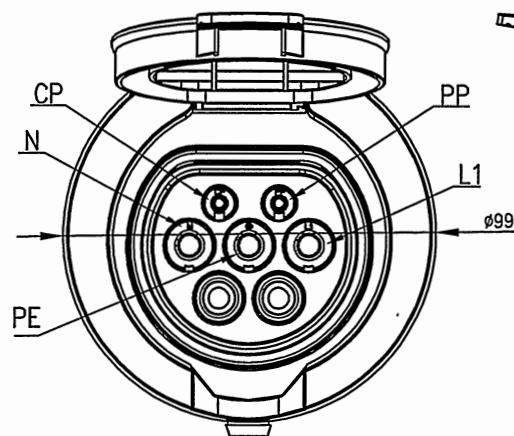


REVISION RECORD



REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

Installation plate dimension

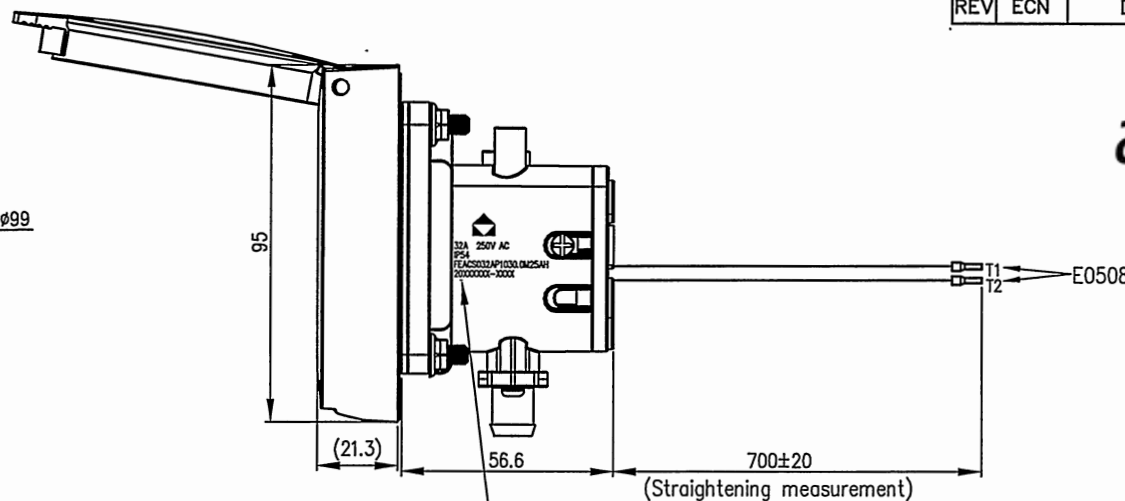

Laser Printing:

Temperature sensor clip hole
for NTC sensor

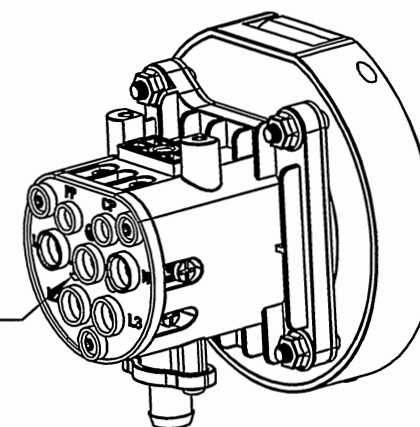Technical data

Rated voltage	250V AC
Rated current	32A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1min
Withstanding Voltage	L, N and PE 2500V AC 1min L and N 2500V AC 1min
Ingress protection rating	IP54
Mechanical Working Life (Mating Cycles)	10,000 Times
Standard	IEC 62196-2:2016
Flame Class	UL 94V-0

Connection Mode:

L1	(6mm ²)	L1
N	(6mm ²)	N
PE	(6mm ²)	PE
PP	(0.75mm ²)	PP
CP	(0.75mm ²)	CP
NTC	White	T1
	White	T2

Attention:

The Thermistor is placed beside of L1

The Thermistor is NTC

(Specification :T= 25℃ .Resistance = 10±1% Kohm).

The resistance decreases with increasing temperature

Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	XX	X
	±0.5°	±1.0°

DETACHED LISTS

PART NO.:

APPD: 2X 2019.02.1

CHKD: DT 2019.10.21

DRFT: LLL 2019-10-21



THIRD ANGLE PROJECTION



NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

Socket-Outlet (32A AC single-phase)
FEAC-S-032A-P1-03-0.0M-25A(H)

TITLE: Customer Drawing

DRAWING NO.:

MM (INCH)

REV

DO NOT SCALE DRAWING

SCALE

DO-1

SHEET

1/1

2:5