







未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°

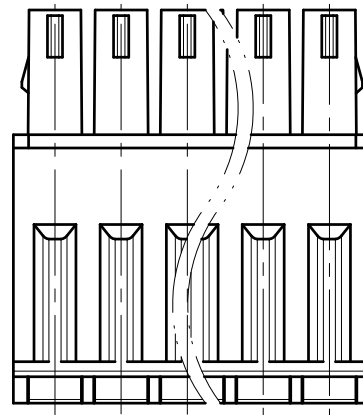

02-06P with clip point
07-24P without clip point

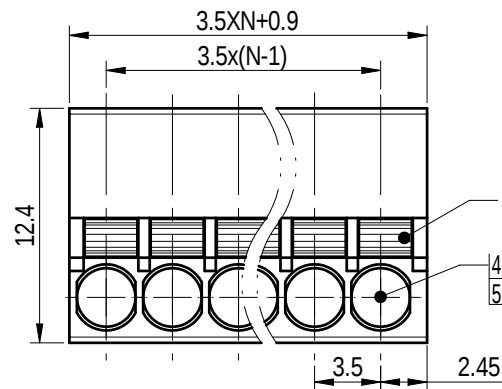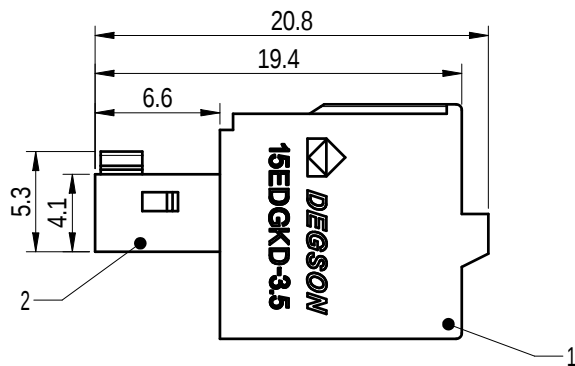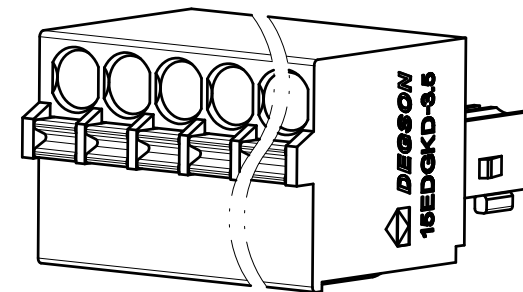

Note:

The A&Z(H) in the name means: A(H) and Z(H).

5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/	300/8
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	250/12	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)		28~16 / 0.2~1.5		
间距/Pitch(mm)/线数范围/Poles		3.5/N=02~24P		
剥线长度/Stripping length(mm)		9		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number: PANTONE / RAL		/		



MATERIAL:	SURFACE/COLOR:
MAT NO./REV: - / 00	MAT STATUS: 批量

APPD: 兰春华	2022.11.03
CHKD: 龚耀志	2022.11.03

NAME	15EDGKD-3.5-XXP-1Y-00A&Z(H)
------	-----------------------------

00			方哲盛	2022.11.02	DRFT: 方哲盛	2022.11.02	DRAWING NO. 200019524	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2.5:1	SHEET 1/1
REV	ECN	DESCRIPTION	DRFT	DATE							