



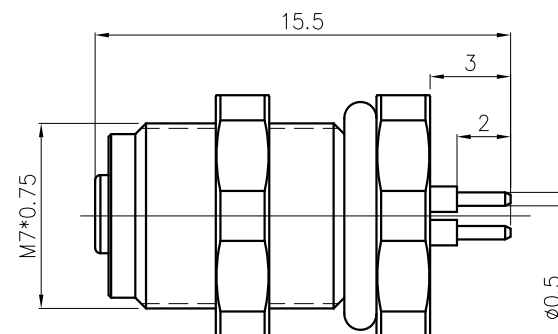


REVISION RECORD


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



3pin A Coding

Pin Assignment
Front View

4pin A Coding


Pin Assignment
Front View

SP-M5A-XXP-FF-SF7002-00A(H)


Pin number: 03,04

NOTES:


- 1.Rated voltage/current : 60V / 1A
- 2.Withstanding voltage : 800V
- 3.Levels of protection:IP67
- 4.Wire connection mode:soldering(PCB)
- 5.Operating temperature: -40°C~+85°C
- 6.For Panel Thickness Range : 2.0~4.0mm
- 7.RoHS Compliance
- 8.Tolerance :
 - .X $\pm 0.25\text{mm}$
 - .XX $\pm 0.1\text{mm}$
 - Angles $\pm 1^\circ$



PCB layout



PCB layout



Panel cut

DETACHED LISTS	PART NO.: SPM5AXXPFFSF700200AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SP-M5A-XXP-FF-SF7002-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.11	REV D0-1		
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1	
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1