
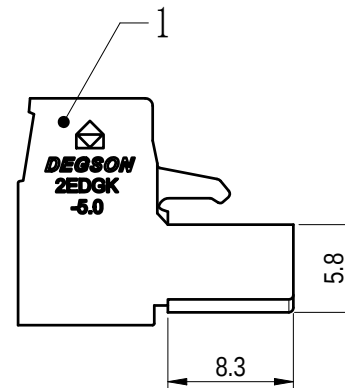


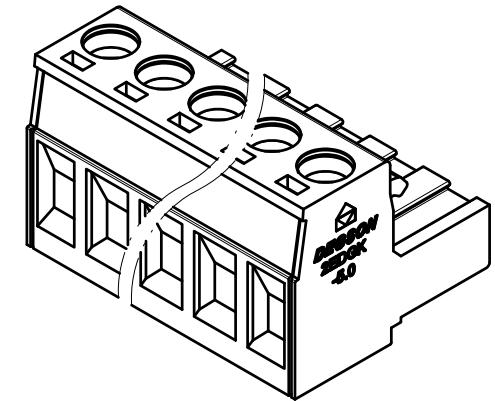

未注公差/General tolerances(mm)														 0.1/10  ±2°
0 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C D
额定电压/电压/Rated Voltage(V)/Current(A)		300/15	/ 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电压/Rated Voltage(V)/Current(A)		/	320/20 /
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4 /
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M3, 0.5/4.43
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)			28~12 / 1.0~2.5
间距/Pitch(mm)/线数范围/Poles			5.0/N=02~24P
剥线长度/Stripping length(mm)			7~8
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

		MATERIAL:		SURFACE/COLOR:		
		MAT NO./REV: - / 00		MAT STATUS: 批量		
APPD: 兰春华	2022.11.02	NAME 2EDGK-5.0-XXP-1Y-1000A&Z(H)				
CHKD: 龚耀志	2022.11.02					
DRFT: 朱岳鹏	2022.11.02	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
 A4	 (inch)	200029767	CUSTOMER DRAWING	已发布	2:1	1/1

00			朱岳鵬	2022.11.02
REV	ECN	DESCRIPTION	DRFT	DATE