







6-10P(Slots at both ends)

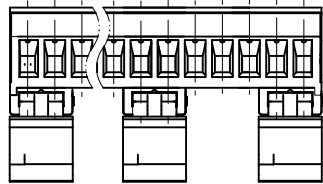


11-24P(Odd number poles:3 slots , slots position is shown in the view)



11-24P(Even number poles:3 slots, slots position is shown in the view)

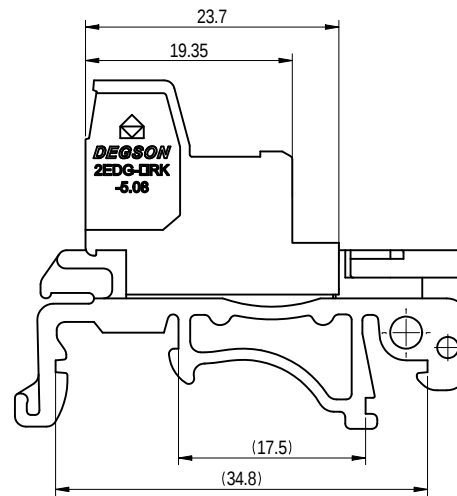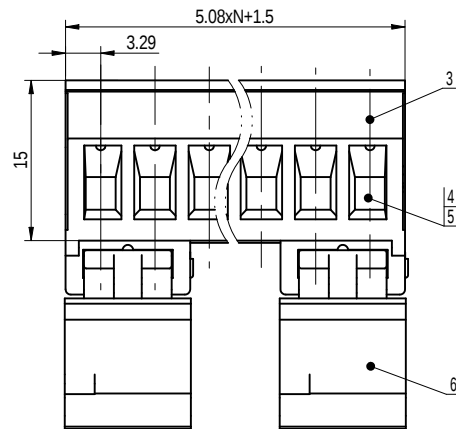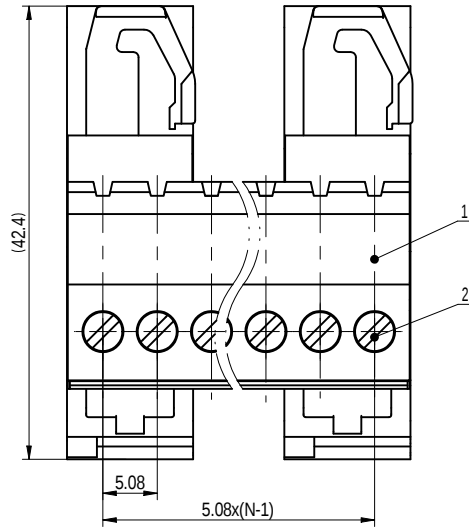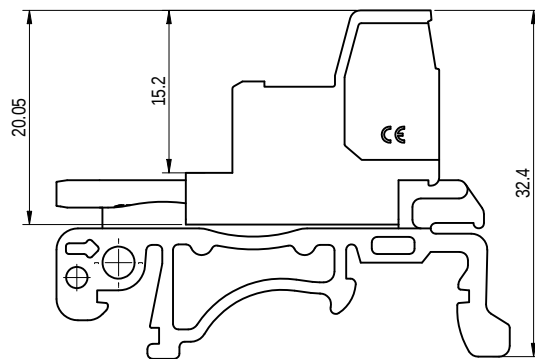

公差/General tolerances (mm)														0.1/10 ±2
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

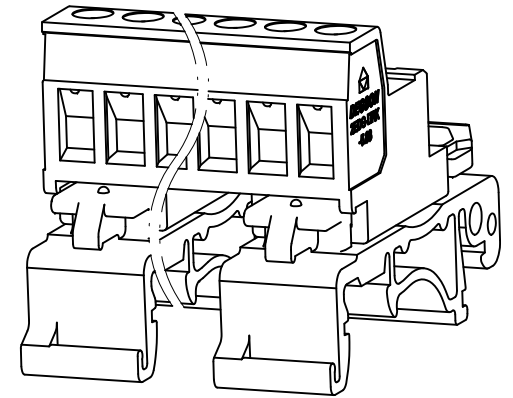

Note:
The A&Z(H) in the name means: A(H) and Z(H).

6	Housing2	PA66	UL94V-0
5	Pin header	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Cover	PA66	UL94V-0
2	Screw	Steel	M3/Zn Plated
1	Housing1	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电压/Rated Voltage (V)/Current (A)		B 300/15	C / D 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	II/2 II/2
额定电压/电压/Rated Voltage (V)/Current (A)		/	320/20 /
额定脉冲电压 (KV)/Rate Impulse Voltage (KV)		/	4 /
螺丝扭矩/Torque Tightening (N·m/Lb.in)		M3 0.5/4.43	
线径范围(硬线和软线)/Wire Range (rigid and flexible) (AWG/mm²)		28~12 / 1.0~2.5	
间距/Pitch (mm)/线数范围/Poles		5.08/N=06~24P	
剥线长度/Stripping length (mm)		7~8	
使用温度范围/Operating temperature (°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number: PANTONE / RAL		/	



APPD: 兰春华	2022.11.22	NAME		2EDG-URK-5.08-XXP-1Y-00A&Z(H)		
CHKD: 黄耀志	2022.11.22	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
DRFT: 刘强	2022.11.18	200030516	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			刘强	2022.11.18