


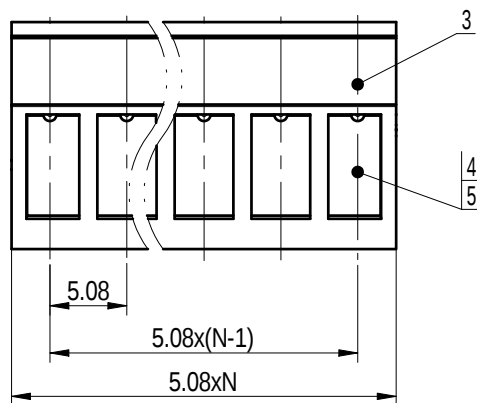



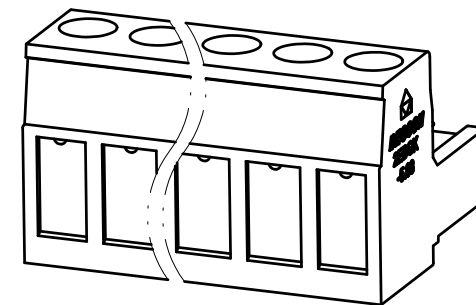

未注公差/General tolerances (mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

02P: Clasp on the left from this view

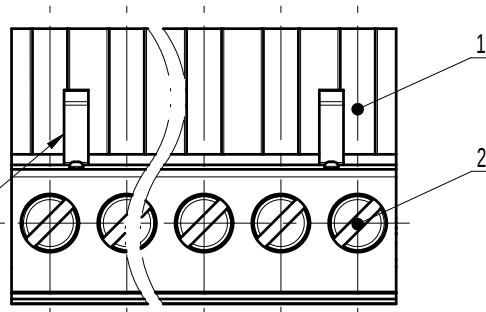

Note:

The A&Z(H) in the name means: A(H) and Z(H).

5	Clamp	Copper alloy	Sn plated
4	Cage	Copper alloy	M3/Ni plated
3	Cover	PA66	UL94V-0
2	Screw	Steel	M3/Zn plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~12 / 1.0~2.5		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

			MATERIAL:		SURFACE/COLOR:		
			MAT NO./REV: - / 00		MAT STATUS: 批量		
APPD:	兰春华	2022. 11. 01	NAME 2EDGK-5. 08-XXP-1Y-1000A&Z (H)				
CHKD:	龚耀志	2022. 11. 01					
DRFT:	刘强	2022. 11. 01	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
	A4		200101953	CUSTOMER DRAWING	已发布	2:1	1/1

00			刘强	2022. 11. 01
REV	ECN	DESCRIPTION	DRFT	DATE