

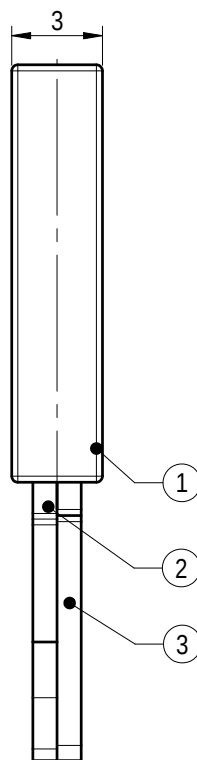
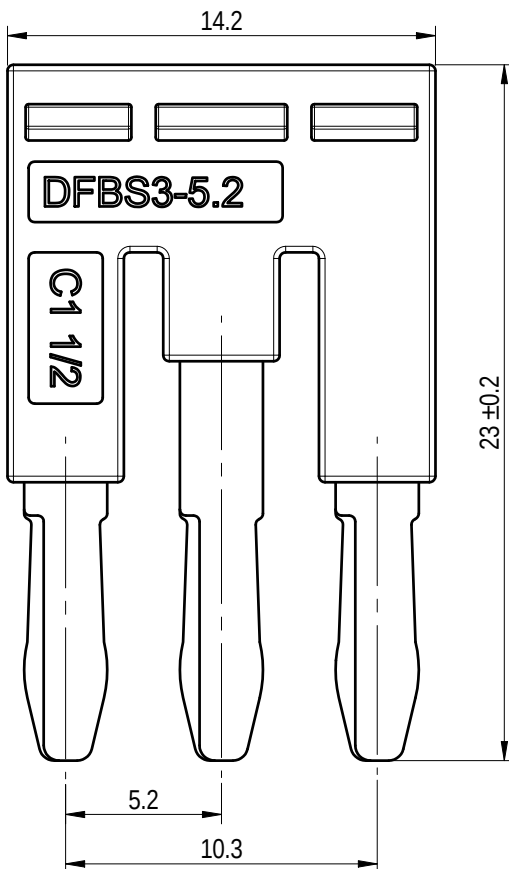


active



未注公差/General tolerances(mm)													0.1/10 ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

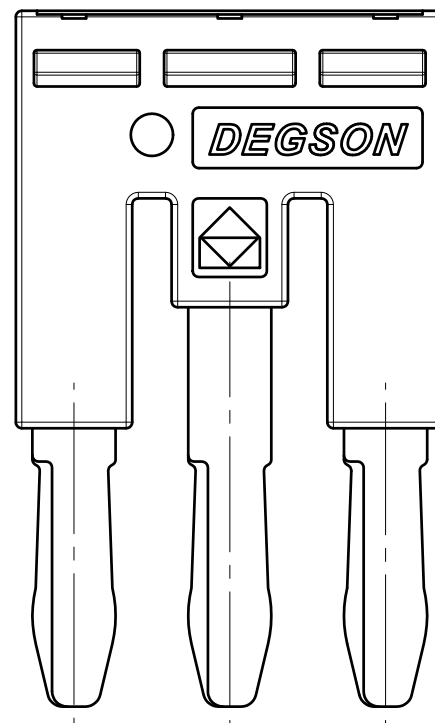

3	Current_carrier2	Copper	Sn_Plated
2	Current_carrier1	Copper	Sn_Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

间距/Pitch(mm)/线数范围/Poles	5.2/3P
使用温度范围/Operating temperature(°C)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes

APPD: Peng M	2022.06.15
CHKD: Gao WG	2022.06.15
DRFT: Huang RJ	2022.06.15
⊕	A4

MATERIAL: /	SURFACE/COLOR: /
MAT NO./REV: /	MAT STATUS: /
NAME	
DFBS3-5.2-1Y-00A(H)	
DRAWING NO. /	TYPE
CUSTOMER DRAWING	DRAWING STATUS /
SCALE 4:1	SHEET 1/1

00	/	/	Huang RJ	2022.06.15
REV	ECN	DESCRIPTION	DRFT	DATE