

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计、商业秘密、其他知识产权外，本公司保留对涉及发明、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计、商业秘密、其他知识产权的所有权利。

FOR-1755 Rev.1.6


2

3





4

5

6

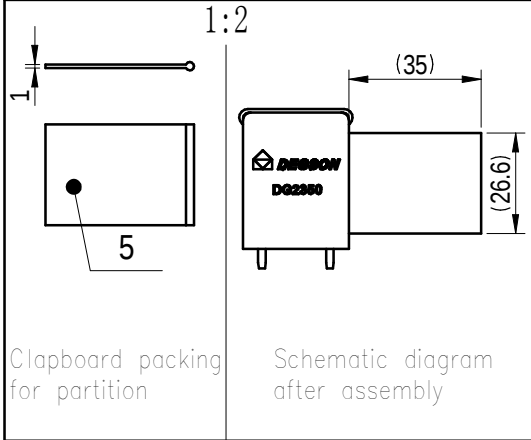

Without Cover

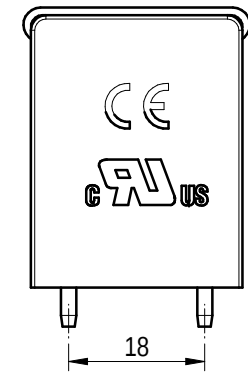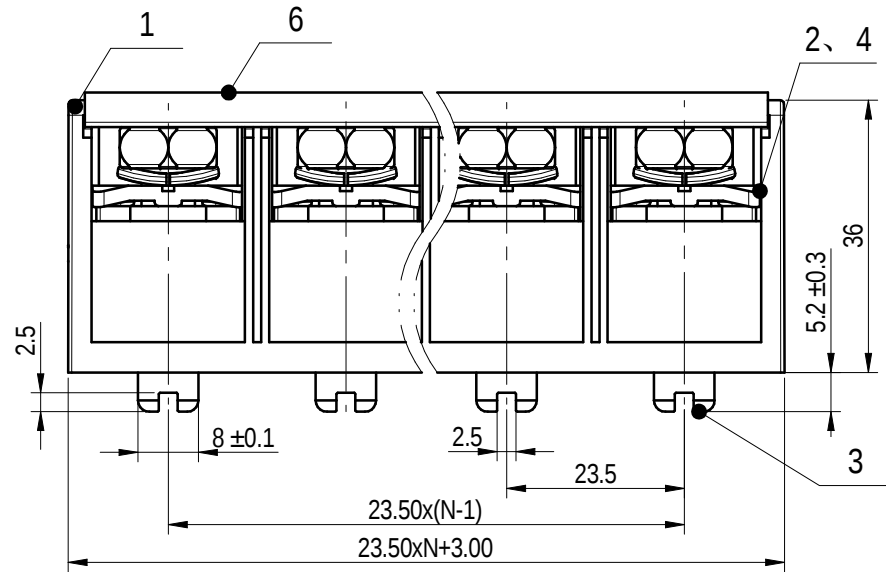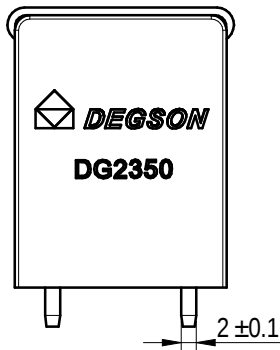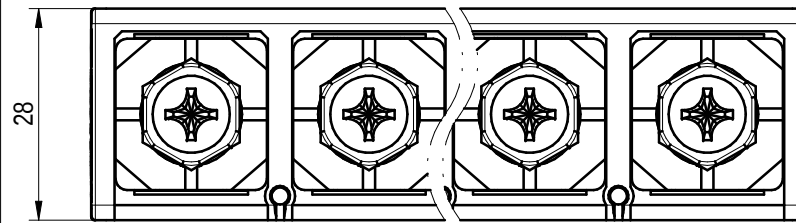


active

未注公差/General tolerances(mm)														0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2'
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		600/120	600/120	600/5
IEC 标准/IEC Standard:				
额定电压/电流/Rated Voltage(V)/Current(A)		750/120		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		6		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M8, 5.5/48.80		
极限扭矩/LimitTorque Tightening(N·m)		≥15		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		35~50 / 2~1/0		
间距/Pitch(mm)/线数范围/Poles		23.5/N=02~06P		
使用温度范围/Operating temperature(°C)		-40~+120		
符合RoHS环保要求/Conform to RoHS		Yes		

PCB LAYOUT

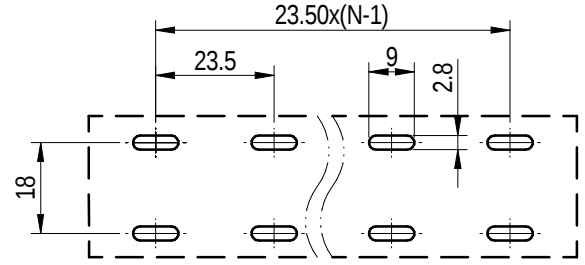

Notes: The A&Z(H) in the name means:A(H) and Z(H)

6	Cover	PC	UL94V-2
5	Clapboard	PVC	/
4	Screw	Steel	M8/Zn-Ni Plated
3	Pin_header	Copper alloy	Sn Plated
2	Nut	Steel	M8/Zn-Ni Plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

			MATERIAL: /		SURFACE/COLOR: /	
			MAT NO./REV: / / 00		MAT STATUS: 批量	
APPD:	蓝贵凡	2023.10.26	NAME DG2350-XXP-1Y-00A&Z (H)			
CHKD:	曹利彬	2023.10.26				
DRFT:	汪德荣	2023.10.26	DRAWING NO. 200065056	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SCALE 2:1
 A4		 (inch)				

00	/	/	汪德荣	2023.10.26		
REV	ECN	DESCRIPTION	DRFT	DATE		