


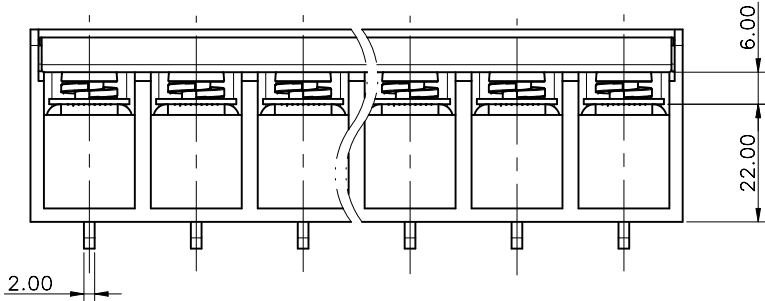





(W/O COVER VIEW)

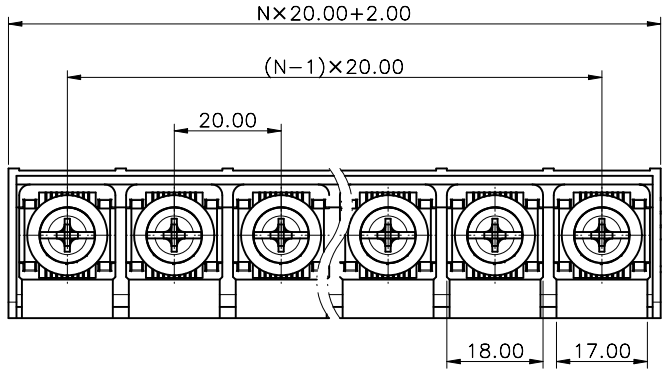

公差/General tolerances (mm)														0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	



PCB LAYOUT

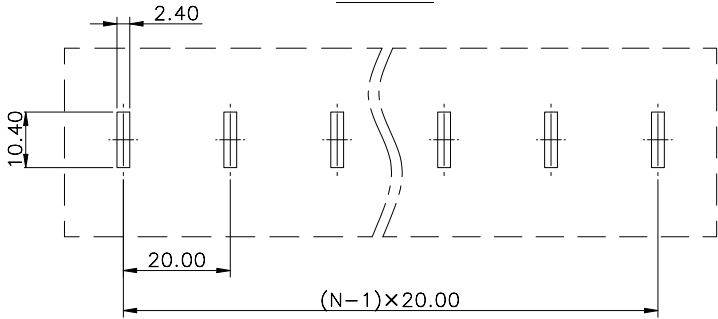

Note: The A&Z (H) in the name means: A(H) and Z(H).

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/75		
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M6: 2.4/22.15		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	26~4		
间距/Pitch(mm)/线数范围/Poles	20.00/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON		MATERIAL: /		SURFACE: /	
APPD: 廖黄凡	2023.04.18	MAT NO./REV:	- / 00	MAT STATUS:	批量
CHKD: 曹利彬	2023.04.18	NAME			
DRFT: 姜民洁	2023.04.18	DG2000-B-XXP-1Y-00A&Z(H)			
REV	ECN	DESCRIPTION	DRFT	DATE	
④	≡	A3	mm (inch)	200014811	
		TYPE	CUSTOMER DRAWING	DRAWING STATUS	SCALE
				已发布	1:1
				SHEET	1/1