



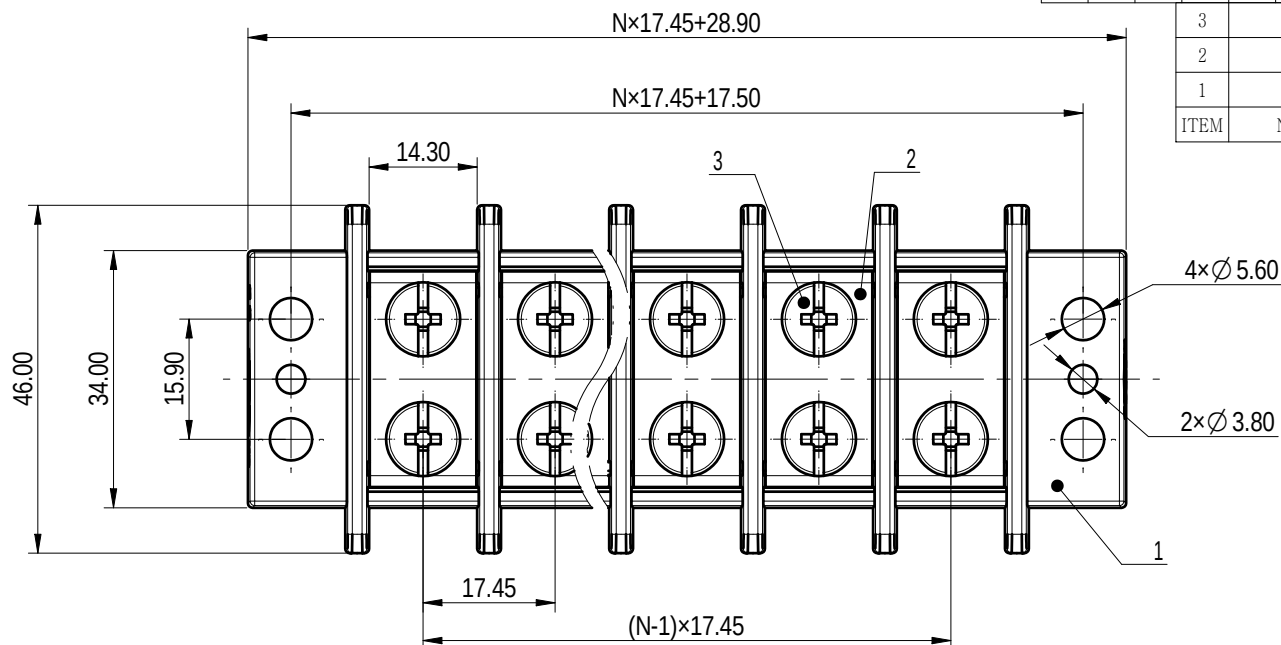

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2°

3	Screw	Steel	Zn Plated
2	Current carrier	Copper alloy	Sn Plated
1	Housing	PC	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

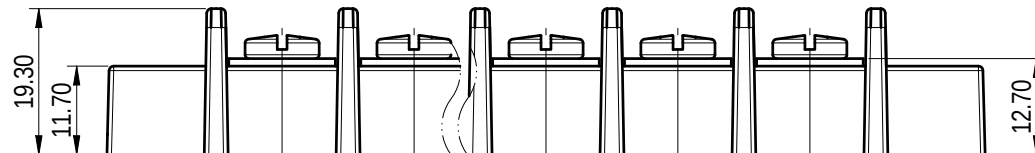

Note: The A&Z(H) in the name means: A(H) and Z(H).

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/30	600/30	/
	600/75	600/75	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M5, 1.9/17.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	10~14 (600V/30A)		
	4~14 (600V/75A)		
间距/Pitch(mm)/线数范围/Poles	17.45/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR:		
APPD: 蓝贵凡 2023.05.16		MAT NO./REV:	- / 00		
CHKD: 曹利彬 2023.05.16		NAME	DG99-A-XXP-1Y-00A&Z(H)		
DRFT: 姜民洁 2023.05.16		DRAWING NO.	TYPE	DRAWING STATUS	SCALE
A4		200194843	CUSTOMER DRAWING	已发布	1:1
					SHEET 1/1

00					
REV	ECN	DESCRIPTION	DRFT	DATE	