
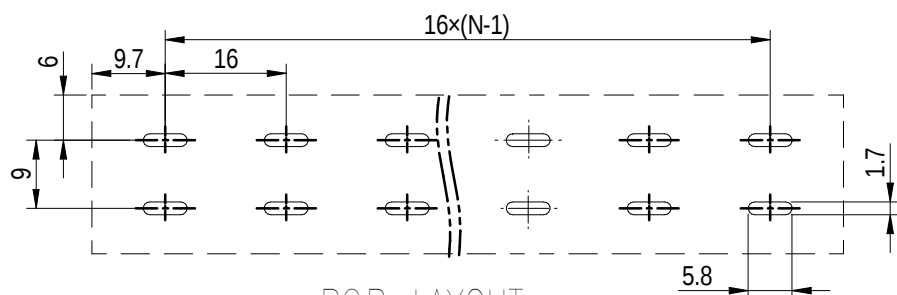

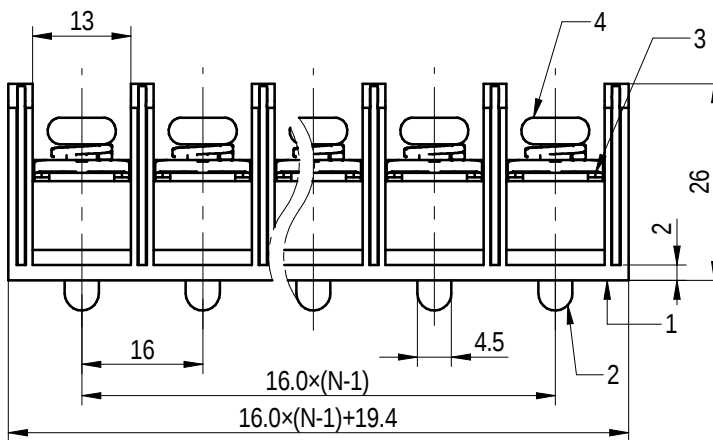
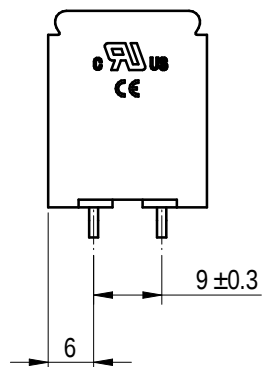
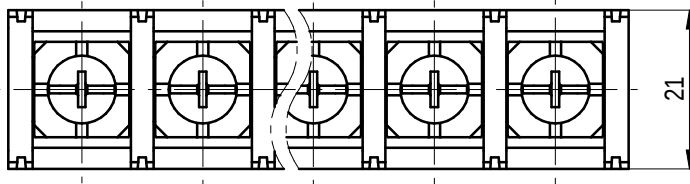


active

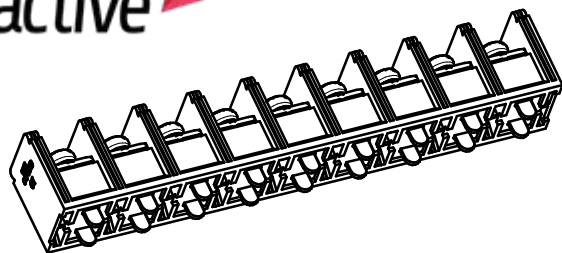

PCB LAYOUT

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

4	Screws	Steel	M5/Ni Plated
3	Nut	Steel	M5/Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600V/110A	600V/110A	600V/5A
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	800/101	1000/101	1000/101
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	6
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M5, 2.5/22		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	8~2/ 6~25		
间距/Pitch(mm)/线数范围/Poles	16/N=2P~20P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

			MATERIAL:		SURFACE/COLOR:		
APPD:			MAT NO./REV:		MAT STATUS: 批量		
CHKD:			NAME DG88-XXP-13-00Z(H)				
DRFT:							
 A4			DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
			200069035	CUSTOMER DRAWING	work	1:1	1/1