


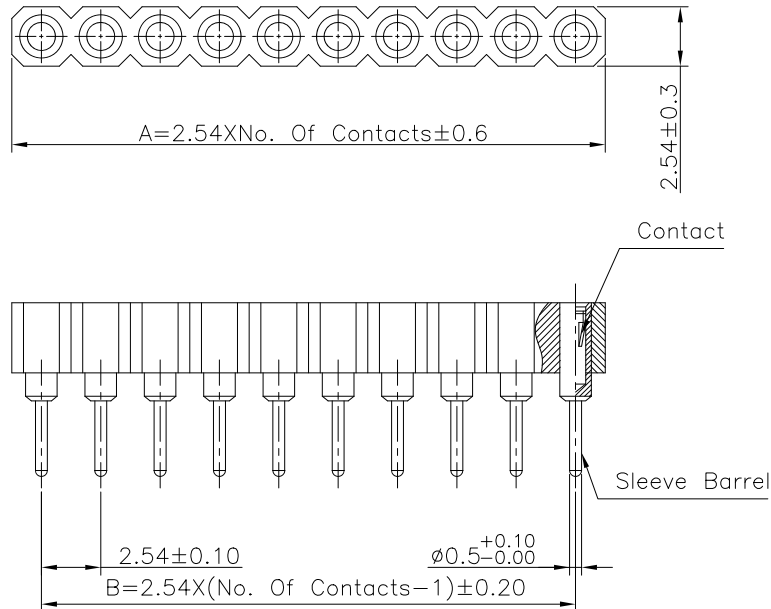


Dimension Information:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	5.08	2.54	12	30.48	27.94	22	55.88	53.34	32	81.28	78.74
3	7.62	5.08	13	33.02	30.48	23	58.42	55.88	33	83.82	81.28
4	10.16	7.62	14	35.56	33.02	24	60.96	58.42	34	86.36	83.82
5	12.70	10.16	15	38.10	35.56	25	63.50	60.96	35	88.90	86.36
6	15.24	12.70	16	40.64	38.10	26	66.04	63.50	36	91.44	88.90
7	17.78	15.24	17	43.18	40.64	27	68.58	66.04	37	93.98	91.44
8	20.32	17.78	18	45.72	43.18	28	71.12	68.58	38	96.52	93.98
9	22.86	20.32	19	48.26	45.72	29	73.66	71.12	39	99.06	96.52
10	25.40	22.86	20	50.80	48.26	30	76.20	73.66	40	101.60	99.06
11	27.94	25.40	21	53.34	50.80	31	78.74	76.20			

Specifications:

Current rating:3.0A AC/DC
Voltage rating:100V AC/DC
Contact resistance:20m ohm. max.
Insulator resistance:1000M ohm. Min.
Withstanding voltage:1000V AC for one minute
Operating temperature range:-40°C to +105°C




Material and Finish:

Insulator:High Temp. Plastic(UL94V-0)
Standard Color:Black
Contact:Copper Alloy, Gold Plated
Sleeve Barrel:Copper Alloy, Gold/Bright Tin Plated


How To Order

6604S-XXX

Blank Contact Area Gold Plated,
Sleeve Barrel Bright Tin Plated. 
G:Contact Area Gold Plated,
Sleeve Barrel Gold Plated
G10:Contact Area 10u" Gold Plated,
Sleeve Barrel Gold Plated
No. of Contacts
Socket Single Row

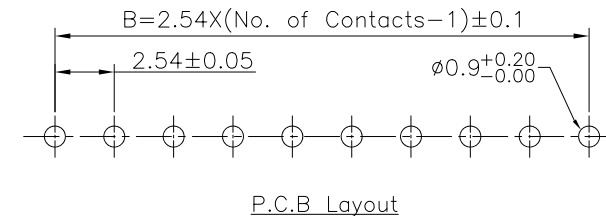

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Neltron Industrial Co., Ltd.	
E				LISY	.X=±0.20 .XX=±0.15		
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
C				JERRY	SCALE: 1:1	2.54mm Machine Pin Socket Single Row	A4
B	21-MAY-2024	Add Plated Options	LUCY	APPROVAL:	SHEET: 1/1	PART NO:	
A	09-AUG-2021		JERRY	RORY	PROJECTION: 	6604S-XXX	
REV	DATE	FILE	BY				