



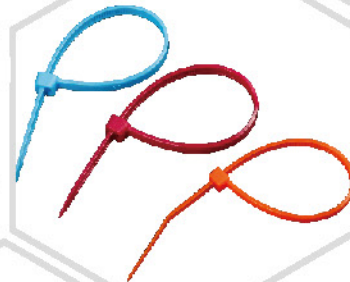

东莞市吉诺塑胶制品有限公司
Dongguan Gino Plastic Products Co., Ltd.


active

产品综合目录



PRODUCT

CATALOGUE

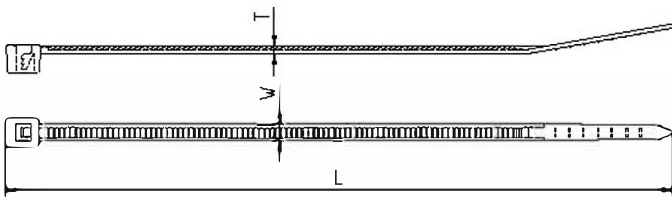

*可定制尺寸, 及定制logo, 文字, 商标, 序列号等。
*Custom size cable tie and custom printed text, logo, serial No. on the tie as you need.

材料:

采用UL认可的尼龙PA66原料制成, 耐酸, 耐腐蚀, 承受力强, 绝缘性能好, 不易老化。阻燃等级UL94V-2。
可根据客户需求生产尼龙PA46 材料, 或其他指定材料产品。

颜色:

本色, 黑色, 彩色, 及定制颜色。

操作温度:

标准温度范围-20°C~85°C, 可根据需求提供低温环境-40°C~85°C适用的产品, 及高温环境-20°C~120°C, -20°C~150°C适用的产品, 可根据需求定制高低温适用的产品。

证书:

UL RoHS Reach 无卤素 PAFs EN45545等。

应用:

广泛应用于汽车行业、电子通讯、轨道交通、家用电器、机械设备、医疗器材、电动玩具、船舶、建筑、包装、园艺等行业。

Raw material:

UL approved polyamide 6,6 raw material. Resistance to acids and corrosion. With good tensile strength and insulation. Also anti-aging. Flammability UL94V-2.
Can provide PA46 or other required raw material.

Color:

Red, yellow, blue, white, green, and other custom color available

Operating temperature:

Standard temperature -20°C~85°C, also can provide -40°C~80°C, -20°C~120°C, -20°C~150°C operating temperature according to your requirements.

Certificates:


UL RoHS Reach Halogen-Free PAFs, etc.

Application:

Widely been used in automobiles wire harness, household appliances, electronic communications devices, railway transportation, mechanical equipment, medical equipment, electric toys, ships, construction, packaging, horticulture and other industries.

型号 Part No.	尺寸 Size	宽 Width		长 Length		最大捆绑范围 Max.Bundle Dia.		最小环状拉力 Min. Loop Tensile Strength	
	mm	mm	inch	mm	inch	mm	inch	kgs	lbs
BW-100MF	2.0*100	2.0	0.08	100	3.94	22	0.87	7.00	16.0
BW-60MG	2.3*60	2.3	0.09	60	2.37	11	0.44	5.00	11.0
BW-100MG	2.3*100	2.3	0.09	100	3.94	22	0.87	7.00	16.0
BW-120MG	2.3*120	2.3	0.09	120	4.73	30	1.19	7.00	16.0
BW-80MP	2.5*80	2.5	0.10	80	3.15	15	0.60	8.10	18.0
BW-100MP	2.5*100	2.5	0.10	100	3.94	22	0.87	8.10	18.0
BW-120MP	2.5*120	2.5	0.10	120	4.73	30	1.19	8.10	18.0
BW-135M	2.5*135	2.5	0.10	135	5.29	32	1.26	8.10	18.0
BW-140M	2.5*142	2.5	0.10	142	5.56	32	1.26	8.10	18.0
BW-150MP	2.5*150	2.5	0.10	150	5.91	35	1.38	8.10	18.0
BW-160MP	2.5*160	2.5	0.10	160	6.27	40	1.57	8.10	18.0
BW-200MP	2.5*200	2.5	0.10	200	7.88	53	2.09	8.10	18.0
BW-200IE	3.0*200	3.0	0.12	200	7.88	53	2.09	15.00	33.0
BW-250IE	3.0*250	3.0	0.12	250	9.85	65	2.56	15.00	33.0
BW-300IE	3.0*300	3.0	0.12	300	11.75	76	2.98	15.00	33.0
BW-100I	3.6*100	3.6	0.15	100	3.94	22	0.87	18.20	40.0
BW-120I	3.6*120	3.6	0.15	120	4.73	30	1.19	18.20	40.0
BW-140I	3.6*140	3.6	0.15	140	5.52	32	1.26	18.20	40.0
BW-150IP	3.6*150	3.6	0.15	150	5.91	35	1.38	18.20	40.0
BW-200IP	3.6*200	3.6	0.15	200	7.88	53	2.09	18.20	40.0
BW-225I	3.6*225	3.6	0.15	225	8.81	58	2.28	18.20	40.0
BW-250IP	3.6*250	3.6	0.15	250	9.85	65	2.56	18.20	40.0
BW-300IP	3.6*300	3.6	0.15	300	11.82	76	3.00	18.20	40.0
BW-350I	3.6*350	3.6	0.15	350	13.78	90	3.55	18.20	40.0
BW-370IP	3.6*370	3.6	0.15	370	14.57	102	4.02	18.20	40.0
BW-500STE	4.5*500	4.5	0.18	500	19.69	140	5.52	20.00	44.0
BW-120ST	4.8*120	4.8	0.19	120	4.73	30	1.19	22.20	49.0
BW-160ST	4.8*160	4.8	0.19	160	6.30	40	1.58	22.20	49.0
BW-200STP	4.8*200	4.8	0.19	200	7.88	53	2.09	22.20	49.0
BW-250STP	4.8*250	4.8	0.19	250	9.85	65	2.56	22.20	49.0
BW-300STP	4.8*300	4.8	0.19	300	11.82	76	3.00	22.20	49.0
BW-350ST	4.8*350	4.8	0.19	350	13.78	90	3.55	22.20	49.0
BW-370STP	4.8*370	4.8	0.19	370	14.57	102	4.02	22.20	49.0
BW-400STP	4.8*400	4.8	0.19	400	15.75	105	4.14	22.20	49.0
BW-430ST	4.8*430	4.8	0.19	430	16.93	110	4.34	22.20	49.0
BW-450ST	4.8*450	4.8	0.19	450	17.72	115	4.53	22.20	49.0
BW-530ST	4.8*530	4.8	0.19	540	21.43	140	5.52	22.20	49.0
BW-550ST	4.8*550	4.8	0.19	550	21.66	165	6.50	22.20	49.0
BW-650ST	4.8*650	4.8	0.19	650	25.60	190	7.49	22.20	49.0
BW-300HDF	7.0*300	7.0	0.28	300	11.82	76	3.00	36.00	80.0
BW-350HDF	7.0*350	7.0	0.28	350	13.78	90	3.55	36.00	80.0
BW-200HT	7.6*200	7.6	0.30	200	7.88	53	2.09	54.00	119.0
BW-250HT	7.6*250	7.6	0.30	250	9.85	65	2.56	54.00	119.0

型号 Part No.	尺寸 Size	宽 Width		长 Length		最大捆绑范围 Max.Bundle Dia.		最小环状拉力 Min. Loop Tensile Strength	
	mm	mm	inch	mm	inch	mm	inch	kgs	lbs
BW-300HTP	7.6*300	7.6	0.30	300	11.82	76	3.00	54.00	119.00
BW-370HTP	7.6*370	7.6	0.30	370	14.57	102	4.02	54.00	119.00
BW-400HT	7.6*400	7.6	0.30	400	15.70	105	4.10	54.00	119.00
BW-430HT	7.6*430	7.6	0.30	430	16.93	110	4.34	54.00	119.00
BW-450HT	7.6*450	7.6	0.30	450	17.72	115	4.53	54.00	119.00
BW-500HT	7.6*500	7.6	0.30	500	19.69	130	5.12	54.00	119.00
BW-530HT	7.6*530	7.6	0.30	530	20.87	140	5.52	54.00	119.00
BW-450HD	8.3*450	8.3	0.32	450	17.80	115	4.50	75.00	165.00
BW-650HD	8.3*650	8.3	0.32	650	25.60	190	7.49	75.00	165.00
BW-400HDP	8.7*400	8.7	0.35	400	15.75	105	4.14	80.00	132.00
BW-500HDA	8.7*500	8.7	0.35	500	19.69	150	5.91	80.00	132.00
BW-550HDP	8.7*550	8.7	0.35	550	21.66	165	6.50	80.00	132.00
BW-600HD	8.7*600	8.7	0.35	600	23.63	170	6.70	80.00	132.00
BW-650HDW	8.7*650	8.7	0.35	650	25.60	190	7.49	80.00	132.00
BW-720HD	8.7*720	8.7	0.35	720	28.35	185	7.29	80.00	132.00
BW-760HDP	8.7*760	8.7	0.35	760	29.93	222	8.75	80.00	132.00
BW-820HD	9.0*820	9.0	0.36	820	32.29	230	9.06	80.00	132.00
BW-920HD	9.0*920	9.0	0.36	920	36.23	264	10.40	80.00	132.00
BW-500HDW	10*500	10.0	0.40	500	19.69	150	5.91	114.00	250.00
BW-800HD	10*800	10.0	0.40	800	31.40	230	9.10	114.00	250.00

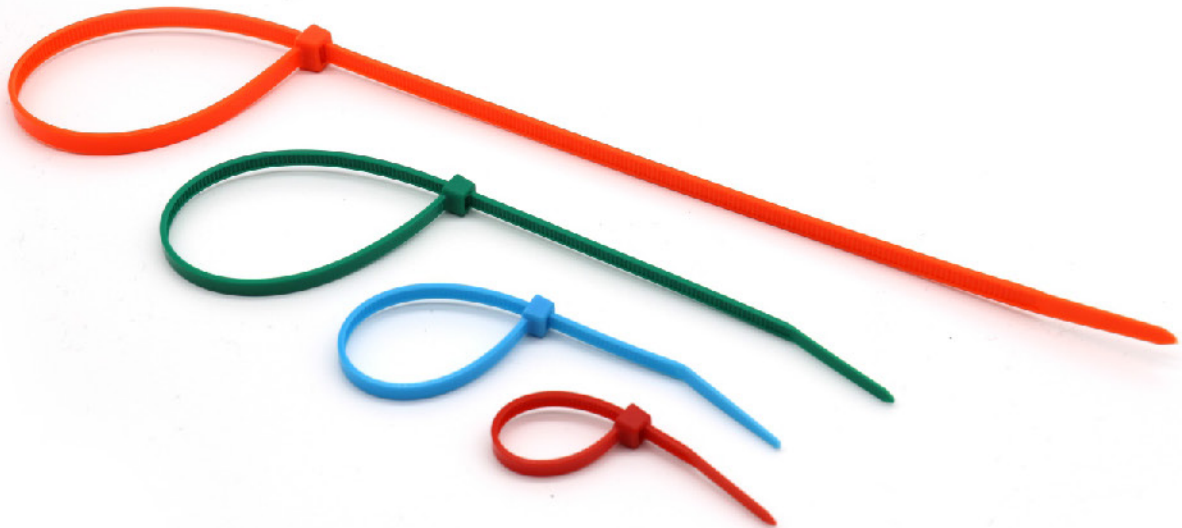

机打专用扎带

Automatic Machine Bundling Cable Tie

2.0



材料:

采用UL认可的尼龙PA66原料制成,耐酸,耐腐蚀,承受力强,绝缘性能好,不易老化。阻燃等级UL94V-2。

颜色:

本色,黑色,彩色,及定制颜色。

应用:

标准温度范围-20°C~85°C,可根据需求提供低温环境-40°C~85°C适用的产品,及高温环境-20°C~120°C, -20°C~150°C适用的产品

证书:

UL RoHS Reach 无卤素 PAFs 等。

Raw material:

UL approved polyamide 6,6 raw material. Resistance to acids and corrosion. With good tensile strength and insulation. Also anti-aging. Flammability UL94V-2.

Color:

Natural, black, colored, custom color available.


Operating temperature:

Standard temperature are -20°C~85°C, also can provide -40°C~80°C, -20°C~120°C, -20°C~150°C operating temperature according to your requirements. Ideal for cable tie bundling machine, high efficiency, save time and cost.

Certificates:

UL RoHS Reach Halogen-Free PAFs, etc.

型号 Part No.	尺寸 Size	宽 Width		长 Length		最大捆绑范围 Max.Bundle Dia.		最小环状拉力 Min. Loop Tensile Strength	
	mm	mm	inch	mm	inch	mm	inch	kgs	lbs
BW-80ME	1.8*80	1.8	0.07	80	3.15	15	0.60	3.0	6.60
BW-80MF	2.0*80	2.0	0.08	80	3.15	15	0.60	5.0	11.00
BW-100MF	2.0*100	2.0	0.08	100	3.94	22	0.87	7.0	16.00
BW-60MG	2.3*60	2.3	0.09	60	2.37	11	0.44	5.0	11.00
BW-80MP	2.5*80	2.5	0.10	80	3.15	15	0.60	8.1	18.00
BW-100MP	2.5*100	2.5	0.10	100	3.94	22	0.87	8.1	18.00
BW-120MP	2.5*120	2.5	0.10	120	4.73	30	1.19	8.1	18.00
BW-135M	2.5*135	2.5	0.10	135	5.29	32	1.26	8.1	18.00
BW-140M	2.5*142	2.5	0.10	142	5.56	32	1.26	8.1	18.00
BW-150MP	2.5*150	2.5	0.10	150	5.91	35	1.38	8.1	18.00
BW-160MP	2.5*160	2.5	0.10	160	6.27	40	1.57	8.1	18.00
BW-200MP	2.5*200	2.5	0.10	200	7.88	53	2.09	8.1	18.00
BW-100I	3.6*100	3.6	0.15	100	3.94	22	0.87	18.2	40.00
BW-120I	3.6*120	3.6	0.15	120	4.73	30	1.19	18.2	40.00
BW-150IP	3.6*150	3.6	0.15	150	5.91	35	1.38	18.2	40.00
BW-120ST	4.8*120	4.8	0.19	120	4.73	30	1.19	22.2	49.00

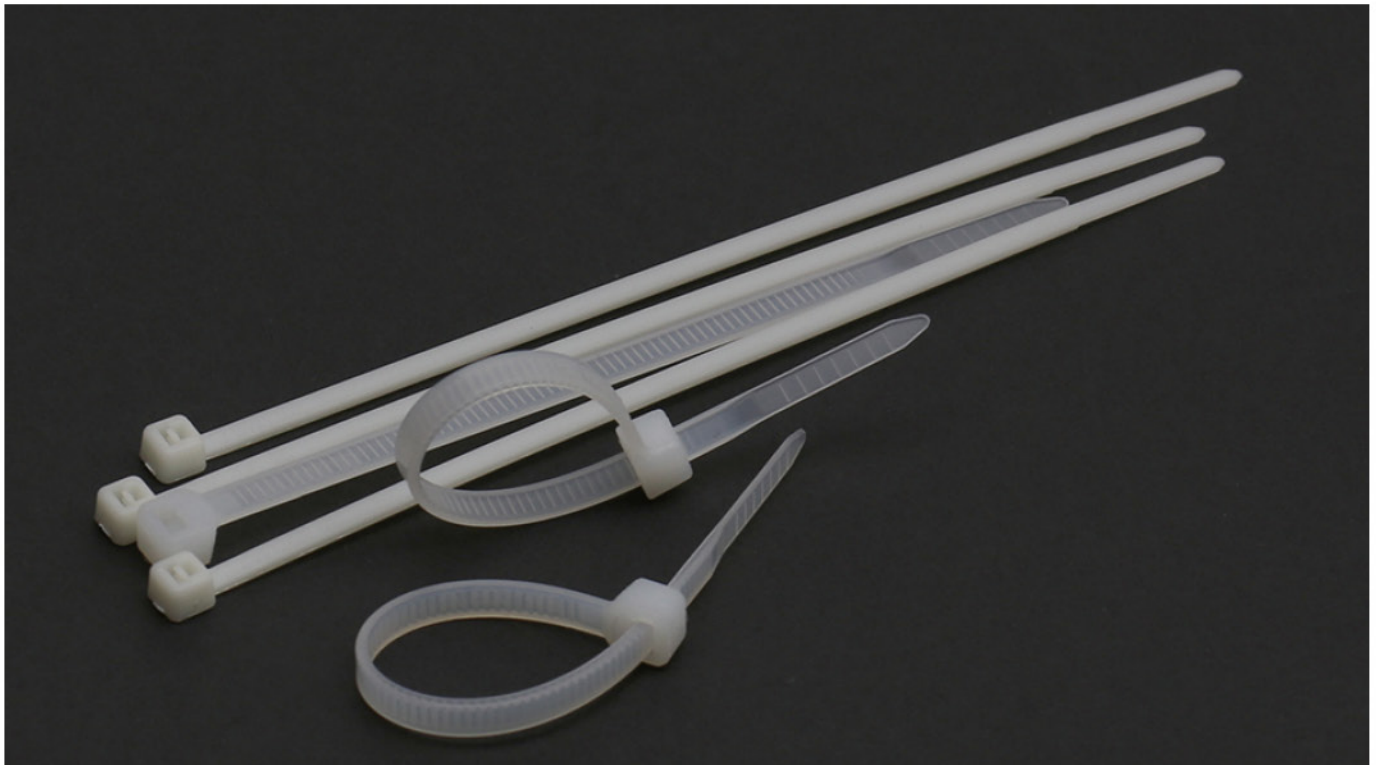

反齿扎带

Outside Serrated Cable Tie

3.0

材料:

采用UL认可的尼龙PA66原料制成, 防火等级UL94V-2.

特性:


外侧锯齿形扎带与一般的扎带不同, 束扎线缆时锯齿出现在线缆外侧, 整体结构不易损伤线缆的表面, 最适合于束扎具有柔软包覆层的无卤线缆。

Raw material:


UL approved polyamide 6,6 raw material, flammability UL94V-2.

Product Feature:

Outside serrated cable tie are different than standard cable ties, which are serrated outside the wires and cables after bundle. Ideal products for thin-walled or soft insulation wires and cables.

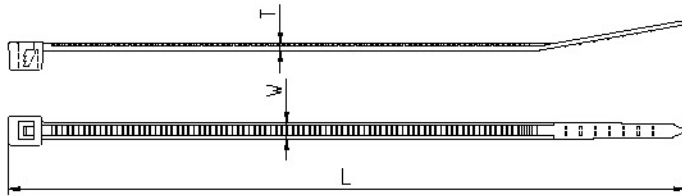

型号 Part No.	尺寸 Size	宽 Width		长 Length		最大捆绑范围 Max.Bundle Dia.		最小环状拉力 Min. Loop Tensile Strength	
	mm	mm	inch	mm	inch	mm	inch	kgs	lbs
BW-80MT	2.5*80	2.5	0.10	80	3.14	15	0.59	8.10	17.82
BW-100MT	2.5*100	2.5	0.10	100	3.92	22	0.87	8.10	17.82
BW-120MT	2.5*120	2.5	0.10	120	4.70	28	1.10	8.10	17.82
BW-150IT	3.6*150	3.6	0.15	150	5.88	35	1.38	18.20	40.04
BW-200IT	3.6*200	3.6	0.15	200	7.84	53	2.08	18.20	40.04
BW-200STT	4.7*200	4.7	0.19	200	7.84	53	2.08	22.20	48.84
BW-385HTT	7.6*385	7.6	0.30	385	15.08	105	4.12	40.00	88.00

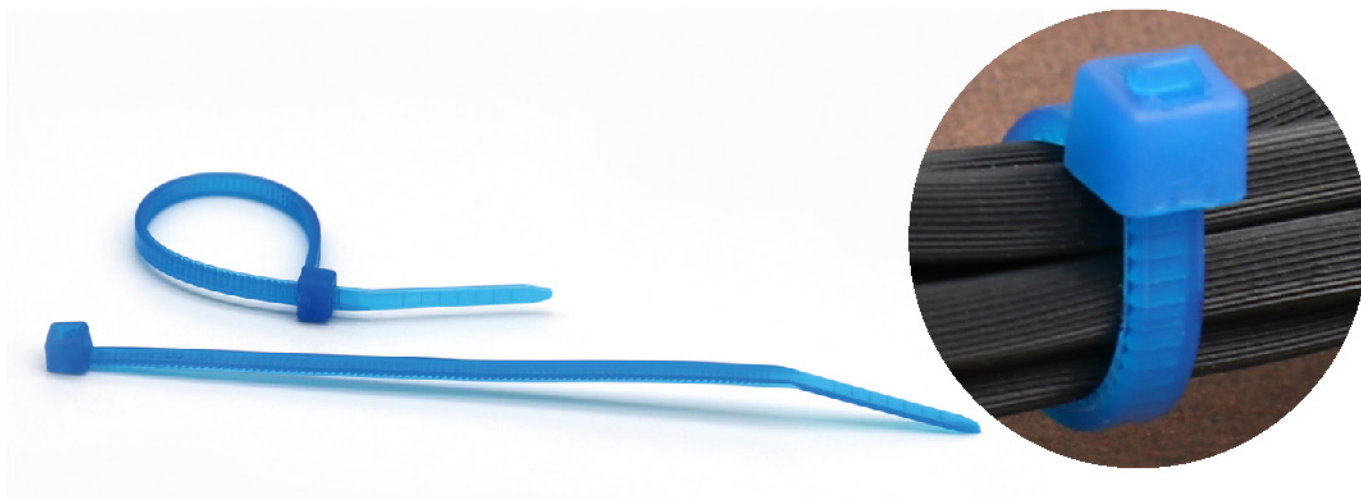

材料:

采用UL认可的ETFE原料制成,防火等级UL94V-0,具有比66尼龙更高的耐热特性。

操作温度:


标准温度范围-60°C~200°C

Raw material:

UL approved ETFE raw material, flammability UL94V-0. With better heat resistance performance than polyamide 66 raw material.

Operating temperature:

Standard temperature -60°C~200°C

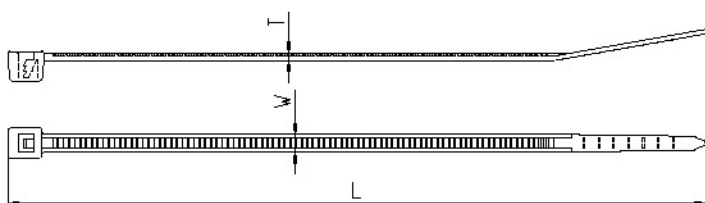

型号 Part No.	尺寸 Size	宽 Width		长 Length		最大捆绑范围 Max.Bundle Dia.		最小环状拉力 Min. Loop Tensile Strength	
	mm	mm	inch	mm	inch	mm	inch	kgs	lbs
BW-100MFA	2.5*100	2.5	0.10	100	3.94	22	0.87	8.10	18.00
BW-150IF	3.6*150	3.6	0.14	150	5.90	35	1.38	18.20	40.00
BW-200IF	3.6*200	3.6	0.14	200	7.80	53	2.09	18.20	40.00
BW-200STF	4.6*200	4.6	0.18	200	7.80	50	1.97	22.20	50.00
BW-300STF	4.8*300	4.8	0.19	300	11.80	76	2.99	22.20	50.00
BW-370STF	4.8*370	4.8	0.19	370	14.50	102	4.02	22.20	50.00